

SANYO

TROUBLESHOOTING GUIDE

2012 MODELS

DP32642-01

This guide is divided into 4 sections/pages depending on type of defect:

page 1)No Green LED Power Light.(LED never turns“ON”)

page 2)Green LED Light is “ON”, but Backlights are not “ON”,or only turn“ON & then OFF”.

page 3)Green LED Light is “ON”,and Backlights are “ON”,but there is no video/OSD.

page 4)Green LED Light turns “ON”, but turns “OFF”within 10 seconds.

Note: Power board and Analog board are same board, so we call it power board.

Please select the section/page that matches your defect and follow the flow chart.

These models & chassis versions are in this guide:


DP32642-01

PLEASE KEEP THIS GUIDE.

IT WILL NOT BE PROVIDED FOR EVERY REPAIR.

Repair Flow Chart: Trouble Condition

Green Power LED does not turn on. The TV is dead.

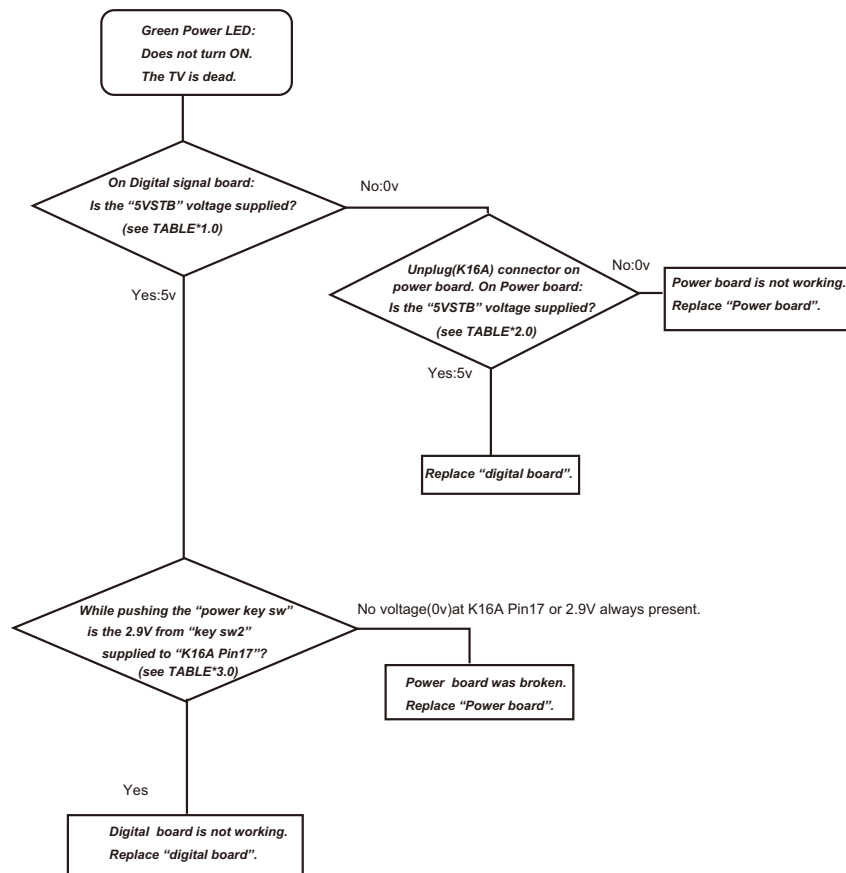

(TABLE *1.0) Digital board:5VSTB Test Points

32" Models		5VSTB on Digital board	Confirmation Voltage
DP32642-01	Z6TF	Digital K5A Pin3 or Pin4	5V

(TABLE *2.0) Power board:5VSTB Test Points

32" Models		5VSTB on Power board	Confirmation Voltage
DP32642-01	Z6TF	Power K16A Pin3 or Pin4	5V


(TABLE *3.0) Analog board: Key_SW2 Test Points

32" Models		Key_SW2 on Power board	Confirmation Voltage
DP32642-01	Z6TF	Power K16A Pin17	2.9V

Repair Flow Chart: Trouble Condition

Green Power is on, but LCD backlights are not on.

Backlights do not turn on, or only turn on and back off.

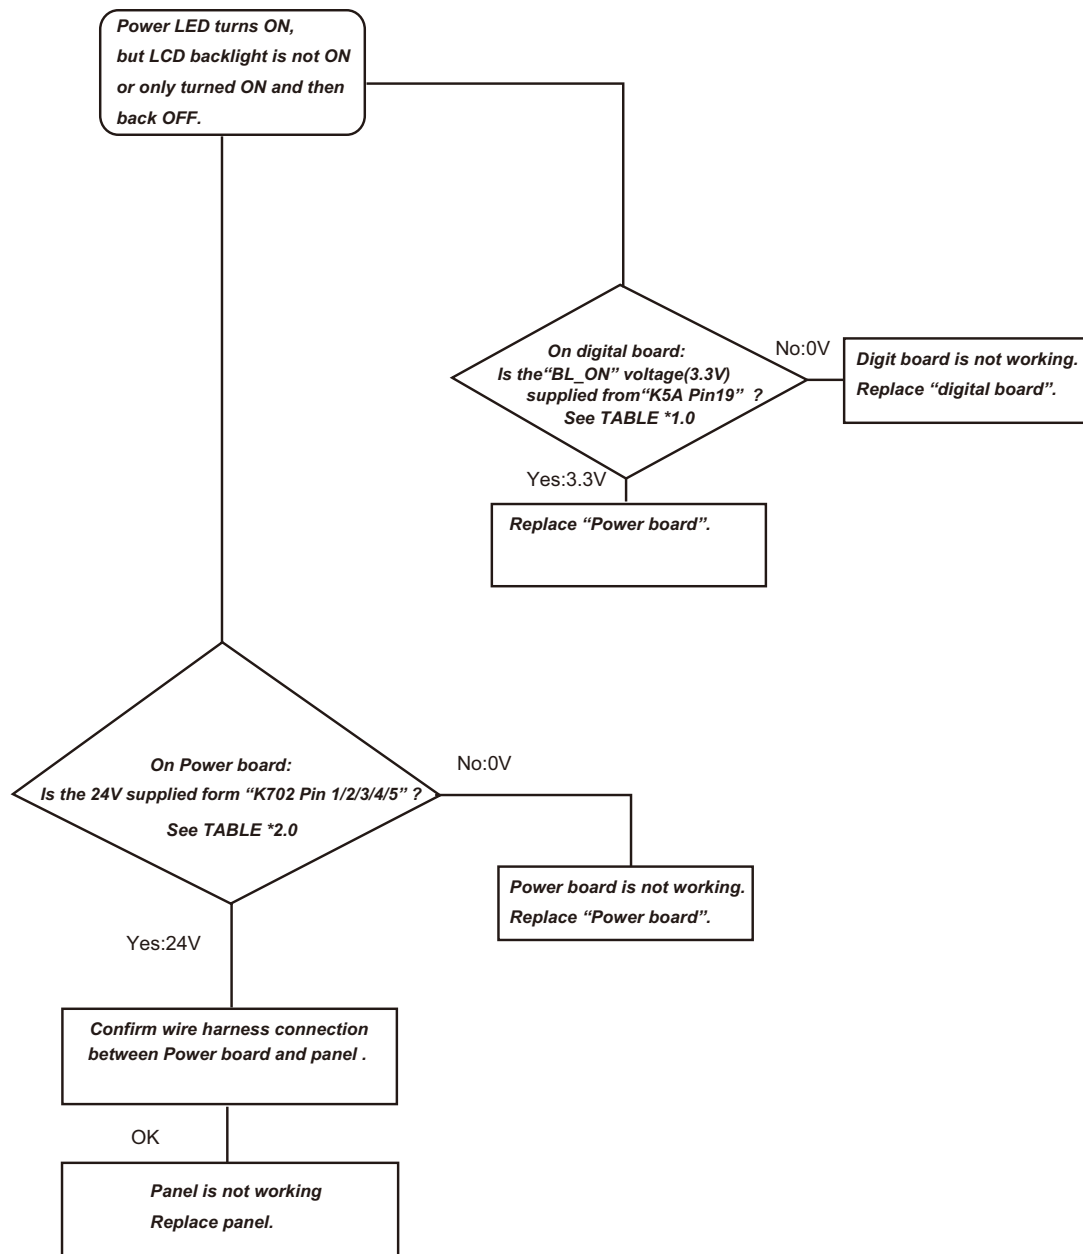

(TABLE *1.0) Digital board: 3.3V Test Points


32" Models		BL_On on Digital board	Confirmation Voltage
DP32642-01	Z6TF	Digital K5A Pin19	3.3V

(TABLE *2.0) Power board: 24V Test Points

32" Models		24V on Power board	Confirmation Voltage
DP32642-01	Z6TF	Power K702 Pin1/2/3/4/5	24V

Repair Flow Chart: Trouble Condition

Green Power LED and LCD backlights are ON, but no video or OSD.

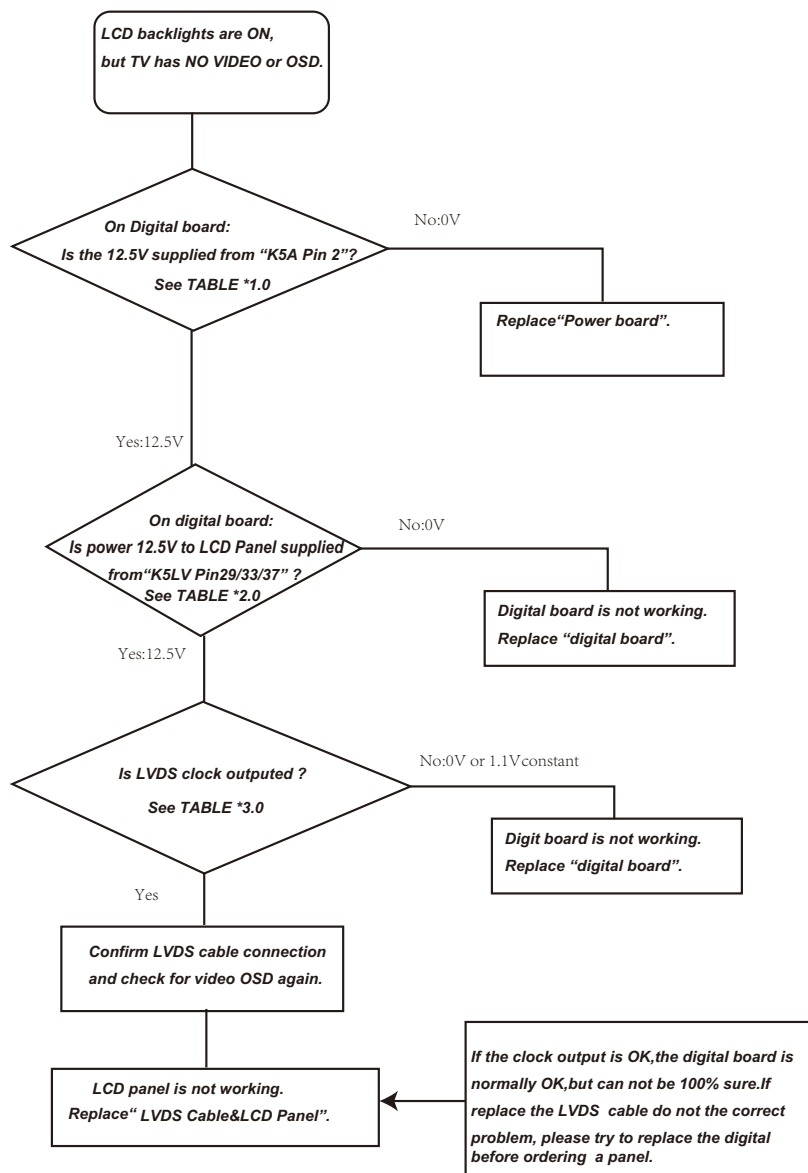

(TABLE *1.0) Digital board: 12.5V Test Points

32" Models		12.5V on Digital board	Confirmation Voltage
DP32642-01	Z6TF	Digital K5A Pin2	12.5V

(TABLE *2.0) Digital board: 12.5V Test Points

32" Models		12.5V on Digital board	Confirmation Voltage
DP32642-01	Z6TF	Digital K5LV Pin29/33/37	12.5V


(TABLE*3.0)Digital board:"LVDS Clock"Test Points

32" Models		LVDS Clock on Digital board	
DP32642-01	Z6TF	K5LV Pin6/26 clock+ K5LV Pin8/28 clock-	

Note:The bandwidth of the oscilloscope and probe must be at least 100MHZ or higher to check if the clock pulse exists.

Repair Flow Chart:Trouble Condition

Power LED turns OFF within 10 sec of power ON.

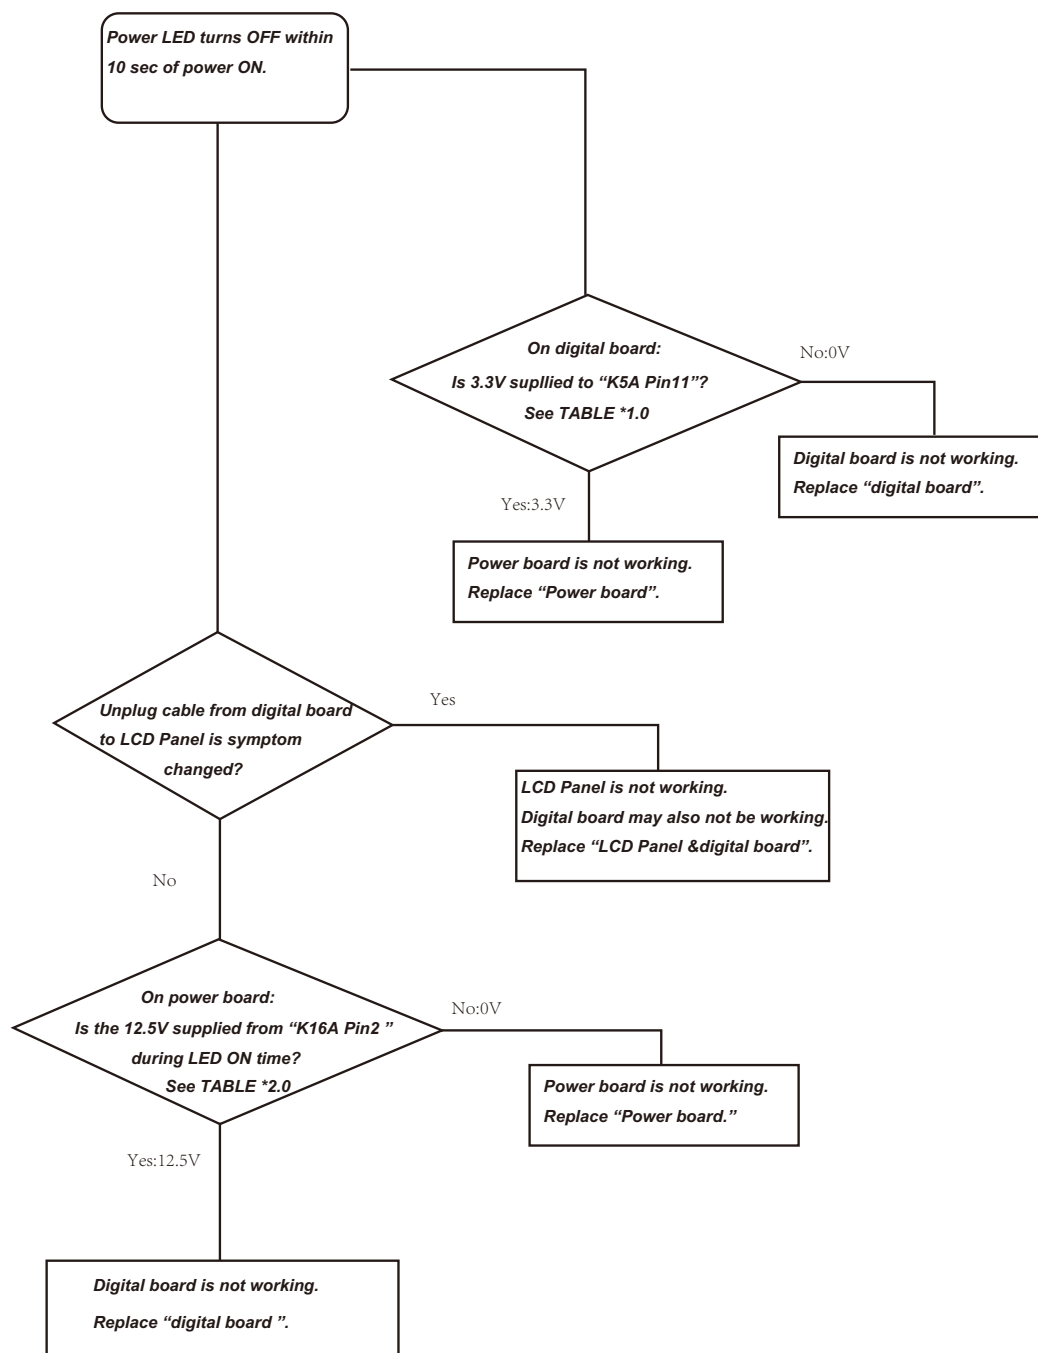

(TABLE *1.0) Digital board: 3.3V Test Points

32" Models		Power_ON on Digital board	Confirmation Voltage
DP32642-01	Z6TF	Digital K5A Pin11	3.3V

(TABLE *2.0)Power board: 12.5V Test Points

32" Models		12.5V on Power board	Confirmation Voltage
DP32642-01	Z6TF	Power K16A Pin2	12.5V



FILE No.

SERVICE MANUAL

Remote Control Digital Color Television

DP32642
(U.S.A.) (CANADA)
ORIGINAL VERSION



Chassis No. P32642-01

NOTE: Match the Chassis No. on the unit's back cover with the Chassis No. in the Service Manual.

If the Original Version Service Manual Chassis No. does not match the unit's, additional Service Literature is required. You **must** refer to "Notices" to the Original Service Manual prior to servicing the unit.

Servicing should be performed by only trained and qualified service personnel.

Contents

SAFETY INSTRUCTIONS	2
SERVICE ADJUSTMENTS	3
ON-SCREEN SERVICE MENU	4
POWER FAILURE CIRCUIT	5
MECHANICAL DISASSEMBLY	6
CHASSIS ELECTRICAL PARTS LIST	9
COMPONENT AND TEST POINT LOCATIONS	26
BLOCK DIAGRAM POWER LINES	28
BLOCK DIAGRAM SIGNAL LINES	29
IC BLOCK DIAGRAMS	30
TROUBLESHOOTING FLOW CHARTS	34
SCHEMATIC NOTES	37
IC, DIODE, AND TRANSISTOR PIN LAYOUTS	38
PC BOARD CONNECTIONS AND LOCATIONS	39
CAPACITOR AND RESISTOR CODE CHART	40
SCHEMATIC DIAGRAMS	41

Specifications

POWER RATING	120VAC 95 W (AVG.)
ANTENNA INPUT IMPEDANCE	75Ω UHF/VHF/CATV DIGITAL
RECEIVING CHANNEL	2 - 13 (VHF), 14 - 69 (UHF), 01, 14-94, 95-135 (CATV) 1-135 (DIGITAL)
REMOTE READY	32 KEY REMOTE CONTROL
SOUND OUTPUT	5.0 W/CH
INTERMEDIATE FREQUENCY	
PICTURE IF CARRIER	45.75MHz
SOUND IF CARRIER	41.25MHz
COLOR SUB CARRIER	42.17MHz
CABINET DIMENSIONS	
WIDTH	795mm
HEIGHT	549mm
DEPTH INCLUDING BASE	231mm

SAFETY INSTRUCTIONS

SAFETY PRECAUTIONS

WARNING: The chassis of this receiver has a floating ground with the potential of one half the AC line voltage in respect to earth ground. Service should not be attempted by anyone not familiar with the precautions necessary when working on this type of equipment.

The following precautions must be observed:

1. An isolation transformer must be connected in the power line between the receiver and the AC line before any service is performed on the receiver.
2. Comply with all caution and safety-related notes provided inside the cabinet, on the chassis, and on the back.
3. When replacing a chassis in the cabinet, always be certain that all the protective devices are installed properly, such as control knobs, adjustment covers, shields and barriers.
4. Before replacing the back cover of the set, thoroughly inspect the inside of the cabinet to see that no stray parts or tools have been left inside.

Before returning any television to the customer, the service technician must perform the following safety checks to be sure that the unit is completely safe to operate without danger of electrical shock.

ANTENNA COLD CHECK

Remove AC plug from the 120 VAC outlet and place a jumper across the two blades. Connect one lead of an ohmmeter to the jumpered AC plug, and touch the other lead to each exposed antenna terminal (UHF and VHF antenna terminals). The resistance must measure between 1M ohm and 5.2M ohm. Any resistance value below or above this range indicates an abnormality which requires corrective action.


LEAKAGE CURRENT CHECK

Plug the AC line cord directly into a 120 VAC outlet. (Do not use an isolation transformer for this check.) Use an AC voltmeter, that has 5000 ohms per volt or more sensitivity. Connect a 1500 ohm 10 watt resistor, paralleled by a 0.15 μ F 150 VAC capacitor, between a known good earth ground (water pipe, conduit, etc.) and all exposed metal parts of the cabinet (antennas, handle bracket, metal cabinet, screw heads, metal overlays, control shafts, etc.). Measure the AC voltage across the 1500 ohm resistor. The AC voltage should not exceed 750 mV. A reading exceeding 750 mV indicates that a dangerous potential exists. The fault must be located and corrected. Repeat the above test with the receiver power plug reversed.

NEVER RETURN A RECEIVER TO THE CUSTOMER WITHOUT TAKING THE NECESSARY CORRECTIVE ACTION.

PRODUCT SAFETY NOTICE

When replacing components in a receiver, always keep in mind the necessary product safety precautions. Pay special attention to the replacement of components marked with a ⚠ in the parts list and in the schematic diagrams. To ensure safe product operation, it is necessary to replace those components with the exact same PARTS.

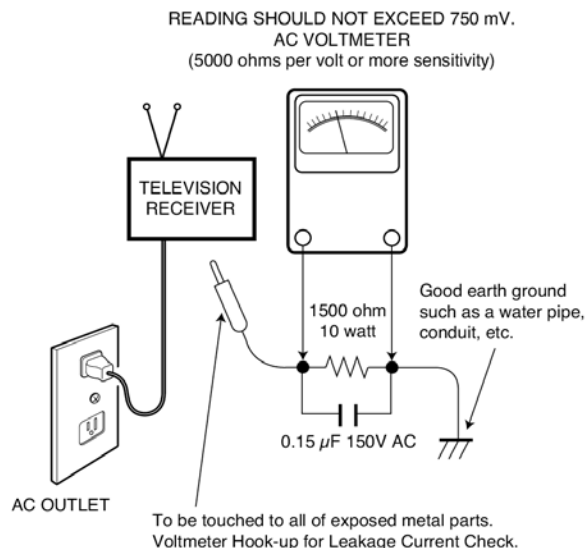

SERVICING ELECTROSTATICALLY SENSITIVE DEVICES

Semiconductors (solid-state devices) that can be damaged by static electricity are referred to as Electrostatically Sensitive (ES) devices. Examples of typical ES devices are: Integrated Circuits (IC), Field-Effect Transistors (FET), and "chip" components. The following techniques should be observed strictly, to reduce the occurrence of semiconductor damage due to electrostatic discharge.

1. Immediately prior to handling any semiconductor component or an assembly containing a semiconductor device or devices, discharge the electrostatic buildup on your body by touching a known earth ground. You may also obtain and wear a commercially available discharging wrist strap device.

CAUTION: Be sure to remove the wrist strap before applying power to any unit being serviced.

2. After removing an ES equipped assembly, place it on a conductive surface, such as, aluminum foil, to prevent buildup or exposure to static electricity.
3. Use only grounded-tip soldering irons to solder or unsolder ES devices.
4. Use only anti-static solder removal devices. Some suction-type devices can generate static electricity adequate to damage ES devices.
5. A replacement ES device will come packaged in protective material (conductive foam, aluminum foil, or some comparable conductive material). Do Not remove an ES device from its protective packaging unless you are prepared to install it immediately.
6. Precisely prior to removing an ES device from its protective packaging, touch the protective packaging to the chassis or assembly in which the device will be installed.

CAUTION: Be sure that no power is applied to the chassis or circuit assembly.

7. Incidental body movements, such as, lifting a foot from a carpeted floor or the rubbing of fabric together can generate static electricity sufficient to damage ES devices. Therefore, minimize all body movements while handling exposed (unpacked) ES devices.

SERVICE ADJUSTMENTS

GENERAL

This set has an On-screen Service Menu system included in the CPU that allows remote operation for most of the service adjustments.

ON-SCREEN SERVICE MENU SYSTEM

1. Enter the Service Menu:

- Turn off the receiver and disconnect the AC power supply.
- While pressing the Volume (➔) button on the television, reconnect the AC power supply. The Service Menu will now appear. The remote can now be used to make adjustments. See Figure 1 below.

ITEM NO.	TITLE	HEX DATA			
Index	ParameterName	Value	Def.	MIN	MAX
1	FACTORY_VOL	0x21	48	0	255



Figure 1. Service Menu Display

2. Service Adjustments:

- Press the Cursor ▲ and ▼ key to select the desired service menu item you want to adjust. See page 4 for the On-screen Service Menu.
- Use the Cursor ◀ or ▶ key to adjust the data. The ◀ or ▶ key will increase or decrease the data sequentially.

3. Exit from the Service Menu:

- Press the **MENU** key to turn off the Service Menu display.

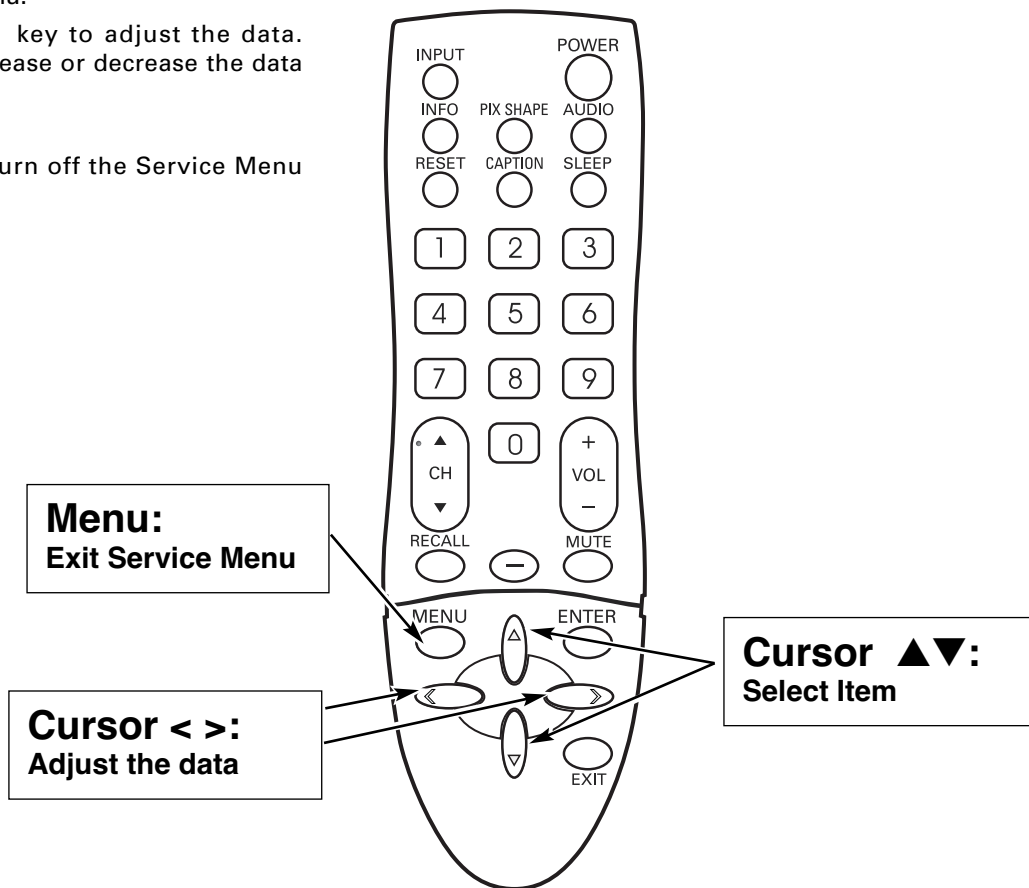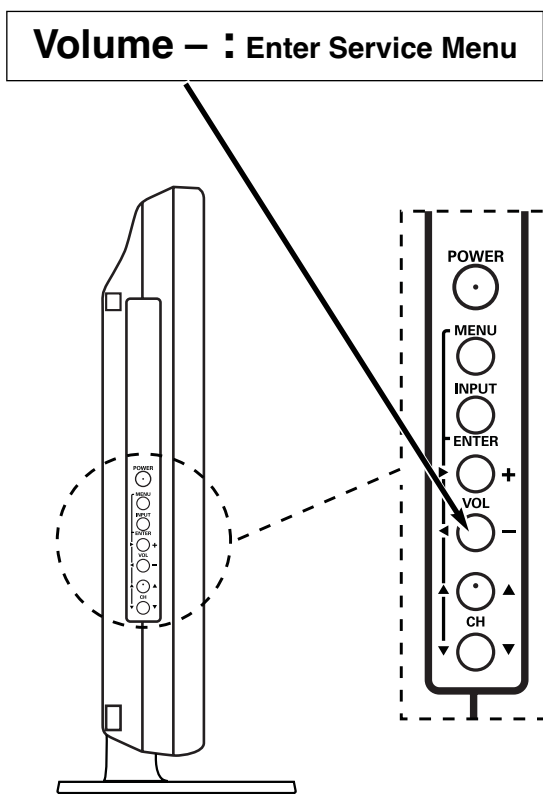

ON-SCREEN SERVICE MENU

Table 1. ON-SCREEN SERVICE MENU

When IC5750 (Flash Memory) is replaced, check the bus data to confirm they are the same as below. See page 3 for On-Screen Service Menu access and adjustments.

Index	ParameterName	Value	Min	Max
02	OP1	00h	0	255
03	OP2	0Fh	0	255

NOTES: Option 2 Data (Display Panel)

Option 1 and Option 2 data is initial and can be set according to adjustment information.

PROGRAM CODES

The microprocessor used in this model is a multi-purpose type and is used in several different models. To ensure proper operation and the correct features for your particular model, the program codes must be correct.

Note 1. Option Data 1 (Index 02) should be hexadecimal 00.

See Index 02 above. If this program code is wrong the TV will not operate properly.

Note 2. Option Data 2 (Index 03) should be hexadecimal 0F.

See Index 03 above. If this program code is wrong the TV will not operate properly.

POWER FAILURE CIRCUIT

Internal sub_CPU on main IC 5500 is programmed so the set will go to standby mode when there is circuit failure as described below. (Refer to "Block Diagram Power Lines".)

This unit is equipped with a Power Failure Detector function included in the sub_CPU which checks for an abnormal condition in the chassis power supplies.

If, while the power is on, a failure is caused by any of the following that results in a low voltage supply, the sub_CPU will turn the unit off in 1.5 seconds to prevent further damage:

- Failure within the power supply circuits.
- A short circuit in the load side from the supply.

Power Failure: Detected voltage failure for circuit.
(Connected to IC5500 pin 234.)


(Normal: High; Failure: Low)

If, while the power is off, the power is switched on and any of these failures remains uncorrected, the sub_CPU will shut off the power within three seconds.

Check the following if the unit is turned off by the power failure detector.

1. Disconnect the AC power cord (120V AC line) for a short time.
2. Connect a DC Voltmeter to the circuits shown below.
3. Press the Power key and check for the proper voltage supplies.
4. If any of these voltages is low, the power failure detector should turn the unit off within three seconds.
5. Check all circuits shown below.

Note: If power failure is detected 3 times in 15 minutes, the set will enter the standby mode and cannot be switched On. To reset the operating programs of the sub_CPU it is necessary to disconnect the AC cord for a short time.

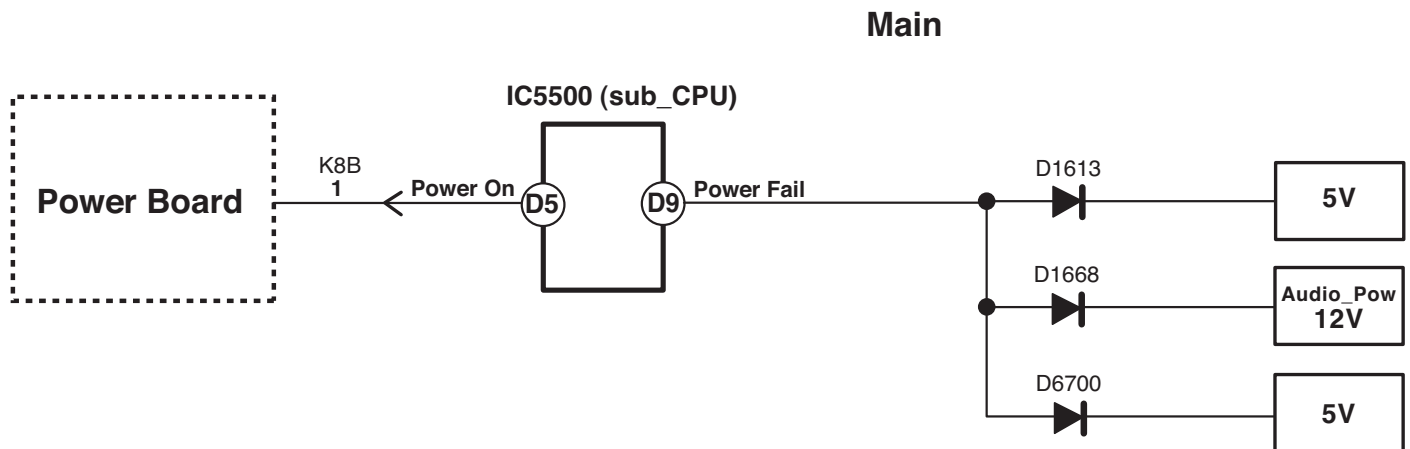

MECHANICAL DISASSEMBLY


CAUTION:

This LCD TV uses several different kinds of screws. Using the correct screw is necessary to prevent damage. Lead wires must be redressed to their previous locations after servicing. The Earth sheet and gasket are provided to prevent interference to other radio and television receivers. The Earth sheet and gasket should be returned to its previous position after servicing.

STAND BASE REMOVAL

Position TV face down on a padded or cushioned surface to protect the screen and finish.

Remove 4 screws (A:6X12) and remove the stand base from the TV.

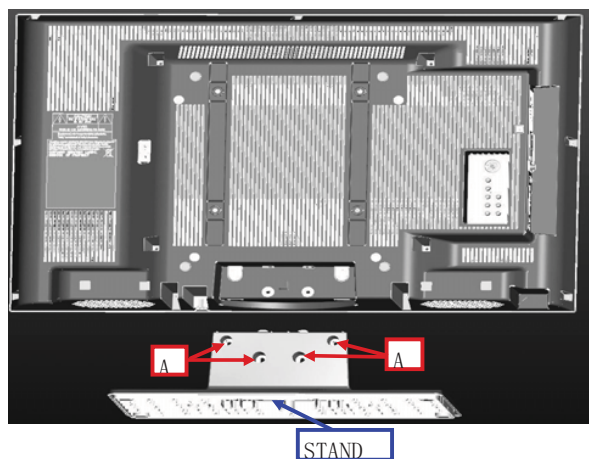



BACK CABINET REMOVAL

- CAUTION -

When the cabinet back is opened without following the procedure, the connector of LVDS and the power board might be damaged.

1. Remove 15 screws to take the back cabinet off.
(B:3x10, 9 pcs.; C:4x8, 4 pcs.; D:3x10, 1pcs.; E:3x6, 1pc.)
2. Detach AC cord from cabinet back.
3. Open the cabinet back from bottom side SLOWLY.
(Distance = 100 mm)
4. Remove panel power cable from Panel.
5. Open cabinet back more from bottom side.
(Distance = 200 mm)
6. Remove LVDS cable from Panel.
7. Detach cabinet back.

NOTE: Board and speaker are installed in cabinet back.

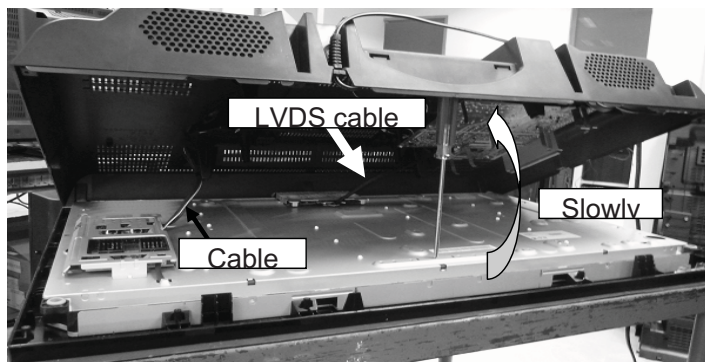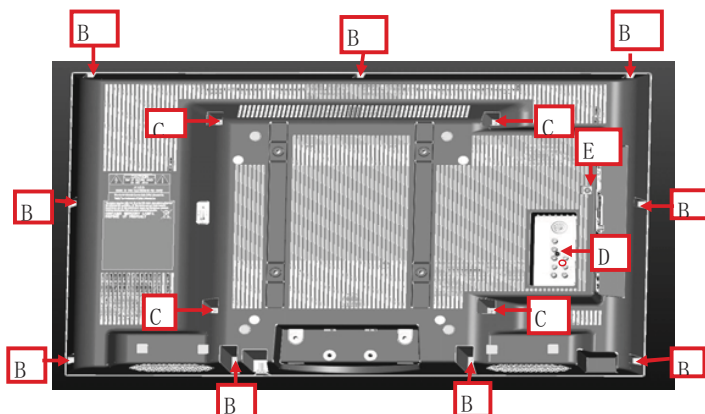


MECHANICAL DISASSEMBLY (Continued)

DEC IND REMOVAL

Remove the dec ind.

LCD PANEL REMOVAL


Lift up the LCD panel from front cabinet.

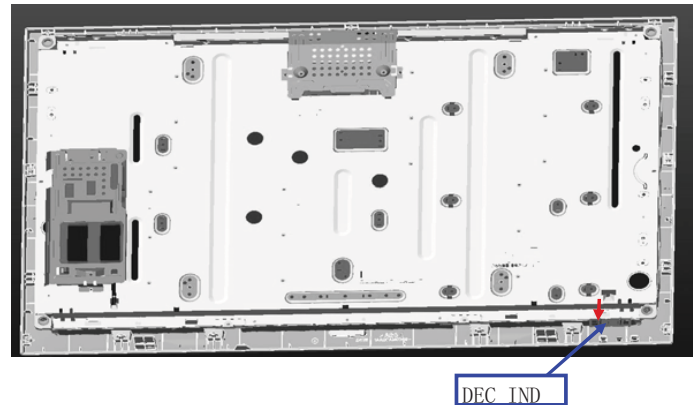

MAIN (DIGITAL) BOARD REMOVAL

Remove 7 screws (B:3x10) to take the main (digital) board off.


ATTENTION – The earth sheet should be returned to its previous position after servicing.

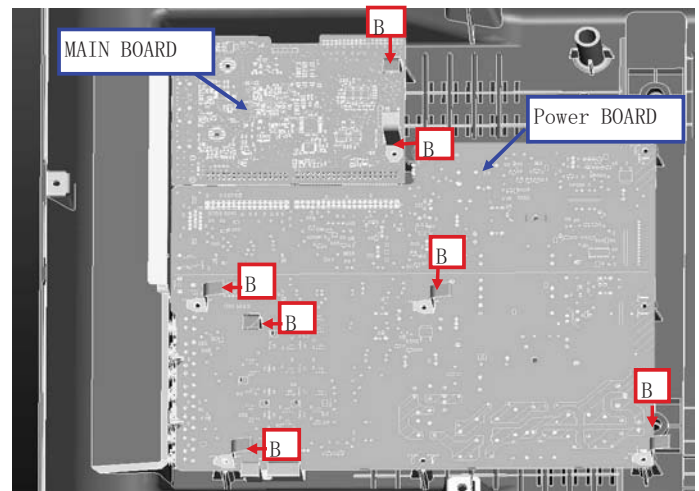

BUTTON UNIT REMOVAL AND RC LED BOARD REMOVAL

Remove 1 screw (B:3x6) to take the button unit and RC LED board off.

ATTENTION – Confirm that mounting wall wire is installed when install the back cabinet.

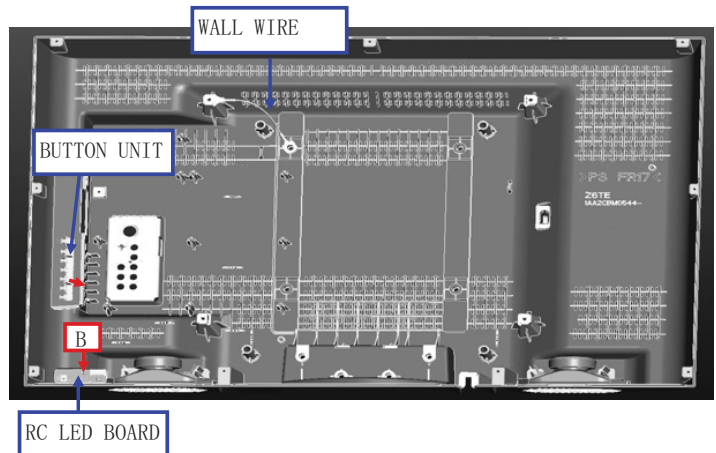


MECHANICAL DISASSEMBLY (Continued)

SPEAKER REMOVAL


No screws.

Take away each speaker from Back Cabinet directly.

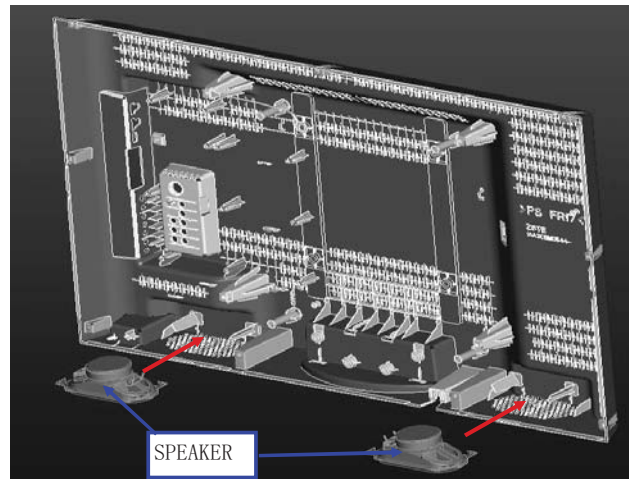

TERMINAL BASE SIDE REMOVAL

Remove 2 screws (E:3x6) and 1 special nut to take the Terminal Base side and terminal base rear off.

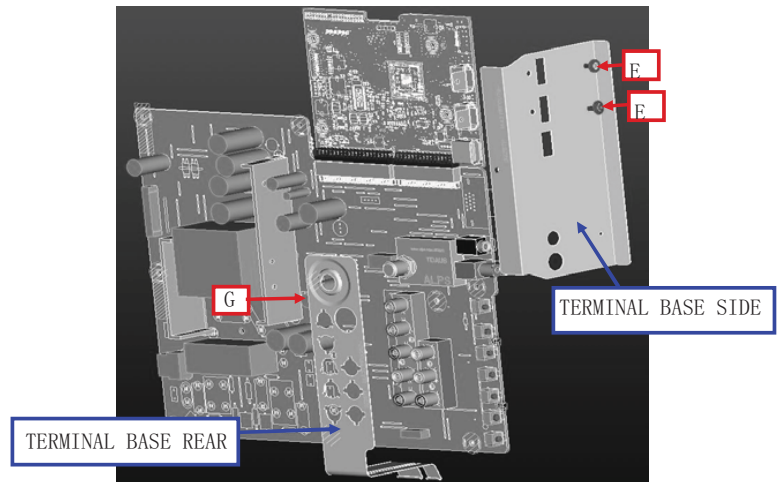

ELECTROSTATICALLY SENSITIVE DEVICES

Many solid-state devices (especially Integrated Circuits) are Electrostatically Sensitive, and, therefore, require special handling techniques as described under "Servicing Electrostatically Sensitive Devices," on page two in this service literature.

CHASSIS ELECTRICAL PARTS LIST

CAUTION: To Protect against electrical shock and for continued product safety, refer to SAFETY PRECAUTIONS and PRODUCT SAFETY NOTICE on Page 2

PRODUCT SAFETY NOTICE

PRODUCT SAFETY SHOULD BE CONSIDERED WHEN A REPLACEMENT IS MADE IN ANY AREA OF A RECEIVER. COMPONENTS INDICATED BY A Δ IN THIS PARTS LIST AND THE SCHEMATIC DIAGRAM DESIGNATE COMPONENTS IN WHICH SAFETY CAN BE OF SPECIAL SIGNIFICANCE. IT IS PARTICULARLY RECOMMENDED THAT ONLY PARTS DESIGNATED ON THE FOLLOWING PARTS LIST BE USED FOR COMPONENT REPLACEMENT DESIGNATED BY A Δ . NO DEVIATIONS FROM RESISTANCE, WATTAGE, AND VOLTAGE RATINGS MAY BE MADE FOR REPLACEMENT ITEMS DESIGNATED BY A Δ .

Note: Schematic part location numbers may not always match with the part descriptions.
The part descriptions are correct and should be used.

Schematic Location	Part No.	Description
--------------------	----------	-------------

CAPACITORS

NOTES:

Read **Description** of the Capacitor as follows:
(Example)

CERAMIC	100P	K	50V
			Rated Voltage
			Tolerance Symbols: Less than 10pF
			A : Not specified B : $\pm 0.1\text{pF}$ C : $\pm 0.25\text{pF}$
			D : $\pm 0.5\text{pF}$ E : $\pm 0.1\text{pF}$ F : $\pm 1\text{pF}$
			G : $\pm 2\text{pF}$ H : $\pm 0.1\text{-}0\text{pF}$ L : $\pm 0.1\text{pF}$
			R : $\pm 0.25\text{-}0\text{pF}$ S : $\pm 0.25\text{-}0\text{pF}$
			More than 10pF
			A : Not specified B : $\pm 0.1\%$ C : $\pm 0.25\%$
			D : $\pm 0.5\%$ F : $\pm 1\%$ G : $\pm 2\%$
			H : $\pm 3\%$ J : $\pm 5\%$ K : $\pm 10\%$
			L : $\pm 15\%$ M : $\pm 20\%$ N : $\pm 30\%$
			P : $\pm 100\text{-}0\%$ Q : $\pm 30\text{-}10\%$ T : $\pm 50\text{-}10\%$
			U : $\pm 75\text{-}10\%$ V : $\pm 20\text{-}10\%$ W : $\pm 100\text{-}10\%$
			X : $\pm 40\text{-}20\%$ Y : $\pm 150\text{-}10\%$ Z : $\pm 80\text{-}20\%$
			Rated value: P=pico tarad, U=micro tarad
			Material:
			CERAMIC Ceramic
			MT-PAPER. Metallized Paper
			POLYESTER Polyester
			MT-POLYEST Metallized Polyester
			POLYPRO Polypropylene
			MT-POLYPRO Metallized Polypropylene
			COMPO FILM Composite Film
			MT-COMPO. Metallized Composite
			STYRENE Styrene
			TA-SOLID Tantalum Solid
			AL-SOLID Aluminum Solid
			ELECT Electrolytic
			NP-ELECT Non-polarised Electrolytic
			OS-SOLID Alluminum Solid with Organic Semiconductive Electrolytic

Schematic Location	Part No.	Description
--------------------	----------	-------------

RESISTORS

NOTES:

Read **Description** of the Resistor as follows:
(Example)

CARBON	4.7K	J	A	1/4W
				Rated Wattage
				Performance Symbols: A...General B..Non-flammable Z...Low noise Other...Temperature coefficient
				Tolerance Symbols:
				A...0.05% B...0.1% C...25%
				D...0.5% F...1% G...2%
				J...5% K...10% M...20%
				P...+5-15%
				Rated value, ohms: K...1,000 M...1,000,000
				Material:
				CARBON Carbon
				MT-FILM Metal Film
				OXIDE-MT. Oxide Metal Film
				SOLID Composition
				MT-GLAZE Metal Glaze
				WIRE WOUND Wire wound
				CERAMIC RES Ceramic
				FUSIBLE RES Fusible

Schematic Location	Part No.	Description
--------------------	----------	-------------

ASSY,PWB,DIGITAL_Z-Z6TF

CAPACITORS

C001	F1H1H102A219	CERAMIC	1000P K	50V
C002	F1H1H102A219	CERAMIC	1000P K	50V
C003	F1J1E105A213	CERAMIC	1U K	25V
C004	F1J1E105A213	CERAMIC	1U K	25V
C005	F1H1H102A219	CERAMIC	1000P K	50V
C006	F1H1H102A219	CERAMIC	1000P K	50V
C007	F1H1H102A219	CERAMIC	1000P K	50V
C008	F1H1H102A219	CERAMIC	1000P K	50V
C009	F1H1H104A913	CERAMIC	0.1U K	50V
C010	F1H1H104A913	CERAMIC	0.1U K	50V
C011	F1H1H104A913	CERAMIC	0.1U K	50V
C012	F1H1H104A913	CERAMIC	0.1U K	50V
C013	F1H1H104A913	CERAMIC	0.1U K	50V
C014	F1H1H104A913	CERAMIC	0.1U K	50V
C015	F1H1H104A913	CERAMIC	0.1U K	50V
C016	F1H1H104A913	CERAMIC	0.1U K	50V
C018	F1H1H331A792	CERAMIC	330P J	50V
C019	F1H1H331A792	CERAMIC	330P J	50V
C020	F1J1E105A213	CERAMIC	1U K	25V
C021	F1H1H104A913	CERAMIC	0.1U K	50V
C022	F1H1H104A913	CERAMIC	0.1U K	50V
C023	F1J1E105A213	CERAMIC	1U K	25V
C024	F1G1C104A077	CERAMIC	0.1U K	16V
C025	F1G1C104A077	CERAMIC	0.1U K	16V
C026	F1G1C104A077	CERAMIC	0.1U K	16V
C027	F1G1C104A077	CERAMIC	0.1U K	16V
C028	F1G1H150A541	CERAMIC	15P J	50V
C029	F1G1H150A541	CERAMIC	15P J	50V
C031	F1G1H681A571	CERAMIC	680P K	50V
C032	F1G1H101A541	CERAMIC	100P J	50V
C033	F1G1H472A571	CERAMIC	4700P K	50V
C034	F1G1C104A077	CERAMIC	0.1U K	16V
C035	F1G1C104A077	CERAMIC	0.1U K	16V
C036	F1J1E105A213	CERAMIC	1U K	25V
C037	F1J1E105A213	CERAMIC	1U K	25V
C038	F1G1C104A077	CERAMIC	0.1U K	16V
C040	F1G1C104A077	CERAMIC	0.1U K	16V
C041	F1G1C104A077	CERAMIC	0.1U K	16V
C042	F1G1C104A077	CERAMIC	0.1U K	16V
C5505	F1J0J106A004	CERAMIC	10U K	6.3V
	F1J0J106A020	CERAMIC	10U K	6.3V
C5506	F1G1H103A706	CERAMIC	0.01U K	50V
C5507	F1H0J4750004	CERAMIC	4.7U K	6.3V
C5508	F1G1C104A077	CERAMIC	0.1U K	16V
C5509	F1J0J106A004	CERAMIC	10U K	6.3V
	F1J0J106A020	CERAMIC	10U K	6.3V
C5510	F1G1C104A077	CERAMIC	0.1U K	16V
C5511	F1G1H1020008	CERAMIC	1000P K	50V
C5512	F1G1C104A077	CERAMIC	0.1U K	16V
C5513	F1G1C104A077	CERAMIC	0.1U K	16V
C5514	F1G1H1020008	CERAMIC	1000P K	50V

Schematic Location	Part No.	Description
--------------------	----------	-------------

C5515	F1G1H1020008	CERAMIC	1000P K	50V
C5516	F1G1H103A706	CERAMIC	0.01U K	50V
C5517	F1G1H221A737	CERAMIC	220P J	50V
C5518	F1G1C104A077	CERAMIC	0.1U K	16V
C5519	F1G1H103A706	CERAMIC	0.01U K	50V
C5520	F1G1C104A077	CERAMIC	0.1U K	16V
C5522	F1G1H390A541	CERAMIC	39P J	50V
C5523	F1J0J106A004	CERAMIC	10U K	6.3V
	F1J0J106A020	CERAMIC	10U K	6.3V
C5525	F1G1H221A737	CERAMIC	220P J	50V
C5527	F1G1H103A706	CERAMIC	0.01U K	50V
C5528	F1G1C104A077	CERAMIC	0.1U K	16V
C5531	F1G1C104A077	CERAMIC	0.1U K	16V
C5532	F1J0J106A004	CERAMIC	10U K	6.3V
	F1J0J106A020	CERAMIC	10U K	6.3V
C5533	F1G1C104A077	CERAMIC	0.1U K	16V
C5534	F1G1H103A706	CERAMIC	0.01U K	50V
C5535	F1G1H1020008	CERAMIC	1000P K	50V
C5536	F1G1H221A737	CERAMIC	220P J	50V
C5537	F1J0J106A004	CERAMIC	10U K	6.3V
	F1J0J106A020	CERAMIC	10U K	6.3V
C5538	F1G1H1020008	CERAMIC	1000P K	50V
C5539	F1G1H103A706	CERAMIC	0.01U K	50V
C5540	F1G1H1020008	CERAMIC	1000P K	50V
C5541	F1G1H103A706	CERAMIC	0.01U K	50V
C5542	F1J0J106A004	CERAMIC	10U K	6.3V
	F1J0J106A020	CERAMIC	10U K	6.3V
C5543	F1G1H103A706	CERAMIC	0.01U K	50V
C5544	F1G1A105A047	CERAMIC	1U K	10V
C5546	F1G1C104A077	CERAMIC	0.1U K	16V
C5547	F1G1H392A571	CERAMIC	3900P K	50V
C5549	F1G1C104A077	CERAMIC	0.1U K	16V
C5550	F1G1H103A706	CERAMIC	0.01U K	50V
C5551	F1G1H1020008	CERAMIC	1000P K	50V
C5552	F1G1C104A077	CERAMIC	0.1U K	16V
C5553	F1G1H103A706	CERAMIC	0.01U K	50V
C5554	F1J0J106A004	CERAMIC	10U K	6.3V
	F1J0J106A020	CERAMIC	10U K	6.3V
C5555	F1G1C104A077	CERAMIC	0.1U K	16V
C5556	F1J0J106A004	CERAMIC	10U K	6.3V
	F1J0J106A020	CERAMIC	10U K	6.3V
C5557	F1G1A105A047	CERAMIC	1U K	10V
C5558	F1G1H1020008	CERAMIC	1000P K	50V
C5559	F1G1H1020008	CERAMIC	1000P K	50V
C5560	F1G1A105A047	CERAMIC	1U K	10V
C5561	F1G1H1020008	CERAMIC	1000P K	50V
C5562	F1G1C104A077	CERAMIC	0.1U K	16V
C5563	F1G1C104A077	CERAMIC	0.1U K	16V
C5565	F1J0J106A004	CERAMIC	10U K	6.3V
	F1J0J106A020	CERAMIC	10U K	6.3V
C5566	F1G1A105A047	CERAMIC	1U K	10V
C5567	F1H0J4750004	CERAMIC	4.7U K	6.3V
C5568	F1G1H1020008	CERAMIC	1000P K	50V
C5569	F1G1C104A077	CERAMIC	0.1U K	16V

Schematic Location	Part No.	Description
C5570	F1J0J106A004	CERAMIC 10U K 6.3V
	F1J0J106A020	CERAMIC 10U K 6.3V
C5571	F1G1C104A077	CERAMIC 0.1U K 16V
C5572	F1G1A105A047	CERAMIC 1U K 10V
C5574	F1G1A105A047	CERAMIC 1U K 10V
C5575	F1G1A105A047	CERAMIC 1U K 10V
C5576	F1G1A105A047	CERAMIC 1U K 10V
C5577	F1G1A105A047	CERAMIC 1U K 10V
C5578	F1G1A105A047	CERAMIC 1U K 10V
C5579	F1G1A105A047	CERAMIC 1U K 10V
C5580	F1G1A105A047	CERAMIC 1U K 10V
C5581	F1G1E473A091	CERAMIC 0.047U K 25V
C5583	F1G1E473A091	CERAMIC 0.047U K 25V
C5585	F1G1H103A706	CERAMIC 0.01U K 50V
C5586	F1G1E473A091	CERAMIC 0.047U K 25V
C5588	F1G1E473A091	CERAMIC 0.047U K 25V
C5590	F1G1E473A091	CERAMIC 0.047U K 25V
C5592	F1G1C104A077	CERAMIC 0.1U K 16V
C5593	F1G1E473A091	CERAMIC 0.047U K 25V
C5595	F1G1E473A091	CERAMIC 0.047U K 25V
C5597	F1G1H103A706	CERAMIC 0.01U K 50V
C5598	F1G1E473A091	CERAMIC 0.047U K 25V
C5600	F1G1E473A091	CERAMIC 0.047U K 25V
C5602	F1G1E473A091	CERAMIC 0.047U K 25V
C5605	F1G1H220A541	CERAMIC 22P J 50V
C5606	F1G1H390A541	CERAMIC 39P J 50V
C5608	F1G1H220A541	CERAMIC 22P J 50V
C5613	F1H1H1200004	CERAMIC 12P J 50V
C5614	F1H1H1200004	CERAMIC 12P J 50V
C5615	F1G1C104A077	CERAMIC 0.1U K 16V
C5616	F1G1C104A077	CERAMIC 0.1U K 16V
C5618	F1G1C104A077	CERAMIC 0.1U K 16V
C5619	F1G1H150A541	CERAMIC 15P J 50V
C5620	F1G1H150A541	CERAMIC 15P J 50V
C5650	F1J0J106A004	CERAMIC 10U K 6.3V
	F1J0J106A020	CERAMIC 10U K 6.3V
C5653	F1G1C104A077	CERAMIC 0.1U K 16V
C5661	F1G1C104A077	CERAMIC 0.1U K 16V
C5700	F1G1A105A047	CERAMIC 1U K 10V
C5701	F1G1C104A077	CERAMIC 0.1U K 16V
C5702	F1G1A105A047	CERAMIC 1U K 10V
C5703	F1G1C104A077	CERAMIC 0.1U K 16V
C5704	F1G1C104A077	CERAMIC 0.1U K 16V
C5705	F1G1C104A077	CERAMIC 0.1U K 16V
C5707	F1G1C104A077	CERAMIC 0.1U K 16V
C5708	F1G1C104A077	CERAMIC 0.1U K 16V
C5709	F1G1C104A077	CERAMIC 0.1U K 16V
C5711	F1G1C104A077	CERAMIC 0.1U K 16V
C5712	F1G1C104A077	CERAMIC 0.1U K 16V
C5713	F1G1C104A077	CERAMIC 0.1U K 16V
C5714	F1J0J106A004	CERAMIC 10U K 6.3V
	F1J0J106A020	CERAMIC 10U K 6.3V
C5715	F1J0J106A004	CERAMIC 10U K 6.3V
	F1J0J106A020	CERAMIC 10U K 6.3V

Schematic Location	Part No.	Description
C5750	F1G1A105A047	CERAMIC 1U K 10V
C5902	F1G1C104A077	CERAMIC 0.1U K 16V
C5903	F1G1A684A047	CERAMIC 0.68U K 10V
C5905	F1G1C104A077	CERAMIC 0.1U K 16V
C6330	F1G1C104A077	CERAMIC 0.1U K 16V
C6530	F1G1C104A077	CERAMIC 0.1U K 16V
C6531	F1G1C104A077	CERAMIC 0.1U K 16V
C6560	F1G1C104A077	CERAMIC 0.1U K 16V
C6561	F1G1C104A077	CERAMIC 0.1U K 16V
C6600	F1G1A105A047	CERAMIC 1U K 10V
C6601	F1G1A105A047	CERAMIC 1U K 10V
C6701	F1G1C104A077	CERAMIC 0.1U K 16V
C6702	F1G1C104A077	CERAMIC 0.1U K 16V
C6703	F1J0J106A004	CERAMIC 10U K 6.3V
	F1J0J106A020	CERAMIC 10U K 6.3V
C6706	F1G1C104A077	CERAMIC 0.1U K 16V
C6707	F2G1C471A066	ELECT 470U M 16V
C6708	F1G1A2240008	CERAMIC 0.22U K 10V
C6720	F1H0J4750004	CERAMIC 4.7U K 6.3V
C6721	F1G1C104A077	CERAMIC 0.1U K 16V
C6722	F1G1C104A077	CERAMIC 0.1U K 16V
C6723	F1G1A105A047	CERAMIC 1U K 10V
C6724	F1G1H392A571	CERAMIC 3900P K 50V
C6727	F2G1C471A066	ELECT 470U M 16V
C6728	F1G1H103A706	CERAMIC 0.01U K 50V
C6729	F1G1C104A077	CERAMIC 0.1U K 16V
C6730	F1G1H221A737	CERAMIC 220P J 50V
C6733	F1G1A105A047	CERAMIC 1U K 10V
C6740	F1G1A2240008	CERAMIC 0.22U K 10V
C6741	F1G1C104A077	CERAMIC 0.1U K 16V
C6742	F1G1C104A077	CERAMIC 0.1U K 16V
C6743	F2G1C221A066	ELECT 220U M 16V
C6752	F1G1E473A091	CERAMIC 0.047U K 25V
C6753	F1G1A105A047	CERAMIC 1U K 10V
C6754	F1G1A105A047	CERAMIC 1U K 10V
DIODES		
D002	B0ACCK000019	DIODE 1SS355
	B0ACDJ000007	DIODE 1SS352-(TPH3)
	B0ACDJ000017	DIODE 1SS352(TH3 F T)
	DDDA2J10100LG	DIODE DA2J10100L
D003	B0ACCK000019	DIODE 1SS355
	B0ACDJ000007	DIODE 1SS352-(TPH3)
	B0ACDJ000017	DIODE 1SS352(TH3 F T)
	DDDA2J10100LG	DIODE DA2J10100L
D007	B0BC6R100010	ZD UDZS-TE-176.2B
	B0BC6R2A0384	ZENER DIODE MM3Z6V2B
	DZDZ2J062M0LG	ZD DIODE DZ2J062M0L
D008	B0BC6R100010	ZD UDZS-TE-176.2B
	B0BC6R2A0384	ZENER DIODE MM3Z6V2B
	DZDZ2J062M0LG	ZD DIODE DZ2J062M0L
D6700	B0ACCK000019	DIODE 1SS355
	B0ACDJ000007	DIODE 1SS352-(TPH3)

Schematic Location	Part No.	Description
	B0ACDJ000017	DIODE 1SS352(TH3 F T)
	DDDA2J10100LG	DIODE DA2J10100L
INTEGRATED CIRCUITS		
IC001	C1AB00003628	IC STA333W13TR
IC5500	C1AB00003956	IC ZR39748HGC
IC5700	C3ABSY000102	IC H5PS5162GFR-S6C
IC5750	QXXAAJQ1461—	IC S25FL064P0XMF1000-Z6SE
IC5900	C0EBY0001079	IC XC6118N28AMR-G
IC6530	C0JBAA000345	"IC TC7SET08FU(T5L,JF)"
	C0JBAA000502	"IC TC7SET08FU(5L,JF,T"
	C0JBAA000505	IC 74AHCT1G08GW
	C0JBAA000345	"IC TC7SET08FU(T5L,JF)"
IC6560	C0JBAA000502	"IC TC7SET08FU(5L,JF,T"
	C0JBAA000505	IC 74AHCT1G08GW
	C0DBZY00485	IC NCP380HSN05AAT1G
IC6600	C0CBAYG00009	IC LM1117S-ADJ
IC6720	C0DBAYY01122	IC BD9328EFJ-E2
IC6750	C0DBGYY02242	IC AP2128K-ADJTRG1
COILS		
L001	G1C220MA0445	"INDUCTOR ,22UH"
L002	G1C220MA0445	"INDUCTOR ,22UH"
L003	G1C220MA0445	"INDUCTOR ,22UH"
L009	J0JCC0000371	"INDUCTOR , 120 OHM"
L011	J0JYC0000381	"INDUCTOR , 220 OHM"
L012	J0JYC0000381	"INDUCTOR , 220 OHM"
L013	G1C220MA0445	"INDUCTOR ,22UH"
L017	J0JCC0000371	"INDUCTOR , 120 OHM"
L5500	J0JCC0000371	"INDUCTOR , 120 OHM"
L5501	J0JCC0000371	"INDUCTOR , 120 OHM"
L5502	J0JCC0000371	"INDUCTOR , 120 OHM"
L5503	J0JYC0000381	"INDUCTOR , 220 OHM"
L5504	J0JYC0000381	"INDUCTOR , 220 OHM"
L5505	J0JCC0000371	"INDUCTOR , 120 OHM"
L5506	J0JCC0000371	"INDUCTOR , 120 OHM"
L5507	J0JCC0000371	"INDUCTOR , 120 OHM"
L5508	J0JCC0000371	"INDUCTOR , 120 OHM"
L5509	J0JCC0000371	"INDUCTOR , 120 OHM"
L5510	J0JCC0000371	"INDUCTOR , 120 OHM"
L5511	J0JCC0000371	"INDUCTOR , 120 OHM"
L5512	D0GB750JA041	MT-GLAZE 75 JA 1/10W
	D0GB750JA072	MT-GLAZE 75 JA 1/10W
	D0GB750JA089	MT-GLAZE 75 JA 1/10W
L5513	J0JCC0000371	"INDUCTOR , 120 OHM"
L5514	J0JCC0000371	"INDUCTOR , 120 OHM"
L5515	J0JCC0000371	"INDUCTOR , 120 OHM"
L5516	G1CR22JA0135	"INDUCTOR ,0.22UH"
L6301	D0GDR00JA072	MT-GLAZE 0.000 ZA 1/10W
	D0GDR00Z0002	MT-GLAZE 0.000 ZA 1/10W
L6308	D0GDR00JA072	MT-GLAZE 0.000 ZA 1/10W
	D0GDR00Z0002	MT-GLAZE 0.000 ZA 1/10W
L6313	D1HYR004A012	R-NETWORK 0X4 0.063W
L6314	D1HYR004A012	R-NETWORK 0X4 0.063W
L6315	D1HYR004A012	R-NETWORK 0X4 0.063W

Schematic Location	Part No.	Description
L6720	G1C220MA0445	"INDUCTOR ,22UH"
L6721	D0GDR00JA072	MT-GLAZE 0.000 ZA 1/10W
	D0GDR00Z0002	MT-GLAZE 0.000 ZA 1/10W
L6722	D0GDR00JA072	MT-GLAZE 0.000 ZA 1/10W
	D0GDR00Z0002	MT-GLAZE 0.000 ZA 1/10W
TRANSISTORS		
Q6329	B1CHPD000006	TR CPH3338-T-TL-E
	B1DHDD000041	TR A03407A
Q6331	B1ABCE000028	TR MMBTSC3928R
	B1ABDF000013	TR 2SC3928A1R
	B1ABDF000024	TR 2SC3928A1S
Q6700	B1ABCE000028	TR MMBTSC3928R
	B1ABDF000013	TR 2SC3928A1R
	B1ABDF000024	TR 2SC3928A1S
	B1ABDF000024	TR 2SC3928A1S
Q6701	B1CHPD000006	TR CPH3338-T-TL-E
	B1DHDD000041	TR A03407A
Q6720	B1ABCE000028	TR MMBTSC3928R
	B1ABDF000013	TR 2SC3928A1R
	B1ABDF000024	TR 2SC3928A1S
	B1ABDF000024	TR 2SC3928A1S
Q6721	B1ABCE000028	TR MMBTSC3928R
	B1ABDF000013	TR 2SC3928A1R
	B1ABDF000024	TR 2SC3928A1S
Q6730	B1CFRC000023	TR MCH6437-P-TL-E
Q6740	B1ABCE000028	TR MMBTSC3928R
	B1ABDF000013	TR 2SC3928A1R
	B1ABDF000024	TR 2SC3928A1S
	B1ABDF000024	TR 2SC3928A1S
Q6741	B1ABCE000028	TR MMBTSC3928R
	B1ABDF000013	TR 2SC3928A1R
	B1ABDF000024	TR 2SC3928A1S
	B1ABDF000024	TR 2SC3928A1S
Q6742	B1CFRC000023	TR MCH6437-P-TL-E
	B1CFRC000023	TR MCH6437-P-TL-E
RESISTORS		
R001	D0GB5R6JA040	MT-GLAZE 5.6 JA 1/10W
	D0GB5R6JA072	MT-GLAZE 5.6 JA 1/10W
R002	D0GB5R6JA040	MT-GLAZE 5.6 JA 1/10W
	D0GB5R6JA072	MT-GLAZE 5.6 JA 1/10W
	D0GB5R6JA090	MT-GLAZE 5.6 JA 1/10W
	D0GB5R6JA090	MT-GLAZE 5.6 JA 1/10W
R003	D0GB5R6JA040	MT-GLAZE 5.6 JA 1/10W
	D0GB5R6JA072	MT-GLAZE 5.6 JA 1/10W
	D0GB5R6JA090	MT-GLAZE 5.6 JA 1/10W
	D0GB5R6JA090	MT-GLAZE 5.6 JA 1/10W
R004	D0GB5R6JA040	MT-GLAZE 5.6 JA 1/10W
	D0GB5R6JA072	MT-GLAZE 5.6 JA 1/10W
	D0GB5R6JA090	MT-GLAZE 5.6 JA 1/10W
	D0GB5R6JA090	MT-GLAZE 5.6 JA 1/10W
R005	D0GB470J0002	MT-GLAZE 47 JA 1/10W
	D0GB470JA041	MT-GLAZE 47 JA 1/10W
	D0GB470JA089	MT-GLAZE 47 JA 1/10W
R006	D0GB470J0002	MT-GLAZE 47 JA 1/10W
	D0GB470JA041	MT-GLAZE 47 JA 1/10W
	D0GB470JA089	MT-GLAZE 47 JA 1/10W
	D0GB470JA089	MT-GLAZE 47 JA 1/10W
R007	J0JCC0000371	"INDUCTOR, 120 OHM"
R008	J0JCC0000371	"INDUCTOR, 120 OHM"
R009	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W

Schematic Location	Part No.	Description
R010	D0GB103JA089	MT-GLAZE 10K JA 1/10W
	D0GB101JA041	MT-GLAZE 100 JA 1/10W
	D0GB101JA069	MT-GLAZE 100 JA 1/10W
R012	D0GB101JA089	MT-GLAZE 100 JA 1/10W
	D0GB101JA041	MT-GLAZE 100 JA 1/10W
	D0GB101JA069	MT-GLAZE 100 JA 1/10W
R013	D0GB101JA089	MT-GLAZE 100 JA 1/10W
	D0GB101JA041	MT-GLAZE 100 JA 1/10W
	D0GB101JA069	MT-GLAZE 100 JA 1/10W
R015	D0GB222JA041	MT-GLAZE 2.2K JA 1/10W
	D0GB222JA072	MT-GLAZE 2.2K JA 1/10W
	D0GB222JA089	MT-GLAZE 2.2K JA 1/10W
R019	D0GB222JA041	MT-GLAZE 2.2K JA 1/10W
	D0GB222JA072	MT-GLAZE 2.2K JA 1/10W
	D0GB222JA089	MT-GLAZE 2.2K JA 1/10W
R022	D0GB470J0002	MT-GLAZE 47 JA 1/10W
	D0GB470JA041	MT-GLAZE 47 JA 1/10W
	D0GB470JA089	MT-GLAZE 47 JA 1/10W
R023	D0GB470J0002	MT-GLAZE 47 JA 1/10W
	D0GB470JA041	MT-GLAZE 47 JA 1/10W
	D0GB470JA089	MT-GLAZE 47 JA 1/10W
R5500	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R5501	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R5502	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R5503	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R5504	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R5505	D0GB123ZA038	MT-GLAZE 12K FA 1/10W
	D0GB123ZA068	MT-GLAZE 12K FA 1/10W
	D1BB1202A055	MT-GLAZE 12K FA 1/10W
R5506	D0GB821ZA037	MT-GLAZE 820 FA 1/10W
	D0GB821ZA068	MT-GLAZE 820 FA 1/10W
	D1BB8200A055	MT-GLAZE 820 FA 1/10W
R5507	D0GB102JA041	MT-GLAZE 1K JA 1/10W
	D0GB102JA071	MT-GLAZE 1K JA 1/10W
	D0GB102JA089	MT-GLAZE 1K JA 1/10W
R5508	D0GB123ZA038	MT-GLAZE 12K FA 1/10W
	D0GB123ZA068	MT-GLAZE 12K FA 1/10W
	D1BB1202A055	MT-GLAZE 12K FA 1/10W
R5509	D0GB472ZA038	MT-GLAZE 4.7K FA 1/10W
	D0GB472ZA068	MT-GLAZE 4.7K FA 1/10W
	D1BB4701A055	MT-GLAZE 4.7K FA 1/10W
R5510	D0GB472ZA038	MT-GLAZE 4.7K FA 1/10W
	D0GB472ZA068	MT-GLAZE 4.7K FA 1/10W
	D1BB4701A055	MT-GLAZE 4.7K FA 1/10W
R5513	D0GB820JA041	MT-GLAZE 82 JA 1/10W
	D0GB820JA072	MT-GLAZE 82 JA 1/10W

Schematic Location	Part No.	Description
R5514	D0GB820JA089	MT-GLAZE 82 JA 1/10W
	D0GB100JA041	MT-GLAZE 10 JA 1/10W
	D0GB100JA072	MT-GLAZE 10 JA 1/10W
R5516	D0GB100JA089	MT-GLAZE 10 JA 1/10W
	D0GB101JA041	MT-GLAZE 100 JA 1/10W
	D0GB101JA069	MT-GLAZE 100 JA 1/10W
R5517	D0GB101JA089	MT-GLAZE 100 JA 1/10W
	D0GB101JA041	MT-GLAZE 100 JA 1/10W
	D0GB101JA069	MT-GLAZE 100 JA 1/10W
R5518	D0GB101JA089	MT-GLAZE 100 JA 1/10W
	D0GB101JA041	MT-GLAZE 100 JA 1/10W
	D0GB101JA069	MT-GLAZE 100 JA 1/10W
R5519	D0GB101JA089	MT-GLAZE 100 JA 1/10W
	D0GB101JA041	MT-GLAZE 100 JA 1/10W
	D0GB101JA069	MT-GLAZE 100 JA 1/10W
R5520	D0GB101JA089	MT-GLAZE 100 JA 1/10W
	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R5522	D0GB102JA041	MT-GLAZE 1K JA 1/10W
	D0GB102JA071	MT-GLAZE 1K JA 1/10W
	D0GB102JA089	MT-GLAZE 1K JA 1/10W
R5523	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R5524	D0GB391ZA037	MT-GLAZE 390 FA 1/10W
	D0GB391ZA068	MT-GLAZE 390 FA 1/10W
	D1BB3900A055	MT-GLAZE 390 FA 1/10W
R5525	D0GB472JA041	MT-GLAZE 4.7K JA 1/10W
	D0GB472JA072	MT-GLAZE 4.7K JA 1/10W
	D0GB472JA089	MT-GLAZE 4.7K JA 1/10W
R5526	D0GB472JA041	MT-GLAZE 4.7K JA 1/10W
	D0GB472JA072	MT-GLAZE 4.7K JA 1/10W
	D0GB472JA089	MT-GLAZE 4.7K JA 1/10W
R5527	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R5528	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R5529	D0GB333JA041	MT-GLAZE 33K JA 1/10W
	D0GB333JA070	MT-GLAZE 33K JA 1/10W
	D0GB333JA089	MT-GLAZE 33K JA 1/10W
R5530	D0GB273JA041	MT-GLAZE 27K JA 1/10W
	D0GB273JA072	MT-GLAZE 27K JA 1/10W
	D0GB273JA089	MT-GLAZE 27K JA 1/10W
R5531	D0GB333JA041	MT-GLAZE 33K JA 1/10W
	D0GB333JA070	MT-GLAZE 33K JA 1/10W
	D0GB333JA089	MT-GLAZE 33K JA 1/10W
R5532	D0GB273JA041	MT-GLAZE 27K JA 1/10W
	D0GB273JA072	MT-GLAZE 27K JA 1/10W
	D0GB273JA089	MT-GLAZE 27K JA 1/10W
R5533	D0GB333JA041	MT-GLAZE 33K JA 1/10W
	D0GB333JA070	MT-GLAZE 33K JA 1/10W
	D0GB333JA089	MT-GLAZE 33K JA 1/10W
R5535	D0GB333JA041	MT-GLAZE 33K JA 1/10W
	D0GB333JA070	MT-GLAZE 33K JA 1/10W

Schematic Location	Part No.	Description
R5577	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R5578	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
R5579	D0GB103JA089	MT-GLAZE 10K JA 1/10W
	D0GB103JA041	MT-GLAZE 10K JA 1/10W
R5581	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R5582	D0GB222JA041	MT-GLAZE 2.2K JA 1/10W
	D0GB222JA072	MT-GLAZE 2.2K JA 1/10W
R5583	D0GB222JA089	MT-GLAZE 2.2K JA 1/10W
	D0GB101JA041	MT-GLAZE 100 JA 1/10W
R5584	D0GB101JA069	MT-GLAZE 100 JA 1/10W
	D0GB101JA089	MT-GLAZE 100 JA 1/10W
R5585	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R5586	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R5587	D0GB102JA041	MT-GLAZE 1K JA 1/10W
	D0GB102JA071	MT-GLAZE 1K JA 1/10W
R5588	D0GB102JA089	MT-GLAZE 1K JA 1/10W
	D0GB102JA041	MT-GLAZE 1K JA 1/10W
R5589	D0GB102JA071	MT-GLAZE 1K JA 1/10W
	D0GB102JA089	MT-GLAZE 1K JA 1/10W
R5591	D0GB472JA041	MT-GLAZE 4.7K JA 1/10W
	D0GB472JA072	MT-GLAZE 4.7K JA 1/10W
R5592	D0GB472JA089	MT-GLAZE 4.7K JA 1/10W
	D0GB472JA041	MT-GLAZE 4.7K JA 1/10W
R5593	D0GB472JA072	MT-GLAZE 4.7K JA 1/10W
	D0GB103JA041	MT-GLAZE 10K JA 1/10W
R5594	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R5598	D0GB101JA041	MT-GLAZE 100 JA 1/10W
	D0GB101JA069	MT-GLAZE 100 JA 1/10W
R5599	D0GB101JA089	MT-GLAZE 100 JA 1/10W
	D0GB103JA041	MT-GLAZE 10K JA 1/10W
R5603	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R5650	D0GB101JA041	MT-GLAZE 100 JA 1/10W
	D0GB101JA069	MT-GLAZE 100 JA 1/10W
	D0GB101JA089	MT-GLAZE 100 JA 1/10W
	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W

Schematic Location	Part No.	Description
R5660	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
	D0GB101JA041	MT-GLAZE 100 JA 1/10W
R5700	D0GB101JA069	MT-GLAZE 100 JA 1/10W
	D0GB101JA089	MT-GLAZE 100 JA 1/10W
R5701	D0GB101ZA037	MT-GLAZE 100 FA 1/10W
	D0GB101ZA068	MT-GLAZE 100 FA 1/10W
R5702	D1BB1000A055	MT-GLAZE 100 FA 1/10W
	D0GB101JA041	MT-GLAZE 100 JA 1/10W
R5750	D0GB101JA069	MT-GLAZE 100 JA 1/10W
	D0GB101JA089	MT-GLAZE 100 JA 1/10W
R5751	D0GB101ZA037	MT-GLAZE 100 FA 1/10W
	D0GB101ZA068	MT-GLAZE 100 FA 1/10W
R5753	D1BB1000A055	MT-GLAZE 100 FA 1/10W
	D0GB103JA041	MT-GLAZE 10K JA 1/10W
R5900	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R5901	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
R5902	D0GB103JA089	MT-GLAZE 10K JA 1/10W
	D0GB103JA041	MT-GLAZE 10K JA 1/10W
R5903	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R5908	D0GB101JA041	MT-GLAZE 100 JA 1/10W
	D0GB101JA069	MT-GLAZE 100 JA 1/10W
R5950	D0GB101JA089	MT-GLAZE 100 JA 1/10W
	D0GB101JA041	MT-GLAZE 100 JA 1/10W
R5952	D0GB101JA069	MT-GLAZE 100 JA 1/10W
	D0GB101JA089	MT-GLAZE 100 JA 1/10W
R5954	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
R5955	D0GB103JA089	MT-GLAZE 10K JA 1/10W
	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
R5956	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
R5957	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
	D0GB103JA041	MT-GLAZE 10K JA 1/10W
R6314	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R6317	D0GB102JA041	MT-GLAZE 1K JA 1/10W
	D0GB102JA071	MT-GLAZE 1K JA 1/10W
	D0GB102JA089	MT-GLAZE 1K JA 1/10W
	D0GB102JA041	MT-GLAZE 1K JA 1/10W
	D0GB102JA071	MT-GLAZE 1K JA 1/10W
	D0GB102JA089	MT-GLAZE 1K JA 1/10W
	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
	D0GB102JA041	MT-GLAZE 1K JA 1/10W
	D0GB102JA071	MT-GLAZE 1K JA 1/10W
	D0GB102JA089	MT-GLAZE 1K JA 1/10W
	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W

Schematic Location	Part No.	Description
R6318	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R6321	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R6322	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R6323	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R6324	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R6337	D0GB105JA041	MT-GLAZE 1M JA 1/10W
	D0GB105JA071	MT-GLAZE 1M JA 1/10W
	D0GB105JA089	MT-GLAZE 1M JA 1/10W
R6339	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R6340	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R6342	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R6348	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R6502	D0GB102JA041	MT-GLAZE 1K JA 1/10W
	D0GB102JA071	MT-GLAZE 1K JA 1/10W
	D0GB102JA089	MT-GLAZE 1K JA 1/10W
R6515	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R6518	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R6530	D0GB473JA041	MT-GLAZE 47K JA 1/10W
	D0GB473JA072	MT-GLAZE 47K JA 1/10W
	D0GB473JA089	MT-GLAZE 47K JA 1/10W
R6531	D0GB473JA041	MT-GLAZE 47K JA 1/10W
	D0GB473JA072	MT-GLAZE 47K JA 1/10W
	D0GB473JA089	MT-GLAZE 47K JA 1/10W
R6532	D0GB102JA041	MT-GLAZE 1K JA 1/10W
	D0GB102JA071	MT-GLAZE 1K JA 1/10W
	D0GB102JA089	MT-GLAZE 1K JA 1/10W
R6533	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R6534	D0GB470J0002	MT-GLAZE 47 JA 1/10W
	D0GB470JA041	MT-GLAZE 47 JA 1/10W
	D0GB470JA089	MT-GLAZE 47 JA 1/10W
R6535	D0GB470J0002	MT-GLAZE 47 JA 1/10W
	D0GB470JA041	MT-GLAZE 47 JA 1/10W
	D0GB470JA089	MT-GLAZE 47 JA 1/10W
R6536	D0GB102JA041	MT-GLAZE 1K JA 1/10W
	D0GB102JA071	MT-GLAZE 1K JA 1/10W

Schematic Location	Part No.	Description
R6546	D0GB102JA089	MT-GLAZE 1K JA 1/10W
	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
R6547	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
R6549	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
	D0GB223JA041	MT-GLAZE 22K JA 1/10W
	D0GB223JA070	MT-GLAZE 22K JA 1/10W
R6550	D0GB223JA089	MT-GLAZE 22K JA 1/10W
	D0GB470J0002	MT-GLAZE 47 JA 1/10W
	D0GB470JA041	MT-GLAZE 47 JA 1/10W
R6560	D0GB470JA089	MT-GLAZE 47 JA 1/10W
	D0GB473JA041	MT-GLAZE 47K JA 1/10W
	D0GB473JA072	MT-GLAZE 47K JA 1/10W
R6561	D0GB473JA089	MT-GLAZE 47K JA 1/10W
	D0GB473JA041	MT-GLAZE 47K JA 1/10W
	D0GB473JA072	MT-GLAZE 47K JA 1/10W
R6562	D0GB473JA089	MT-GLAZE 47K JA 1/10W
	D0GB102JA041	MT-GLAZE 1K JA 1/10W
	D0GB102JA071	MT-GLAZE 1K JA 1/10W
R6563	D0GB102JA089	MT-GLAZE 1K JA 1/10W
	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
R6564	D0GB103JA089	MT-GLAZE 10K JA 1/10W
	D0GB470J0002	MT-GLAZE 47 JA 1/10W
	D0GB470JA041	MT-GLAZE 47 JA 1/10W
R6565	D0GB470JA089	MT-GLAZE 47 JA 1/10W
	D0GB470J0002	MT-GLAZE 47 JA 1/10W
	D0GB470JA041	MT-GLAZE 47 JA 1/10W
R6566	D0GB470JA089	MT-GLAZE 47 JA 1/10W
	D0GB102JA041	MT-GLAZE 1K JA 1/10W
	D0GB102JA071	MT-GLAZE 1K JA 1/10W
R6576	D0GB102JA089	MT-GLAZE 1K JA 1/10W
	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R6577	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
R6579	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
	D0GB470J0002	MT-GLAZE 47 JA 1/10W
	D0GB470JA041	MT-GLAZE 47 JA 1/10W
R6582	D0GB470JA089	MT-GLAZE 47 JA 1/10W
	D0GB223JA041	MT-GLAZE 22K JA 1/10W
	D0GB223JA070	MT-GLAZE 22K JA 1/10W
R6600	D0GB223JA089	MT-GLAZE 22K JA 1/10W
	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R6602	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R6604	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R6606	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W

Schematic Location	Part No.	Description
R6607	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R6608	D0GDR00JA072	MT-GLAZE 0.000 ZA 1/10W
	D0GDR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R6700	D0GB223JA041	MT-GLAZE 22K JA 1/10W
	D0GB223JA070	MT-GLAZE 22K JA 1/10W
	D0GB223JA089	MT-GLAZE 22K JA 1/10W
R6702	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R6703	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R6704	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R6705	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R6706	D0GB471ZA037	MT-GLAZE 470 FA 1/10W
	D0GB471ZA068	MT-GLAZE 470 FA 1/10W
	D1BB4700A055	MT-GLAZE 470 FA 1/10W
R6707	D0GB100JA041	MT-GLAZE 10 JA 1/10W
	D0GB100JA072	MT-GLAZE 10 JA 1/10W
	D0GB100JA089	MT-GLAZE 10 JA 1/10W
R6708	D0GB221Z0002	MT-GLAZE 220 FA 1/10W
	D0GB221ZA068	MT-GLAZE 220 FA 1/10W
	D1BB2200A055	MT-GLAZE 220 FA 1/10W
R6709	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R6720	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R6722	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R6723	D0GB683ZA038	MT-GLAZE 68K FA 1/10W
	D0GB683ZA068	MT-GLAZE 68K FA 1/10W
	D1BB6802A055	MT-GLAZE 68K FA 1/10W
R6725	D0GB472ZA038	MT-GLAZE 4.7K FA 1/10W
	D0GB472ZA068	MT-GLAZE 4.7K FA 1/10W
	D1BB4701A055	MT-GLAZE 4.7K FA 1/10W
R6726	D0GB153ZA038	MT-GLAZE 15K FA 1/10W
	D0GB153ZA068	MT-GLAZE 15K FA 1/10W
	D1BB1502A055	MT-GLAZE 15K FA 1/10W
R6727	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R6728	D0GB223JA041	MT-GLAZE 22K JA 1/10W
	D0GB223JA070	MT-GLAZE 22K JA 1/10W
	D0GB223JA089	MT-GLAZE 22K JA 1/10W
R6729	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R6730	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R6731	D0GB103JA041	MT-GLAZE 10K JA 1/10W

Schematic Location	Part No.	Description
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R6732	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R6733	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R6734	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R6740	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R6742	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R6743	D0GB223JA041	MT-GLAZE 22K JA 1/10W
	D0GB223JA070	MT-GLAZE 22K JA 1/10W
	D0GB223JA089	MT-GLAZE 22K JA 1/10W
R6744	D0GB104JA041	MT-GLAZE 100K JA 1/10W
	D0GB104JA068	MT-GLAZE 100K JA 1/10W
	D0GB104JA089	MT-GLAZE 100K JA 1/10W
R6745	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R6746	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R6750	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R6755	D0GB681ZA037	MT-GLAZE 680 FA 1/10W
	D0GB681ZA068	MT-GLAZE 680 FA 1/10W
	D1BB6800A055	MT-GLAZE 680 FA 1/10W
R6756	D0GB332ZA038	MT-GLAZE 3.3K FA 1/10W
	D0GB332ZA068	MT-GLAZE 3.3K FA 1/10W
	D1BB3301A055	MT-GLAZE 3.3K FA 1/10W
R6757	D0GB103ZA038	MT-GLAZE 10K FA 1/10W
	D0GB103ZA068	MT-GLAZE 10K FA 1/10W
	D1BB1002A055	MT-GLAZE 10K FA 1/10W
R6758	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
RB5501	1AV4R1D32204G	R-NETWORK 22X4 1/32W
	D1HY2204A012	R-NETWORK 22X4 0.063W
RB5951	D1HYR004A012	R-NETWORK 0X40.063W
RB6530	D1HYR004A012	R-NETWORK 0X40.063W
RB6531	D1HYR004A012	R-NETWORK 0X40.063W
RB6560	D1HYR004A012	R-NETWORK 0X40.063W
RB6561	D1HYR004A012	R-NETWORK 0X40.063W

ASSY,PWB,PWR_ANALOG-Z6TF

CAPACITORS

C601	CGXAV27224ABC	MT-POLYEST	0.22U M	275V
	F0CAF224A030	MT-POLYEST	0.22U K	275V
C602	CGXAV27224ABC	MT-POLYEST	0.22U M	275V
	F0CAF224A030	MT-POLYEST	0.22U K	275V
C604	CGXAV27224ABC	MT-POLYEST	0.22U M	275V

Schematic Location	Part No.	Description
	F0CAF224A030	MT-POLYEST 0.22U K 275V
C608	F1AAF4710001	CERAMIC 470P K 250V
C610	F1AAF4710001	CERAMIC 470P K 250V
C611	F1AAF222A017	CERAMIC 2200P M 250V
C613	F2B2E4710017	ELECT 470U M 250V
C627	F2A1V470B482	ELECT 47U M 35V
C628	F1H1H104A913	CERAMIC 0.1U K 50V
C629	F1H1H104A913	CERAMIC 0.1U K 50V
C630	F1H1H104A913	CERAMIC 0.1U K 50V
C631	F1B3D471A051	CERAMIC 470P K 2K
	F1B3D471A056	CERAMIC 470P K 2K
C632	F1H1H103A219	CERAMIC 0.01U K 50V
C633	F1H1H222A219	CERAMIC 2200P K 50V
C634	F1H1H104A913	CERAMIC 0.1U K 50V
C635	F1H1H104A913	CERAMIC 0.1U K 50V
C637	CG2J103JAPAAAN	MT-POLYEST 0.01U J 630V
	F0C2J103A127	MT-POLYEST 0.01U J 630V
C640	F1H1H104A913	CERAMIC 0.1U K 50V
C653	F1H1H102A219	CERAMIC 1000P K 50V
C655	F2A1V470B482	ELECT 47U M 35V
C719	F2A1H4710103	ELECT 470U M 50V
C720	F1J1H474A757	CERAMIC 0.47U K 50V
C721	F2A1H1510018	ELECT 150U M 50V
C722	F2A1E3310095	ELECT 330U M 25V
C723	F1H1H104A913	CERAMIC 0.1U K 50V
C724	F1H1H103A219	CERAMIC 0.01U K 50V
C725	F1H1H103A219	CERAMIC 0.01U K 50V
C726	F1H1H104A913	CERAMIC 0.1U K 50V
C727	F1B3A471A027	CERAMIC 470P K 1K
C728	F2A1H4710103	ELECT 470U M 50V
C729	CK1E224KGQHNG	CERAMIC 0.22U K 25V
	F1H1E224A050	CERAMIC 0.22U K 25V
C734	F1B3A471A027	CERAMIC 470P K 1K
C736	F2A1E1020139	ELECT 1000U M 25V
C737	F1H1H104A913	CERAMIC 0.1U K 50V
C743	F1B3A471A027	CERAMIC 470P K 1K
C744	F2A1C1520047	ELECT 1500U M 16V
C745	F2A1C1520047	ELECT 1500U M 16V
C746	F1H1H104A913	CERAMIC 0.1U K 50V
C748	F1H1H104A913	CERAMIC 0.1U K 50V
C750	F1H1H104A913	CERAMIC 0.1U K 50V
C751	F2A1E3310095	ELECT 330U M 25V
C753	F1H1H104A913	CERAMIC 0.1U K 50V
C754	F1H1H102A219	CERAMIC 1000P K 50V
C756	F1H1H104A913	CERAMIC 0.1U K 50V
C757	F1H1H104A913	CERAMIC 0.1U K 50V
C758	F2A1E1020139	ELECT 1000U M 25V
C759	F1J1H474A757	CERAMIC 0.47U K 50V
C1020	F1J0J106A004	CERAMIC 10U K 6.3V
	F1J0J106A020	CERAMIC 10U K 6.3V
C1600	F1J0J106A004	CERAMIC 10U K 6.3V
	F1J0J106A020	CERAMIC 10U K 6.3V
C1602	F2A0J221B358	ELECT 220U M 6.3V
C1603	F1H1H104A913	CERAMIC 0.1U K 50V

Schematic Location	Part No.	Description
	C1604	F2A1V471B620 ELECT 470U M 35V
	C1605	F1H1H103A219 CERAMIC 0.01U K 50V
	C1606	F1H1H103A219 CERAMIC 0.01U K 50V
	C1607	F1H1H103A219 CERAMIC 0.01U K 50V
	C1608	F1H1H103A219 CERAMIC 0.01U K 50V
	C1610	F1H1H473A918 CERAMIC 0.047U K 50V
	C1612	F1H1H104A913 CERAMIC 0.1U K 50V
	C1613	F1H1H104A913 CERAMIC 0.1U K 50V
	C1666	F2A1C222B956 ELECT 2200U M 16V
	C1704	F1H1H103A219 CERAMIC 0.01U K 50V
	C1800	F1H1H104A913 CERAMIC 0.1U K 50V
	C1801	F1J0J106A004 CERAMIC 10U K 6.3V
		F1J0J106A020 CERAMIC 10U K 6.3V
	C1803	F1H1H103A219 CERAMIC 0.01U K 50V
	C2405	F1H1H104A913 CERAMIC 0.1U K 50V
	C6101	D0GBR00JA071 MT-GLAZE 0.000 ZA 1/10W
		D0GBR00Z0002 MT-GLAZE 0.000 ZA 1/10W
	C6104	D0GBR00JA071 MT-GLAZE 0.000 ZA 1/10W
		D0GBR00Z0002 MT-GLAZE 0.000 ZA 1/10W
	C6108	F1H1H680A831 CERAMIC 68P J 50V
	C6109	F2A0J222B356 ELECT 2200U M 6.3V
	C6110	F1H1H104A913 CERAMIC 0.1U K 50V
	C6113	F1H1H102A219 CERAMIC 1000P K 50V
	C6114	F1H1H680A831 CERAMIC 68P J 50V
	C6115	F1J0J106A004 CERAMIC 10U K 6.3V
		F1J0J106A020 CERAMIC 10U K 6.3V
	C6116	F2A1C6810044 ELECT 680U M 16V
	C6120	CE0J222MZVALC ELECT 2200U M 6.3V
		F2A0J2220066 ELECT 2200U M 6.3V
DIODES		
	D603	B0EBLT000001 DIODE D4SB80
	D608	B0BC01700015 ZENER DIODE UDZS18B-TE-17
		B0BC018A0383 ZENER DIODE MM3Z 18B
		DZDZ2J180M0LG ZD DIODE DZ2J180M0L
	D609	B0BC01600013 ZENER DIODE UDZS16B-TE-17
		B0BC016A0383 ZENER DIODE MM3Z 16B
		DZDZ2J160M0LG ZD DIODE DZ2J160M0L
	D615	B3PAA0000610 PHOTO COUPLE BPC-817MC
		B3PAA0000612 PHOTO COUPLE PC123X5YFZ0F
	D616	B3PAA0000610 PHOTO COUPLE BPC-817MC
		B3PAA0000612 PHOTO COUPLE PC123X5YFZ0F
	D617	B0ACDL000007 "DIODE BAS316,115"
	D618	B0HADP000012 DIODE EU1
	D620	B0BC026A0007 ZENER DIODE UDZS27B-TE-17
		B0BC027A0383 ZENER DIODE MM3Z 27B
		DZDZ2J270M0LG ZD DIODE DZ2J270M0L
	D621	B0HAGS000003 DIODE EG01C
	D622	B0BC01600013 ZENER DIODE UDZS16B-TE-17
		B0BC016A0383 ZENER DIODE MM3Z 16B
		DZDZ2J160M0LG ZD DIODE DZ2J160M0L
	D641	B0BC6R100010 ZD UDZS-TE-176.2B
		B0BC6R2A0384 ZENER DIODE MM3Z6V2B
		DZDZ2J062M0LG ZD DIODE DZ2J062M0L

Schematic Location	Part No.	Description
D704	B0BC01600013	ZENER DIODE UDZS16B-TE-17
	B0BC016A0383	ZENER DIODE MM3Z 16B
	DZDZ2J160M0LG	ZD DIODE DZ2J160M0L
D705	B0ACDL000007	"DIODE BAS316,115"
D706	B0BC3R6A0384	ZENER DIODE MM3Z3V6B
	B0BC3R700004	ZENER DIODE UDZS3.6B-TE-17
	DZDZ2J036M0LG	ZD DIODE DZ2J036M0L
D707	B0BC3R6A0384	ZENER DIODE MM3Z3V6B
	B0BC3R700004	ZENER DIODE UDZS3.6B-TE-17
	DZDZ2J036M0LG	ZD DIODE DZ2J036M0L
D708	B0FBBM000024	DIODE MBR10200CTF-E1
D709	B0FBBL000001	DIODE MBR10100CTF-E1
D710	B0FBBL000001	DIODE MBR10100CTF-E1
D712	B0ACDL000007	"DIODE BAS316,115"
D714	B0BC013A0007	ZENER DIODE UDZS13B-TE-17
	B0BC130A0383	ZENER DIODE MM3Z13B
	DZDZ2J130M0LG	ZD DIODE DZ2J130M0L
D715	B0ACDL000007	"DIODE BAS316,115"
D716	B0ACDL000007	"DIODE BAS316,115"
D717	B0BC026A0007	ZENER DIODE UDZS27B-TE-17
	B0BC027A0383	ZENER DIODE MM3Z 27B
	DZDZ2J270M0LG	ZD DIODE DZ2J270M0L
D719	B0ACDL000007	"DIODE BAS316,115"
D720	B0BC01600013	ZENER DIODE UDZS16B-TE-17
	B0BC016A0383	ZENER DIODE MM3Z 16B
	DZDZ2J160M0LG	ZD DIODE DZ2J160M0L
D721	B0BC01600013	ZENER DIODE UDZS16B-TE-17
	B0BC016A0383	ZENER DIODE MM3Z 16B
	DZDZ2J160M0LG	ZD DIODE DZ2J160M0L
D722	B0ACDL000007	"DIODE BAS316,115"
D723	B0ACDL000007	"DIODE BAS316,115"
D724	B0ACDL000007	"DIODE BAS316,115"
D1613	B0ACCK000019	DIODE 1SS355
	B0ACDJ000007	DIODE 1SS352-(TPH3)
	B0ACDJ000017	DIODE 1SS352(TH3 F T)
	DDA2J10100LG	DIODE DA2J10100L
D1668	B0ACCK000019	DIODE 1SS355
	B0ACDJ000007	DIODE 1SS352-(TPH3)
	B0ACDJ000017	DIODE 1SS352(TH3 F T)
	DDA2J10100LG	DIODE DA2J10100L
D1750	B0ACCK000019	DIODE 1SS355
	B0ACDJ000007	DIODE 1SS352-(TPH3)
	B0ACDJ000017	DIODE 1SS352(TH3 F T)
	DDA2J10100LG	DIODE DA2J10100L
D2405	B0JCGD000002	DIODE RB551V-30-TE-17
	B0JCGD000014	DIODE DSF05S30U
INTEGRATED CIRCUITS		
IC601	QL6566BTR—P	IC L6566BTR
IC704	QXXAVD290—P	IC AZ431AN-ATRE1
IC705	QXXAVD290—P	IC AZ431AN-ATRE1
IC706	C0DAAYY00072	IC TL431ATA
IC1600	C0CBAYG00009	IC LM1117S-ADJ

Schematic Location	Part No.	Description
COILS		
L701	G0C1R0Z00001	"INDUCTOR,1.0UH"
	G0C1R0Z00002	"INDUCTOR,1.0UH"
L1702	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
L1703	J0JYC0000381	"INDUCTOR , 220 OHM"
L1704	J0JYC0000381	"INDUCTOR , 220 OHM"
L1705	D0GDR00JA072	MT-GLAZE 0.000 ZA 1/10W
	D0GDR00Z0002	MT-GLAZE 0.000 ZA 1/10W
L1706	D0GDR00JA072	MT-GLAZE 0.000 ZA 1/10W
	D0GDR00Z0002	MT-GLAZE 0.000 ZA 1/10W
L1707	J0JYC0000381	"INDUCTOR , 220 OHM"
L1708	J0JYC0000381	"INDUCTOR , 220 OHM"
L1716	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
L1801	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
L1902	D0GDR00JA072	MT-GLAZE 0.000 ZA 1/10W
	D0GDR00Z0002	MT-GLAZE 0.000 ZA 1/10W
L601	1LB4F35B0380N	LINE FILTER
	G0B104J00001	LINE FILTER
L602	1LB4F35B0350N	LINE FILTER
	G0B202Y00002	LINE FILTER
L6100	D0GDR00JA072	MT-GLAZE 0.000 ZA 1/10W
	D0GDR00Z0002	MT-GLAZE 0.000 ZA 1/10W
L6101	D0GDR00JA072	MT-GLAZE 0.000 ZA 1/10W
	D0GDR00Z0002	MT-GLAZE 0.000 ZA 1/10W
L6102	D0GDR00JA072	MT-GLAZE 0.000 ZA 1/10W
	D0GDR00Z0002	MT-GLAZE 0.000 ZA 1/10W
L6103	J0JCC0000371	"INDUCTOR , 120 OHM"
L6104	J0JCC0000371	"INDUCTOR , 120 OHM"
L6105	J0JYC0000381	"INDUCTOR , 220 OHM"
L6106	D1DE1R5JA027	FUSIBLE RES 1.5 J- 1/4W
TRANSISTORS		
Q603	B1DEGR000063	"TR TK10A60D(STA4,Q,M)"
Q610	B1CFHF000007	TR 2N7002
Q611	B1CFHF000007	TR 2N7002
Q680	B1CFHF000007	TR 2N7002
Q681	B1CFHF000007	TR 2N7002
Q701	B1ABCE000028	TR MMBTSC3928R
	B1ABDF000013	TR 2SC3928A1R
	B1ABDF000024	TR 2SC3928A1S
Q702	B1CFHF000007	TR 2N7002
Q704	B1ABCE000028	TR MMBTSC3928R
	B1ABDF000013	TR 2SC3928A1R
	B1ABDF000024	TR 2SC3928A1S
Q706	B1ADCE000028	TR MMBTSA1235F
	B1ADCF000194	TR ISA1235AC1F
	B1ADCF000201	TR ISA1235AC1E
Q707	B1ABCE000028	TR MMBTSC3928R
	B1ABDF000013	TR 2SC3928A1R
	B1ABDF000024	TR 2SC3928A1S
Q708	B1ABCE000028	TR MMBTSC3928R

Schematic Location	Part No.	Description
Q709	B1ABDF000013	TR 2SC3928A1R
	B1ABDF000024	TR 2SC3928A1S
	B1DHGE000001	TR SFT1307-TL-E
Q712	TRSD160P05—G	TR RSD160P05FU7TL
	B1DHGE000001	TR SFT1307-TL-E
	TRSD160P05—G	TR RSD160P05FU7TL
Q713	B1ABCE000028	TR MMBTSC3928R
	B1ABDF000013	TR 2SC3928A1R
	B1ABDF000024	TR 2SC3928A1S
Q714	B1ABCE000028	TR MMBTSC3928R
	B1ABDF000013	TR 2SC3928A1R
	B1ABDF000024	TR 2SC3928A1S
Q1610	B1ABCE000028	TR MMBTSC3928R
	B1ABDF000013	TR 2SC3928A1R
	B1ABDF000024	TR 2SC3928A1S
Q1611	B1CHPD000006	TR CPH3338-T-TL-E
	B1DHDD000041	TR AO3407A
Q1750	B1ABCE000028	TR MMBTSC3928R
	B1ABDF000013	TR 2SC3928A1R
	B1ABDF000024	TR 2SC3928A1S
Q1751	B1ABCE000028	TR MMBTSC3928R
	B1ABDF000013	TR 2SC3928A1R
	B1ABDF000024	TR 2SC3928A1S
Q1810	B1ABCE000028	TR MMBTSC3928R
	B1ABDF000013	TR 2SC3928A1R
	B1ABDF000024	TR 2SC3928A1S
Q1813	B1ABCE000028	TR MMBTSC3928R
	B1ABDF000013	TR 2SC3928A1R
	B1ABDF000024	TR 2SC3928A1S

RESISTORS

R601	D4CAC5R10001	THERMISTOR NTPAD5R1LDNB0
R602	RXXAVA685JABN	RESISTER 6.8M JA 1/2W
R604	RXXAVA105JABN	RESISTER 1.0M JA 1/2W
R608	D0GB101JA041	MT-GLAZE 100 JA 1/10W
	D0GB101JA069	MT-GLAZE 100 JA 1/10W
	D0GB101JA089	MT-GLAZE 100 JA 1/10W
R610	D0GZ330J0001	MT-GLAZE 33 JA 1/4W
R6100	D0GB470J0002	MT-GLAZE 47 JA 1/10W
	D0GB470JA041	MT-GLAZE 47 JA 1/10W
	D0GB470JA089	MT-GLAZE 47 JA 1/10W
R6101	D0GB470J0002	MT-GLAZE 47 JA 1/10W
	D0GB470JA041	MT-GLAZE 47 JA 1/10W
	D0GB470JA089	MT-GLAZE 47 JA 1/10W
R611	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R612	D0GB223JA041	MT-GLAZE 22K JA 1/10W
	D0GB223JA070	MT-GLAZE 22K JA 1/10W
	D0GB223JA089	MT-GLAZE 22K JA 1/10W
R613	D0C1R68JA070	OXIDE-MT 0.68 JA 1W
R614	D0GB223JA041	MT-GLAZE 22K JA 1/10W
	D0GB223JA070	MT-GLAZE 22K JA 1/10W
	D0GB223JA089	MT-GLAZE 22K JA 1/10W

Schematic Location	Part No.	Description
R626	D0GB223JA041	MT-GLAZE 22K JA 1/10W
	D0GB223JA070	MT-GLAZE 22K JA 1/10W
	D0GB223JA089	MT-GLAZE 22K JA 1/10W
R627	D0GB104ZA041	MT-GLAZE 100K FA 1/10W
	D0GB104ZA068	MT-GLAZE 100K FA 1/10W
	D1BB1003A055	MT-GLAZE 100K FA 1/10W
R628	D0GB105JA041	MT-GLAZE 1M JA 1/10W
	D0GB105JA071	MT-GLAZE 1M JA 1/10W
	D0GB105JA089	MT-GLAZE 1M JA 1/10W
R632	D0GB102ZA038	MT-GLAZE 1K FA 1/10W
	D0GB102ZA068	MT-GLAZE 1K FA 1/10W
	D1BB1001A055	MT-GLAZE 1K FA 1/10W
R633	D0GF105JA064	MT-GLAZE 1M JA 1/4W
	D0GZ105JA023	MT-GLAZE 1M JA 1/4W
R634	D0GF105JA064	MT-GLAZE 1M JA 1/4W
	D0GZ105JA023	MT-GLAZE 1M JA 1/4W
R635	D0GB684JA041	MT-GLAZE 680K JA 1/10W
	D0GB684JA068	MT-GLAZE 680K JA 1/10W
	D0GB684JA089	MT-GLAZE 680K JA 1/10W
R636	RS1R220JGCAEN	OXIDE-MT 0.22 JA 1W
R637	D0GB102JA041	MT-GLAZE 1K JA 1/10W
	D0GB102JA071	MT-GLAZE 1K JA 1/10W
	D0GB102JA089	MT-GLAZE 1K JA 1/10W
R638	D0GZ220JA018	MT-GLAZE 22 JA 1/4W
R639	D0GZ100JA018	MT-GLAZE 10 JA 1/4W
R640	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R641	D0GB472JA041	MT-GLAZE 4.7K JA 1/10W
	D0GB472JA072	MT-GLAZE 4.7K JA 1/10W
	D0GB472JA089	MT-GLAZE 4.7K JA 1/10W
R642	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R643	D0GB153JA041	MT-GLAZE 15K JA 1/10W
	D0GB153JA072	MT-GLAZE 15K JA 1/10W
	D0GB153JA089	MT-GLAZE 15K JA 1/10W
R644	D0GZ563JA018	MT-GLAZE 56K JA 1/4W
R645	D0C2683JA119	OXIDE-MT 68K JA 2W
R646	D0GZ563JA018	MT-GLAZE 56K JA 1/4W
R647	D0GB334JA041	MT-GLAZE 330K JA 1/10W
	D0GB334JA068	MT-GLAZE 330K JA 1/10W
	D0GB334JA089	MT-GLAZE 330K JA 1/10W
R648	D0GB472JA041	MT-GLAZE 4.7K JA 1/10W
	D0GB472JA072	MT-GLAZE 4.7K JA 1/10W
	D0GB472JA089	MT-GLAZE 4.7K JA 1/10W
R650	D0GB104JA041	MT-GLAZE 100K JA 1/10W
	D0GB104JA068	MT-GLAZE 100K JA 1/10W
	D0GB104JA089	MT-GLAZE 100K JA 1/10W
R651	D0GB105JA041	MT-GLAZE 1M JA 1/10W
	D0GB105JA071	MT-GLAZE 1M JA 1/10W
	D0GB105JA089	MT-GLAZE 1M JA 1/10W
R652	D0GB105JA041	MT-GLAZE 1M JA 1/10W
	D0GB105JA071	MT-GLAZE 1M JA 1/10W

Schematic Location	Part No.	Description
	D0GB105JA089	MT-GLAZE 1M JA 1/10W
R653	D0GZ563JA018	MT-GLAZE 56K JA 1/4W
R703	D0GB273JA041	MT-GLAZE 27K JA 1/10W
	D0GB273JA072	MT-GLAZE 27K JA 1/10W
	D0GB273JA089	MT-GLAZE 27K JA 1/10W
R704	D0GB105JA04	MT-GLAZE 1M JA 1/10W
	D0GB105JA071	MT-GLAZE 1M JA 1/10W
	D0GB105JA089	MT-GLAZE 1M JA 1/10W
R705	D0GB562JA041	MT-GLAZE 5.6K JA 1/10W
	D0GB562JA072	MT-GLAZE 5.6K JA 1/10W
	D0GB562JA089	MT-GLAZE 5.6K JA 1/10W
R706	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R707	D0GB103ZA038	MT-GLAZE 10K FA 1/10W
	D0GB103ZA068	MT-GLAZE 10K FA 1/10W
	D1BB1002A055	MT-GLAZE 10K FA 1/10W
R708	D0GB183ZA038	MT-GLAZE 18K FA 1/10W
	D0GB183ZA068	MT-GLAZE 18K FA 1/10W
	D1BB1802A055	MT-GLAZE 18K FA 1/10W
R709	D0GB223ZA038	MT-GLAZE 22K FA 1/10W
	D0GB223ZA068	MT-GLAZE 22K FA 1/10W
	D1BB2202A055	MT-GLAZE 22K FA 1/10W
R715	D0GB562JA041	MT-GLAZE 5.6K JA 1/10W
	D0GB562JA072	MT-GLAZE 5.6K JA 1/10W
	D0GB562JA089	MT-GLAZE 5.6K JA 1/10W
R719	D0GB222JA041	MT-GLAZE 2.2K JA 1/10W
	D0GB222JA072	MT-GLAZE 2.2K JA 1/10W
	D0GB222JA089	MT-GLAZE 2.2K JA 1/10W
R720	D0GZ103JA018	MT-GLAZE 10K JA 1/4W
R721	D0GB222JA041	MT-GLAZE 2.2K JA 1/10W
	D0GB222JA072	MT-GLAZE 2.2K JA 1/10W
	D0GB222JA089	MT-GLAZE 2.2K JA 1/10W
R722	D0GB471JA041	MT-GLAZE 470 JA 1/10W
	D0GB471JA069	MT-GLAZE 470 JA 1/10W
	D0GB471JA089	MT-GLAZE 470 JA 1/10W
R723	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R724	D0GB105JA041	MT-GLAZE 1M JA 1/10W
	D0GB105JA071	MT-GLAZE 1M JA 1/10W
	D0GB105JA089	MT-GLAZE 1M JA 1/10W
R725	D0GB105JA041	MT-GLAZE 1M JA 1/10W
	D0GB105JA071	MT-GLAZE 1M JA 1/10W
	D0GB105JA089	MT-GLAZE 1M JA 1/10W
R727	D0GB104JA041	MT-GLAZE 100K JA 1/10W
	D0GB104JA068	MT-GLAZE 100K JA 1/10W
	D0GB104JA089	MT-GLAZE 100K JA 1/10W
R730	D0GB222JA041	MT-GLAZE 2.2K JA 1/10W
	D0GB222JA072	MT-GLAZE 2.2K JA 1/10W
	D0GB222JA089	MT-GLAZE 2.2K JA 1/10W
R731	D0GB912ZA038	MT-GLAZE 9.1K FA 1/10W
R732	D0GB751ZA037	MT-GLAZE 750 FA 1/10W

Schematic Location	Part No.	Description
R733	D0GB103ZA038	MT-GLAZE 10K FA 1/10W
	D0GB103ZA068	MT-GLAZE 10K FA 1/10W
	D1BB1002A055	MT-GLAZE 10K FA 1/10W
R735	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R736	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R737	D0GB223JA041	MT-GLAZE 22K JA 1/10W
	D0GB223JA070	MT-GLAZE 22K JA 1/10W
	D0GB223JA089	MT-GLAZE 22K JA 1/10W
R738	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R739	D0GB102JA041	MT-GLAZE 1K JA 1/10W
	D0GB102JA071	MT-GLAZE 1K JA 1/10W
	D0GB102JA089	MT-GLAZE 1K JA 1/10W
R740	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R741	D0GB562JA041	MT-GLAZE 5.6K JA 1/10W
	D0GB562JA072	MT-GLAZE 5.6K JA 1/10W
	D0GB562JA089	MT-GLAZE 5.6K JA 1/10W
R742	D0GB273JA041	MT-GLAZE 27K JA 1/10W
	D0GB273JA072	MT-GLAZE 27K JA 1/10W
	D0GB273JA089	MT-GLAZE 27K JA 1/10W
R744	D0GB102JA041	MT-GLAZE 1K JA 1/10W
	D0GB102JA071	MT-GLAZE 1K JA 1/10W
	D0GB102JA089	MT-GLAZE 1K JA 1/10W
R745	D0GB102JA041	MT-GLAZE 1K JA 1/10W
	D0GB102JA071	MT-GLAZE 1K JA 1/10W
	D0GB102JA089	MT-GLAZE 1K JA 1/10W
R746	D0GB102JA041	MT-GLAZE 1K JA 1/10W
	D0GB102JA071	MT-GLAZE 1K JA 1/10W
	D0GB102JA089	MT-GLAZE 1K JA 1/10W
R747	D0GB183JA041	MT-GLAZE 18K JA 1/10W
	D0GB183JA072	MT-GLAZE 18K JA 1/10W
	D0GB183JA089	MT-GLAZE 18K JA 1/10W
R748	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R749	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R750	D0GB222ZA038	MT-GLAZE 2.2K FA 1/10W
	D0GB222ZA068	MT-GLAZE 2.2K FA 1/10W
	D1BB2201A055	MT-GLAZE 2.2K FA 1/10W
R751	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R752	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W

Schematic Location	Part No.	Description
R753	D0GB103JA089	MT-GLAZE 10K JA 1/10W
	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
R755	D0GB103JA089	MT-GLAZE 10K JA 1/10W
	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
R756	D0GB103JA089	MT-GLAZE 10K JA 1/10W
	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
R757	D0GB103JA089	MT-GLAZE 10K JA 1/10W
	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
R758	D0GB103JA089	MT-GLAZE 10K JA 1/10W
	D0GB223JA041	MT-GLAZE 22K JA 1/10W
	D0GB223JA070	MT-GLAZE 22K JA 1/10W
R759	D0GB223JA089	MT-GLAZE 22K JA 1/10W
	D0GB102JA041	MT-GLAZE 1K JA 1/10W
	D0GB102JA071	MT-GLAZE 1K JA 1/10W
R766	D0GB102JA089	MT-GLAZE 1K JA 1/10W
	D0GB395JA072	MT-GLAZE 3.9M JA 1/10W
	D0GB103JA041	MT-GLAZE 10K JA 1/10W
R772	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
	D0GB332ZA038	MT-GLAZE 3.3K FA 1/10W
R773	D0GB332ZA068	MT-GLAZE 3.3K FA 1/10W
	D1BB3301A055	MT-GLAZE 3.3K FA 1/10W
	D0GB273ZA038	MT-GLAZE 27K FA 1/10W
R774	D0GB273ZA068	MT-GLAZE 27K FA 1/10W
	D1BB2702A055	MT-GLAZE 27K FA 1/10W
	D0GB103JA041	MT-GLAZE 10K JA 1/10W
R783	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
R1002	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R1004	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R1020	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R1022	D0GB750JA041	MT-GLAZE 75 JA 1/10W
	D0GB750JA072	MT-GLAZE 75 JA 1/10W
	D0GB750JA089	MT-GLAZE 75 JA 1/10W
R1023	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
	D0GB820JA041	MT-GLAZE 82 JA 1/10W
R1024	D0GB820JA072	MT-GLAZE 82 JA 1/10W
	D0GB820JA089	MT-GLAZE 82 JA 1/10W
	D0GB750JA041	MT-GLAZE 75 JA 1/10W
R1025	D0GB750JA072	MT-GLAZE 75 JA 1/10W
	D0GB750JA089	MT-GLAZE 75 JA 1/10W
	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
R1035	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R1036	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W

Schematic Location	Part No.	Description
R1600	D0GB121ZA038	MT-GLAZE 120 FA 1/10W
	D0GB121ZA068	MT-GLAZE 120 FA 1/10W
	D1BB1200A055	MT-GLAZE 120 FA 1/10W
R1601	D0GB120JA041	MT-GLAZE 12 JA 1/10W
	D0GB120JA072	MT-GLAZE 12 JA 1/10W
	D0GB120JA089	MT-GLAZE 12 JA 1/10W
R1602	D0GB221Z0002	MT-GLAZE 220 FA 1/10W
	D0GB221ZA068	MT-GLAZE 220 FA 1/10W
	D1BB2200A055	MT-GLAZE 220 FA 1/10W
R1610	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R1611	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
	D0GB105JA041	MT-GLAZE 1M JA 1/10W
R1612	D0GB105JA071	MT-GLAZE 1M JA 1/10W
	D0GB105JA089	MT-GLAZE 1M JA 1/10W
	D0GB103JA041	MT-GLAZE 10K JA 1/10W
R1616	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
R1664	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R1665	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R1668	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R1700	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R1701	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R1702	D0GB102JA041	MT-GLAZE 1K JA 1/10W
	D0GB102JA071	MT-GLAZE 1K JA 1/10W
	D0GB102JA089	MT-GLAZE 1K JA 1/10W
R1707	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R1708	D0GB183JA041	MT-GLAZE 18K JA 1/10W
	D0GB183JA072	MT-GLAZE 18K JA 1/10W
	D0GB183JA089	MT-GLAZE 18K JA 1/10W
R1751	D0GB182JA041	MT-GLAZE 1.8K JA 1/10W
	D0GB182JA072	MT-GLAZE 1.8K JA 1/10W
	D0GB182JA089	MT-GLAZE 1.8K JA 1/10W
R1752	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R1753	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R1754	D0GB332JA041	MT-GLAZE 3.3K JA 1/10W
	D0GB332JA072	MT-GLAZE 3.3K JA 1/10W
	D0GB332JA089	MT-GLAZE 3.3K JA 1/10W
R1790	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R1791	D0GB101JA041	MT-GLAZE 100 JA 1/10W
	D0GB101JA069	MT-GLAZE 100 JA 1/10W
	D0GB101JA069	MT-GLAZE 100 JA 1/10W

Schematic Location	Part No.	Description
	D0GB101JA089	MT-GLAZE 100 JA 1/10W
R1792	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R1797	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R1800	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R1803	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R1804	D0GB222JA041	MT-GLAZE 2.2K JA 1/10W
	D0GB222JA072	MT-GLAZE 2.2K JA 1/10W
	D0GB222JA089	MT-GLAZE 2.2K JA 1/10W
R1810	D0GB331JA041	MT-GLAZE 330 JA 1/10W
	D0GB331JA069	MT-GLAZE 330 JA 1/10W
	D0GB331JA089	MT-GLAZE 330 JA 1/10W
R1811	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R1812	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R1813	D0GB331JA041	MT-GLAZE 330 JA 1/10W
	D0GB331JA069	MT-GLAZE 330 JA 1/10W
	D0GB331JA089	MT-GLAZE 330 JA 1/10W
R1843	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R1901	D0GB392JA041	MT-GLAZE 3.9K JA 1/10W
	D0GB392JA072	MT-GLAZE 3.9K JA 1/10W
	D0GB392JA089	MT-GLAZE 3.9K JA 1/10W
R1902	D0GB682JA041	MT-GLAZE 6.8K JA 1/10W
	D0GB682JA072	MT-GLAZE 6.8K JA 1/10W
	D0GB682JA089	MT-GLAZE 6.8K JA 1/10W
R1903	D0GB682JA041	MT-GLAZE 6.8K JA 1/10W
	D0GB682JA072	MT-GLAZE 6.8K JA 1/10W
	D0GB682JA089	MT-GLAZE 6.8K JA 1/10W
R1904	D0GB392JA041	MT-GLAZE 3.9K JA 1/10W
	D0GB392JA072	MT-GLAZE 3.9K JA 1/10W
	D0GB392JA089	MT-GLAZE 3.9K JA 1/10W
R1905	D0GB682JA041	MT-GLAZE 6.8K JA 1/10W
	D0GB682JA072	MT-GLAZE 6.8K JA 1/10W
	D0GB682JA089	MT-GLAZE 6.8K JA 1/10W
R1906	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R1907	D0GB102JA041	MT-GLAZE 1K JA 1/10W
	D0GB102JA071	MT-GLAZE 1K JA 1/10W
	D0GB102JA089	MT-GLAZE 1K JA 1/10W
R1908	D0GB682JA041	MT-GLAZE 6.8K JA 1/10W
	D0GB682JA072	MT-GLAZE 6.8K JA 1/10W
	D0GB682JA089	MT-GLAZE 6.8K JA 1/10W
R1909	D0GB123JA041	MT-GLAZE 12K JA 1/10W
	D0GB123JA072	MT-GLAZE 12K JA 1/10W
	D0GB123JA089	MT-GLAZE 12K JA 1/10W
R1910	D0GB103JA041	MT-GLAZE 10K JA 1/10W

Schematic Location	Part No.	Description
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R1911	D0GB102JA041	MT-GLAZE 1K JA 1/10W
	D0GB102JA071	MT-GLAZE 1K JA 1/10W
	D0GB102JA089	MT-GLAZE 1K JA 1/10W
R2400	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R2401	D0GBR00JA071	MT-GLAZE 0.000 ZA 1/10W
	D0GBR00Z0002	MT-GLAZE 0.000 ZA 1/10W
R2408	D0GB101JA041	MT-GLAZE 100 JA 1/10W
	D0GB101JA069	MT-GLAZE 100 JA 1/10W
	D0GB101JA089	MT-GLAZE 100 JA 1/10W
R2409	D0GB101JA041	MT-GLAZE 100 JA 1/10W
	D0GB101JA069	MT-GLAZE 100 JA 1/10W
	D0GB101JA089	MT-GLAZE 100 JA 1/10W
R2410	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R2411	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R2412	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R2413	D0GB103JA041	MT-GLAZE 10K JA 1/10W
	D0GB103JA072	MT-GLAZE 10K JA 1/10W
	D0GB103JA089	MT-GLAZE 10K JA 1/10W
R2418	D0GB101JA041	MT-GLAZE 100 JA 1/10W
	D0GB101JA069	MT-GLAZE 100 JA 1/10W
	D0GB101JA089	MT-GLAZE 100 JA 1/10W
R2419	D0GB101JA041	MT-GLAZE 100 JA 1/10W
	D0GB101JA069	MT-GLAZE 100 JA 1/10W
	D0GB101JA089	MT-GLAZE 100 JA 1/10W

Schematic Location	Part No.	Description
--------------------	----------	-------------

MISCELLANEOUS

⚠ A100	1LG0B10Y082A0	"ASSY,PWB,ANALOG-COMP-Z6TF"
⚠ A101	1LG0B10Y082AA	"ASSY,PWB,PWR_ANALOG-Z6TF"
⚠ A102	1LG0B10Y082AB	"ASSY,PWB,RC_LED-Z6TF"
⚠ A200	1LG0B10Y083A0	"ASSY,PWB,DIGITAL_Z-Z6TF"
⚠ A6102	J3ACAAB00004	"TUNER,U/V"
⚠ EL901	1AV4T40C18600	LCD(LC320WXN-SCB1)
	1AV4T40C18601	LCD(LC320WXN-SCB1)
⚠ F601	K5G402Y00011	FUSE 250V 4A
K55SP	K1KA04AA0180	"PLUG,4P"
K5A	K1KY40B00017	"PLUG,HOUSING 40P"
K5B	K1KY32B00007	"PLUG,HOUSING 32P"
K5LV	K1KY39A00001	"PLUG,39P(40-1)"
K6530	K1FY119E0042	"SOCKET,HDMI 19P"
K6560	K1FY119E0042	"SOCKET,HDMI 19P"
KUSB	K1FY104B0066	"SOCKET,USB 4P"
	K1FY104B0069	"SOCKET,USB 4P"
K1000	K2HA3YYA0002	"JACK,RCA-3"
K1020	K2HA1YYB0026	"JACK,RCA-1"
K1030	K2HA5YYA0004	"JACK,RCA-5"
K16A	K1KY40BA0348	"SOCKET,PWB 40P"
K16B	K1KY32BA0348	"SOCKET,PWB 32P"
K2401	K2HC1YYB0066	"JACK,PHONE D3.6"
K601	K1KA02B00295	"PLUG,HOUSING 2P"
SPL	L0AA12C00016	"SPEAKER,8"
SPR	L0AA12C00016	"SPEAKER,8"
SW1901	1AV4S10B5650J	"SWITCH,PUSH 1P-1TX1"
SW1902	1AV4S10B5650J	"SWITCH,PUSH 1P-1TX1"
SW1903	1AV4S10B5650J	"SWITCH,PUSH 1P-1TX1"
SW1904	1AV4S10B5650J	"SWITCH,PUSH 1P-1TX1"
SW1905	1AV4S10B5650J	"SWITCH,PUSH 1P-1TX1"
SW1906	1AV4S10B5650J	"SWITCH,PUSH 1P-1TX1"
SW1907	1AV4S10B5650J	"SWITCH,PUSH 1P-1TX1"
T601	G4CYAYY00246	"TRANS,POWER,PULSE"
VA601	D4EAY3810001	VARISTOR MYG3-14K385
	D4EAY6210004	VARISTOR S14K385E2K1
⚠ W901	K2CB2YY00045	"CORD,POWER-2.15MK-VTR-02"
	K2CB2YY00076	"CORD,POWER-2150MK"
⚠ WK5LV-PN	K1PY40Y00013	"CORD, 30P-40P(LVDS)"
	K1PY40Y00017	"CORD, 30P-40P(LVDS)"
⚠ X5500	H0J250500119	"OSC,CRYSTAL 25MHZ"
INVERTER LC320WXN-SCB1		86632L-0627A-
T-CON/PN LC320WXN-SCB1		86871L-2058A-

SERVICE PARTS

"For Digital Main board replacement please get the correct assembly name/part number"

Service Name: ASSY,PWB,DIGITAL_Z-Z6TF

Japan BOM part number: 1LG0B10Y083A0

"For Analog board replacement please get the correct assembly name/part number"

Service Name: ASSY,PWB,PWR_ANALOG-Z6TF

Japan BOM part number: 1LG0B10Y082AA

NOTE: This is a sub-assembly (A100) from ASSY,PWB,ANALOG-COMP-Z6TF

"For RC/LED unit replacement please get the correct assembly name/part number"

Service Name: ASSY,PWB,RC_LED-Z6TF

Japan BOM part number: 1LG0B10Y082AB

NOTE: This is a sub-assembly (A100) from ASSY,PWB,ANALOG-COMP-Z6TF

"For Inverter Board replacement please get the correct assembly name/part number"

Service Name: INVERTER

Japan BOM part number: 86632L-0627A-


"For T-CON Board replacement please get the correct assembly name/part number"

Service Name: T-CON/PN


Japan BOM part number: 86871L-2058A-

COMPONENT AND TEST POINT LOCATIONS


ANALOG BOARD PARTS SIDE

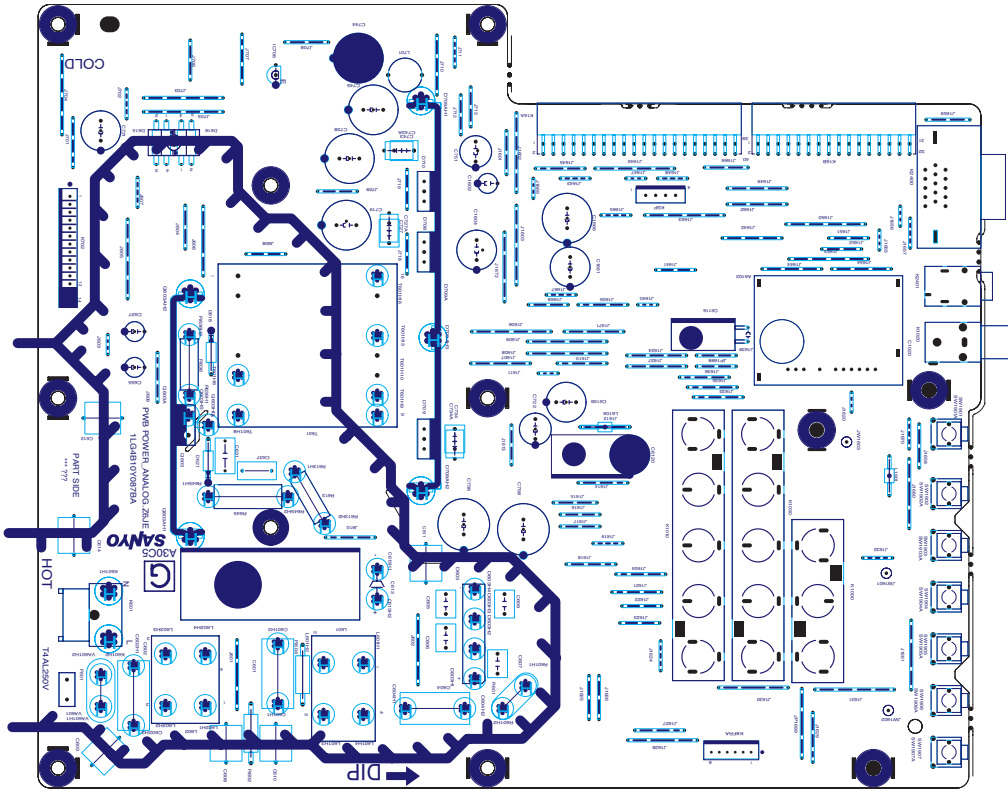


PWB RC LED PARTS SIDE

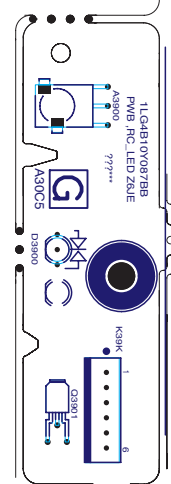


ANALOG BOARD SOLDER SIDE

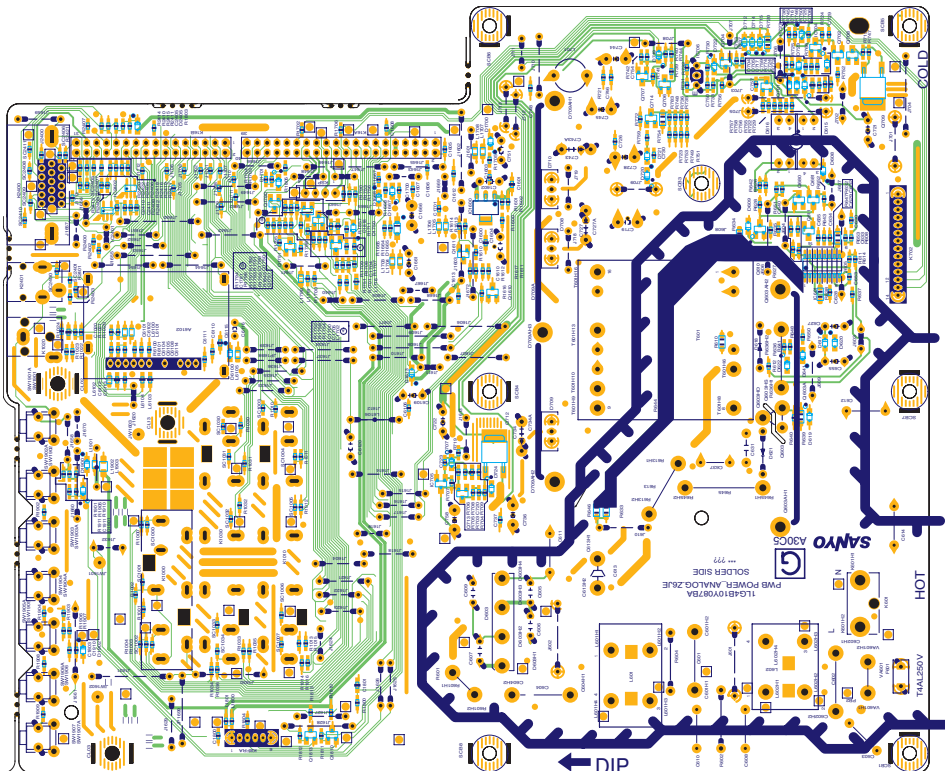


PWB RC LED SOLDER SIDE

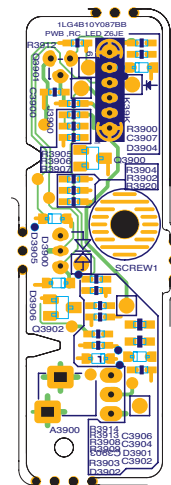


DIGITAL BOARD PARTS SIDE

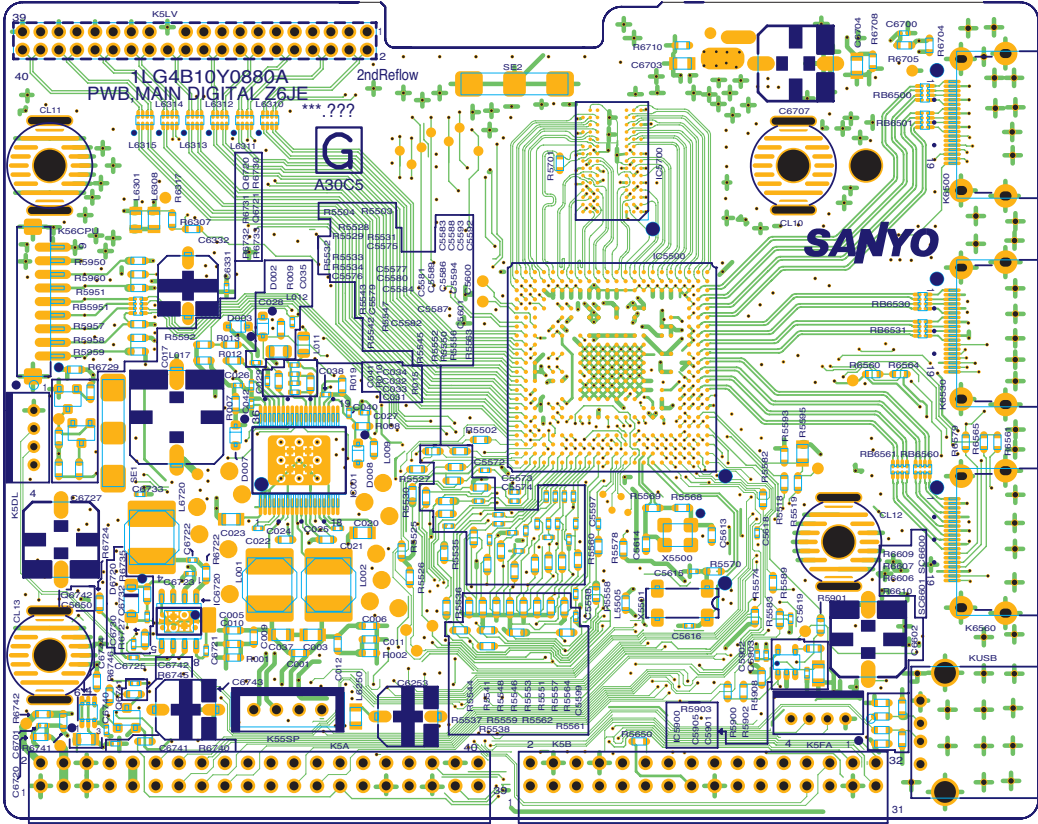


DIGITAL BOARD SOLDER SIDE

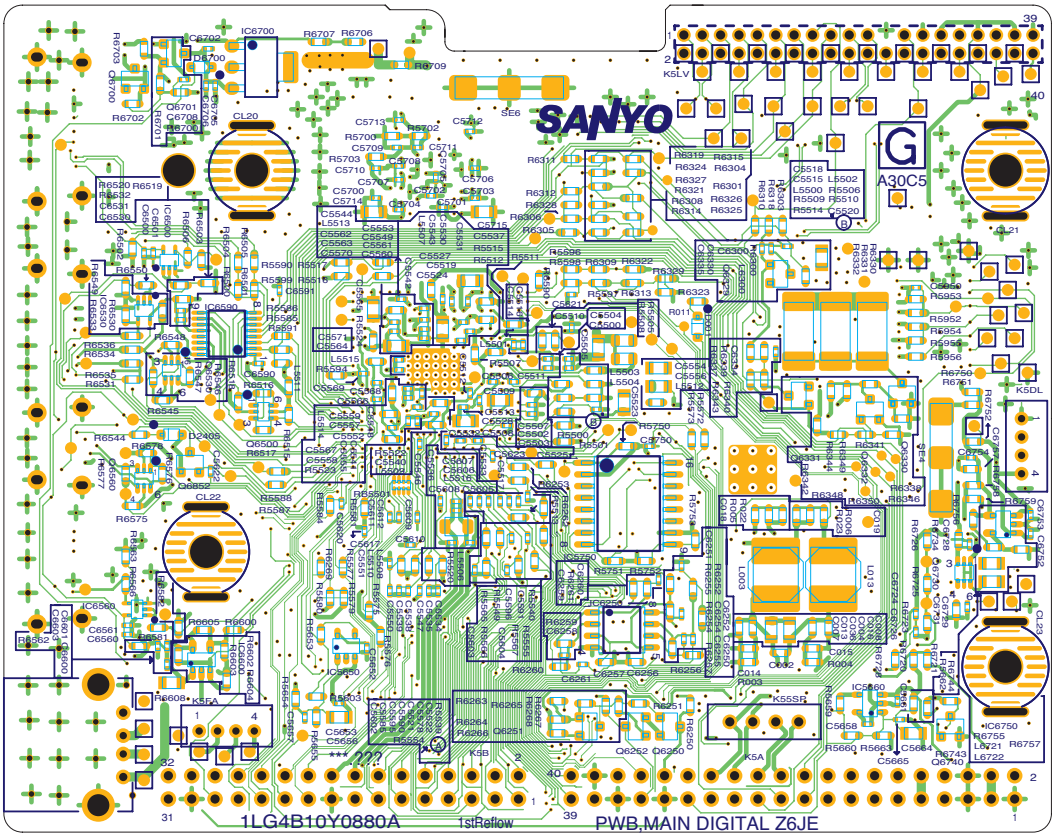

BLOCK DIAGRAM POWER LINES

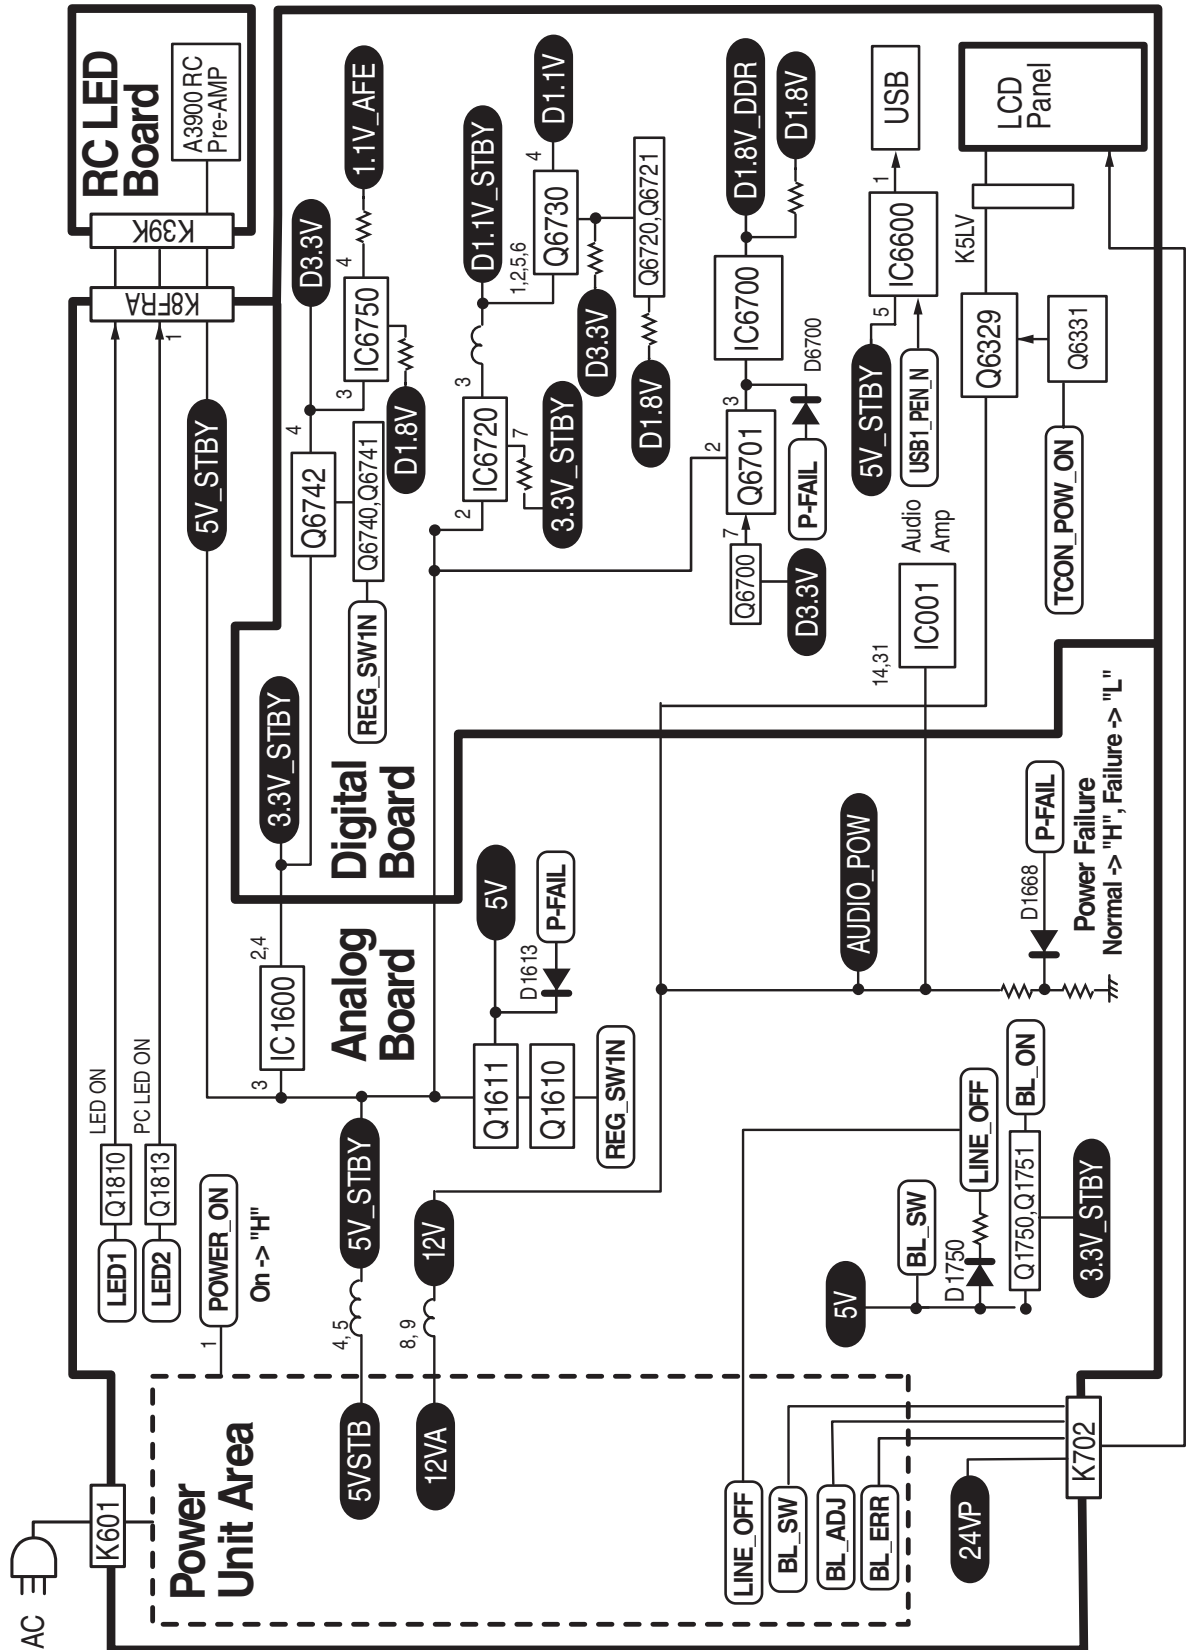


BLOCK DIAGRAM SIGNAL LINES

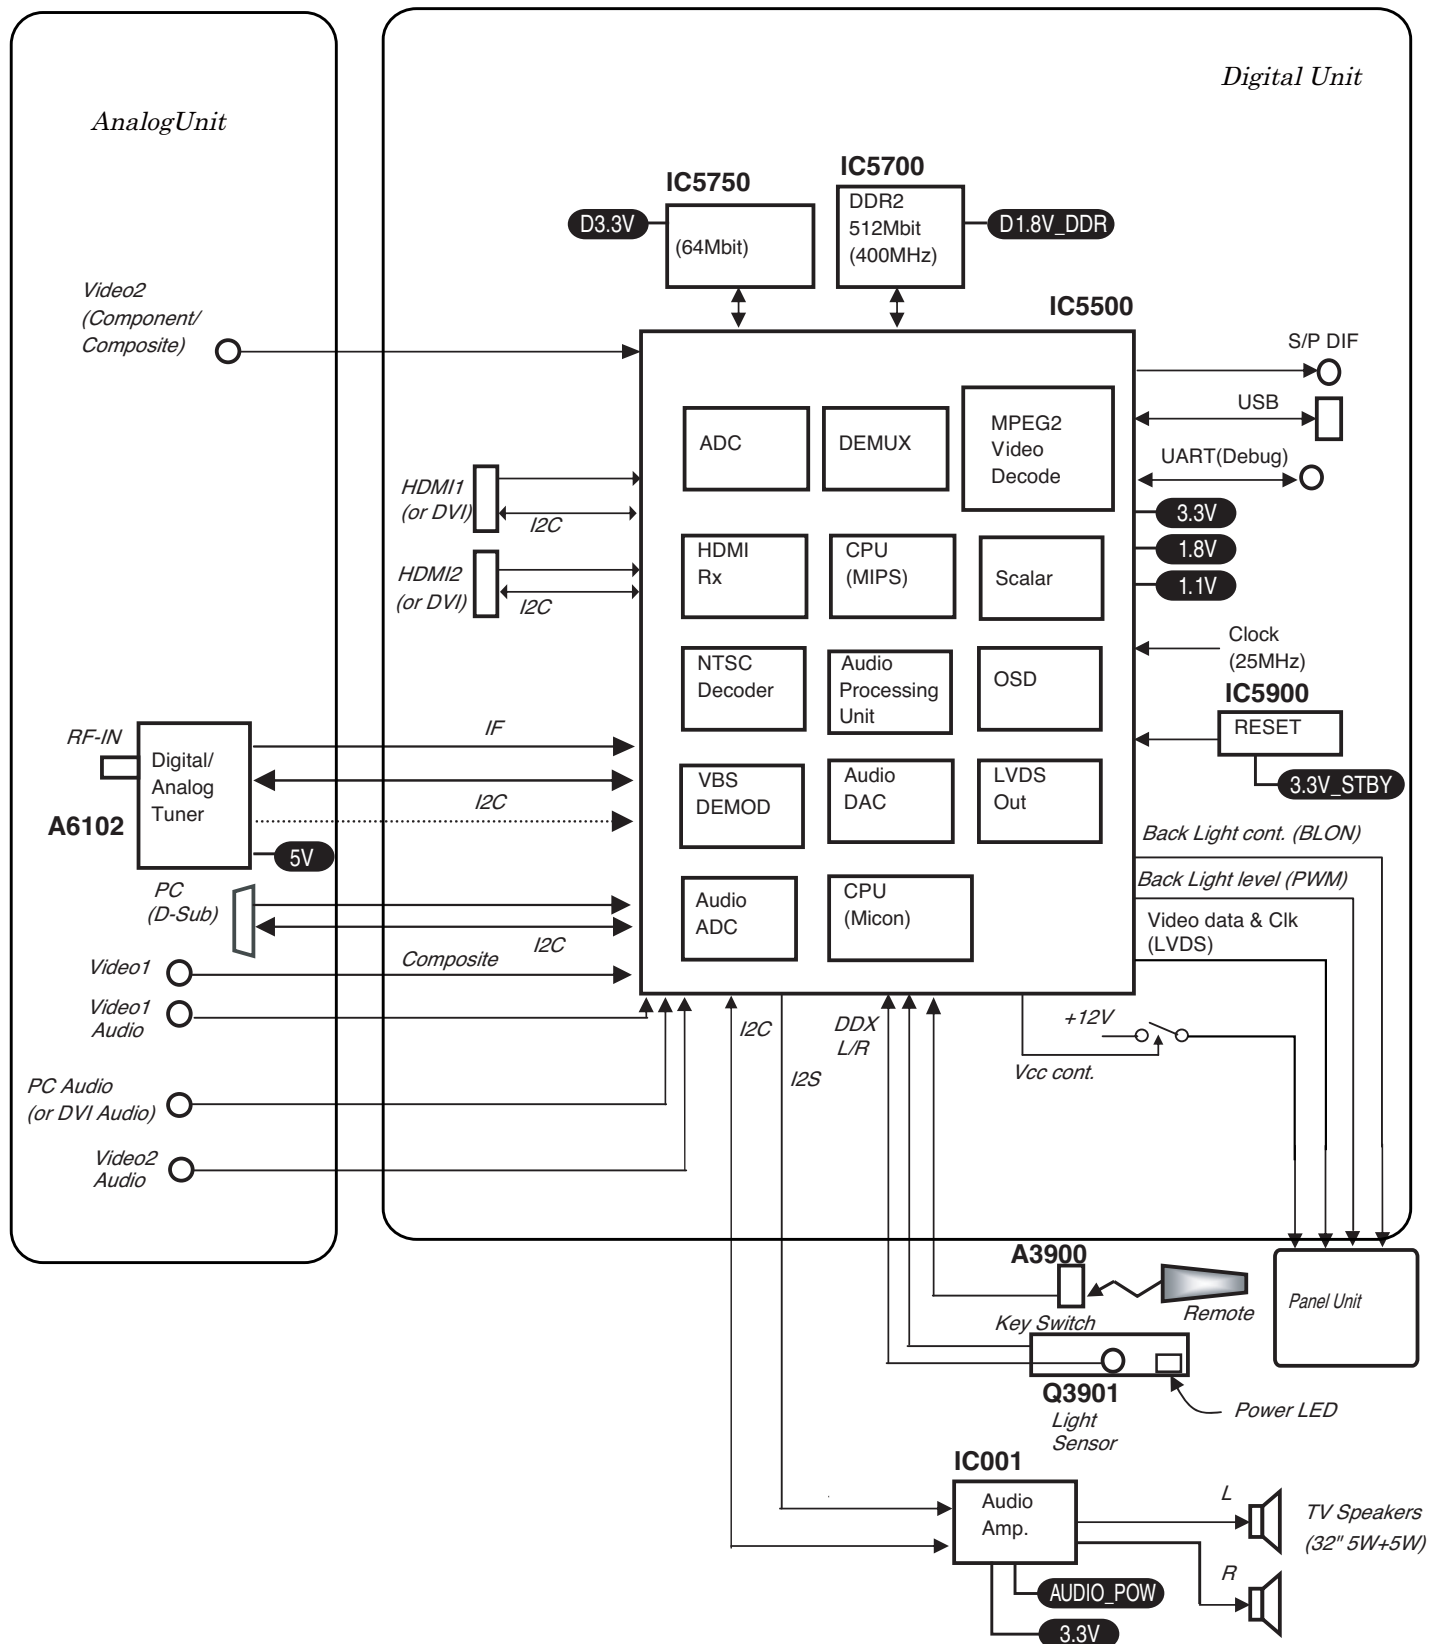


IC BLOCK DIAGRAMS


IC001_C1AB00003628_IC STA333W13TR, Audio AMP

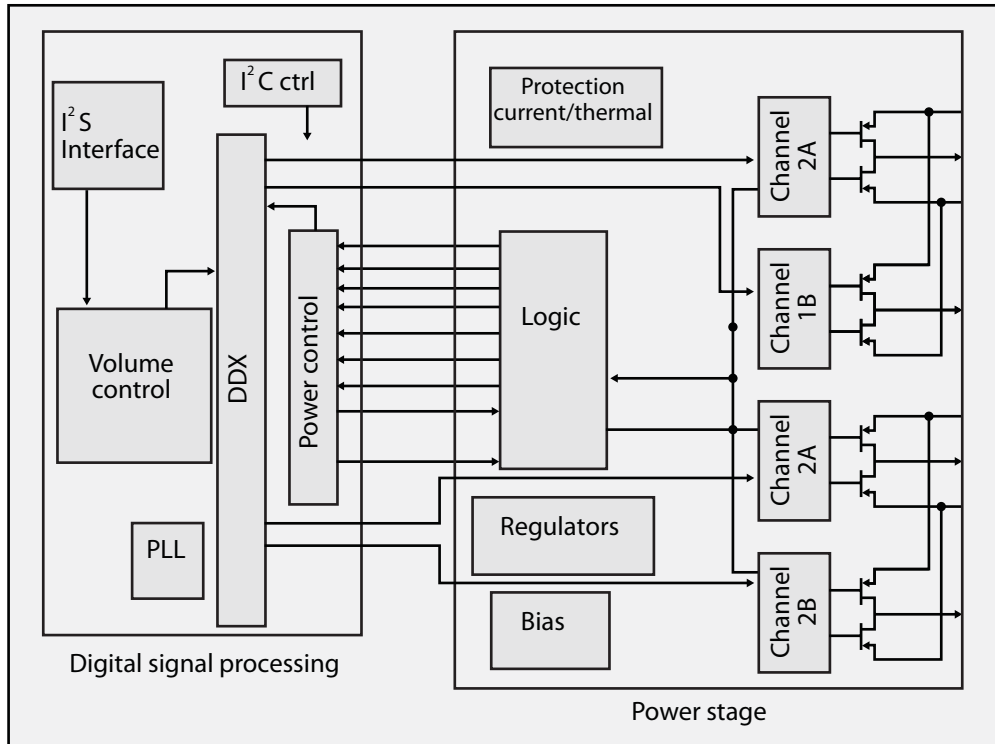


IC5750, Flash Memory

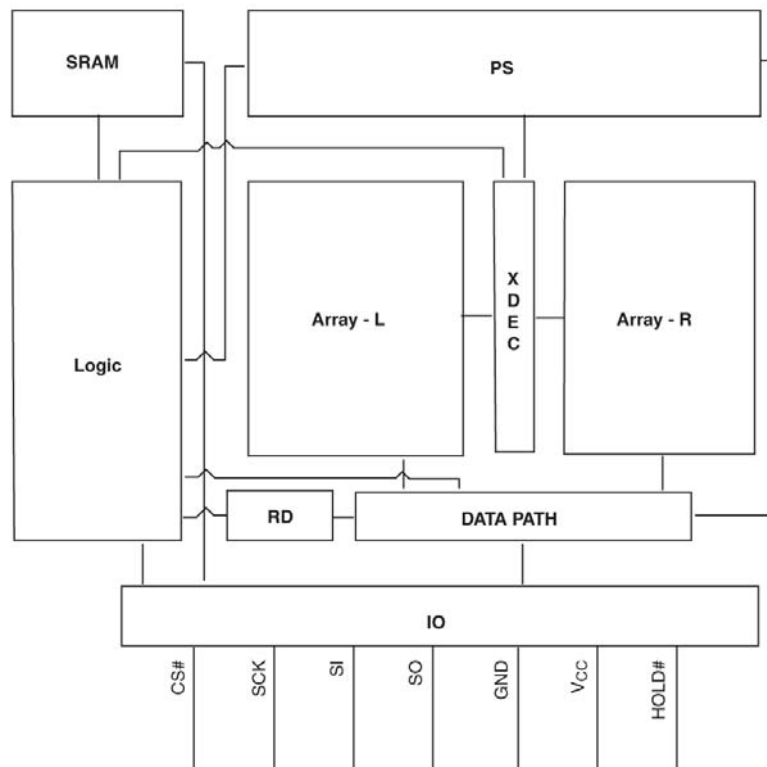


IC6750_C0DBGYY02242_AP2128K-ADJTRG1

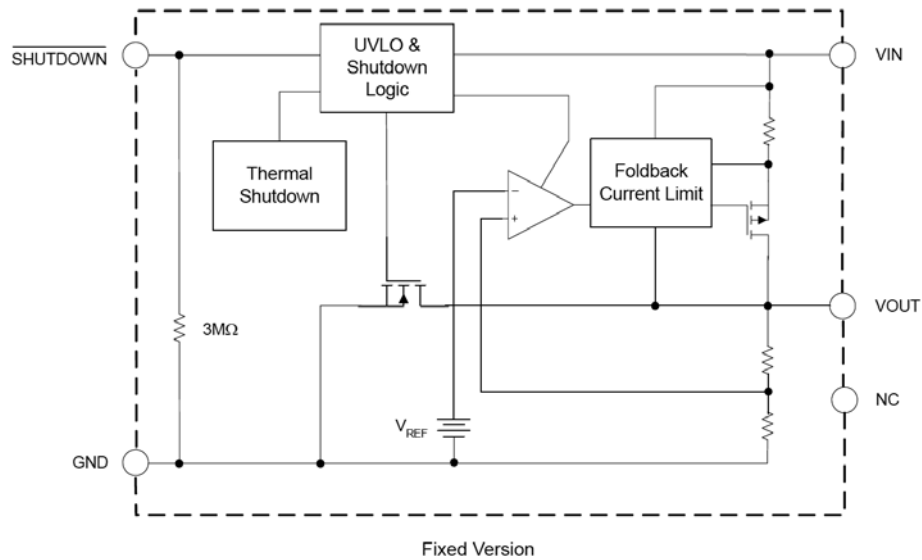


IC5500 Main Chip signal processor

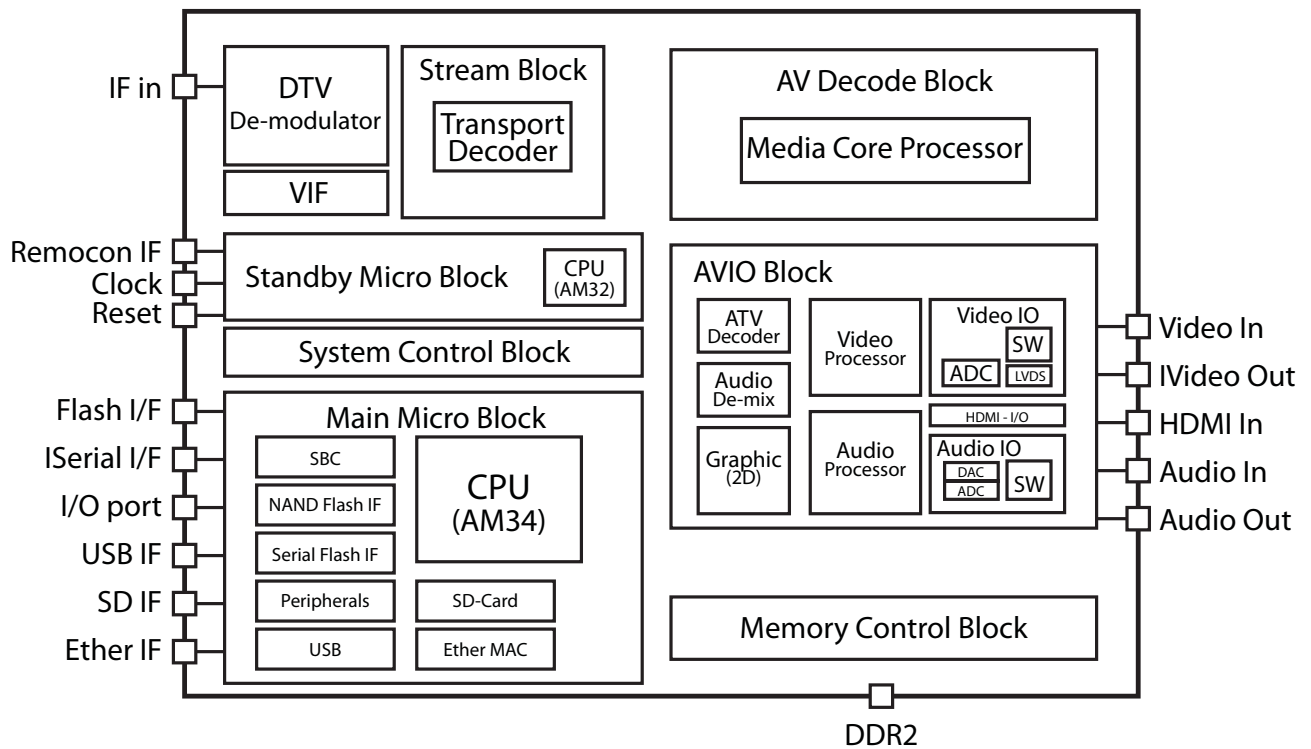

IC6600_C0DBZYY00485, USB Protection

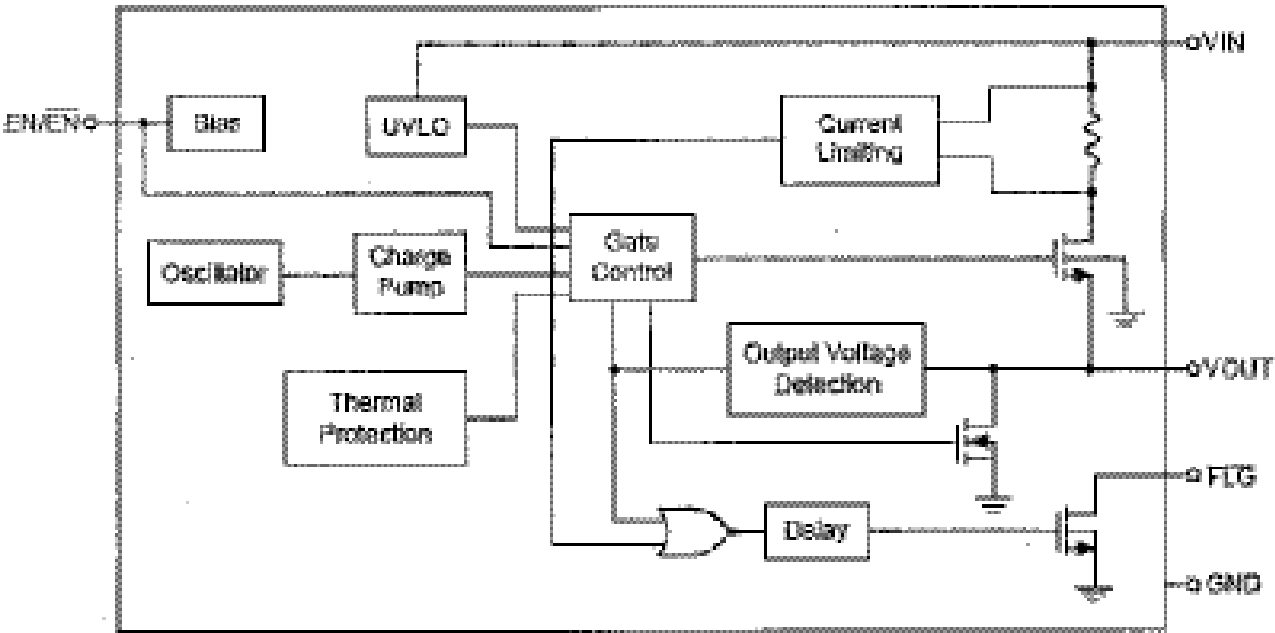


IC6700_C0CBAYG00009_LM1117S-ADJ

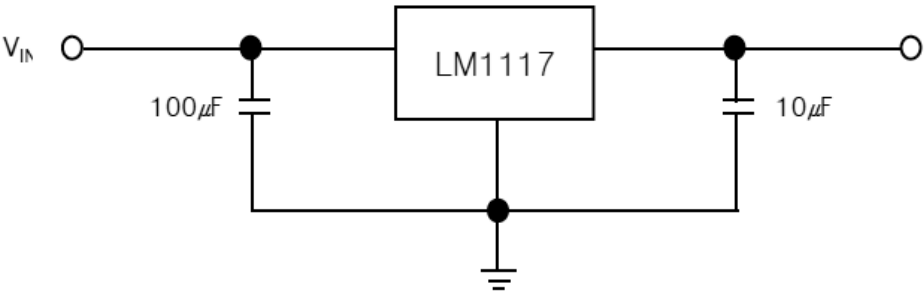


IC6560_C0JBAA000502_TC7SET08FU


PIN ASSIGNMENT (TOP VIEW)

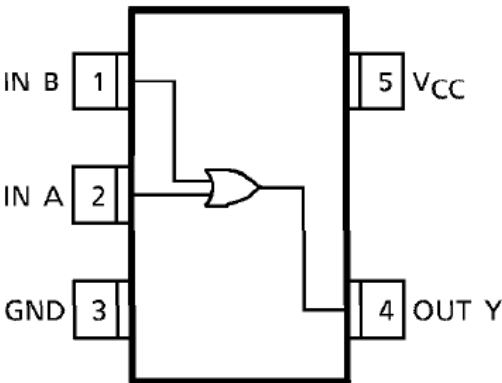

IC6720_C0DBAYY01122_BD9328EFJ-E2

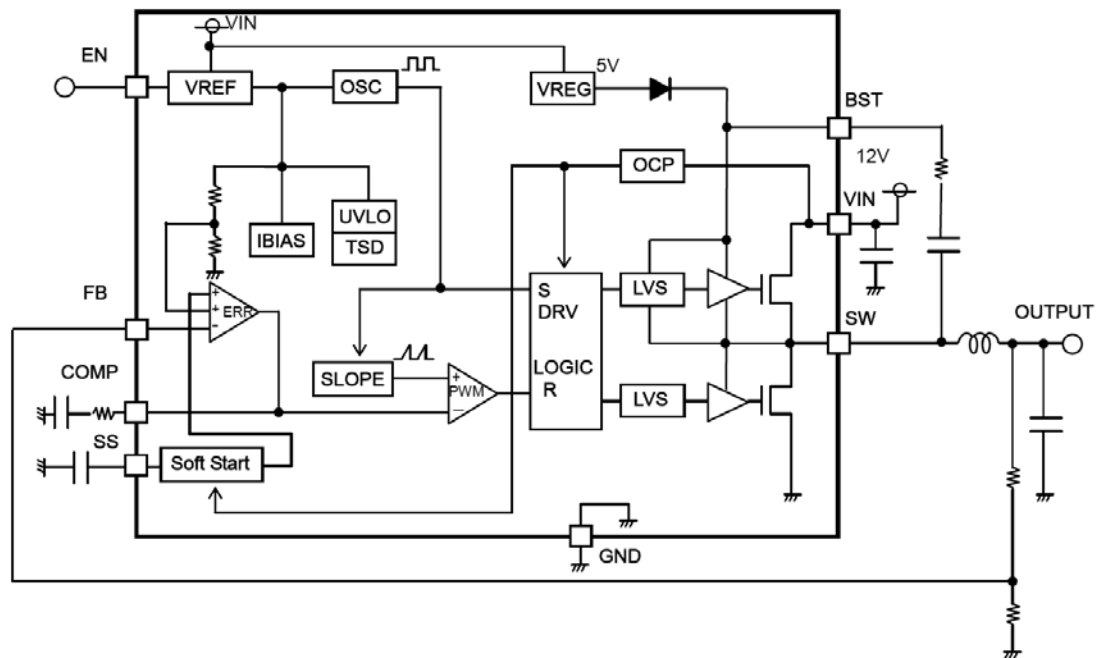


IC5700_C3ABSY000102_IC H5PS5162GFR-S6C

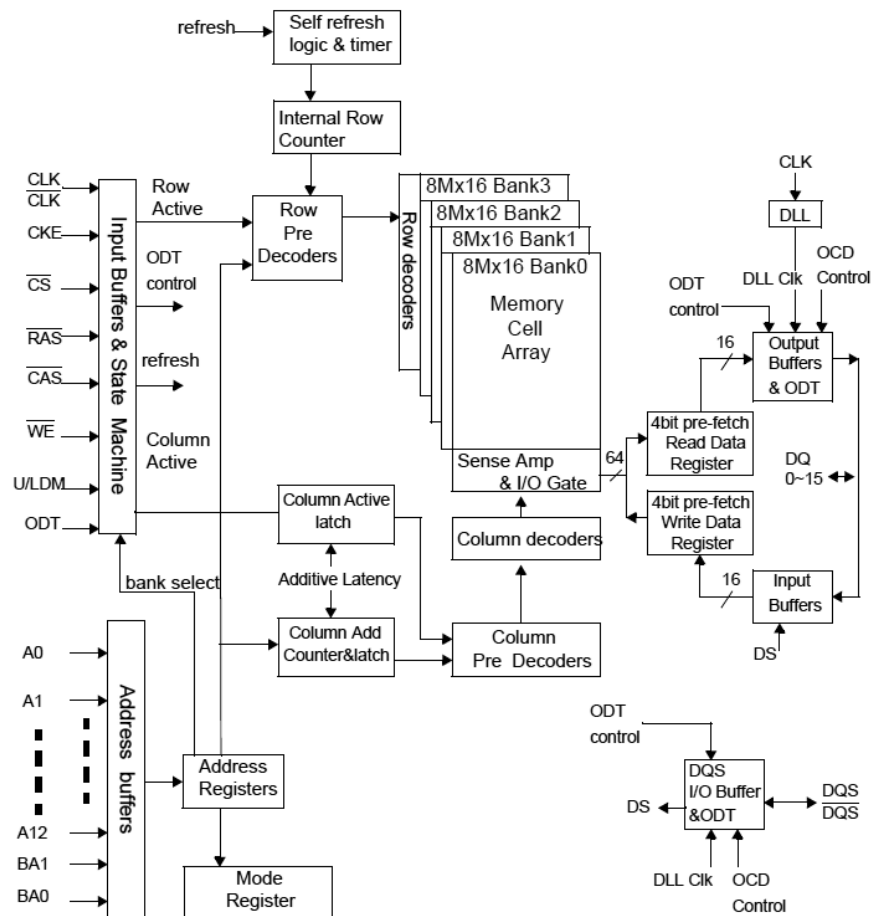


TROUBLESHOOTING FLOW CHARTS


NO POWER

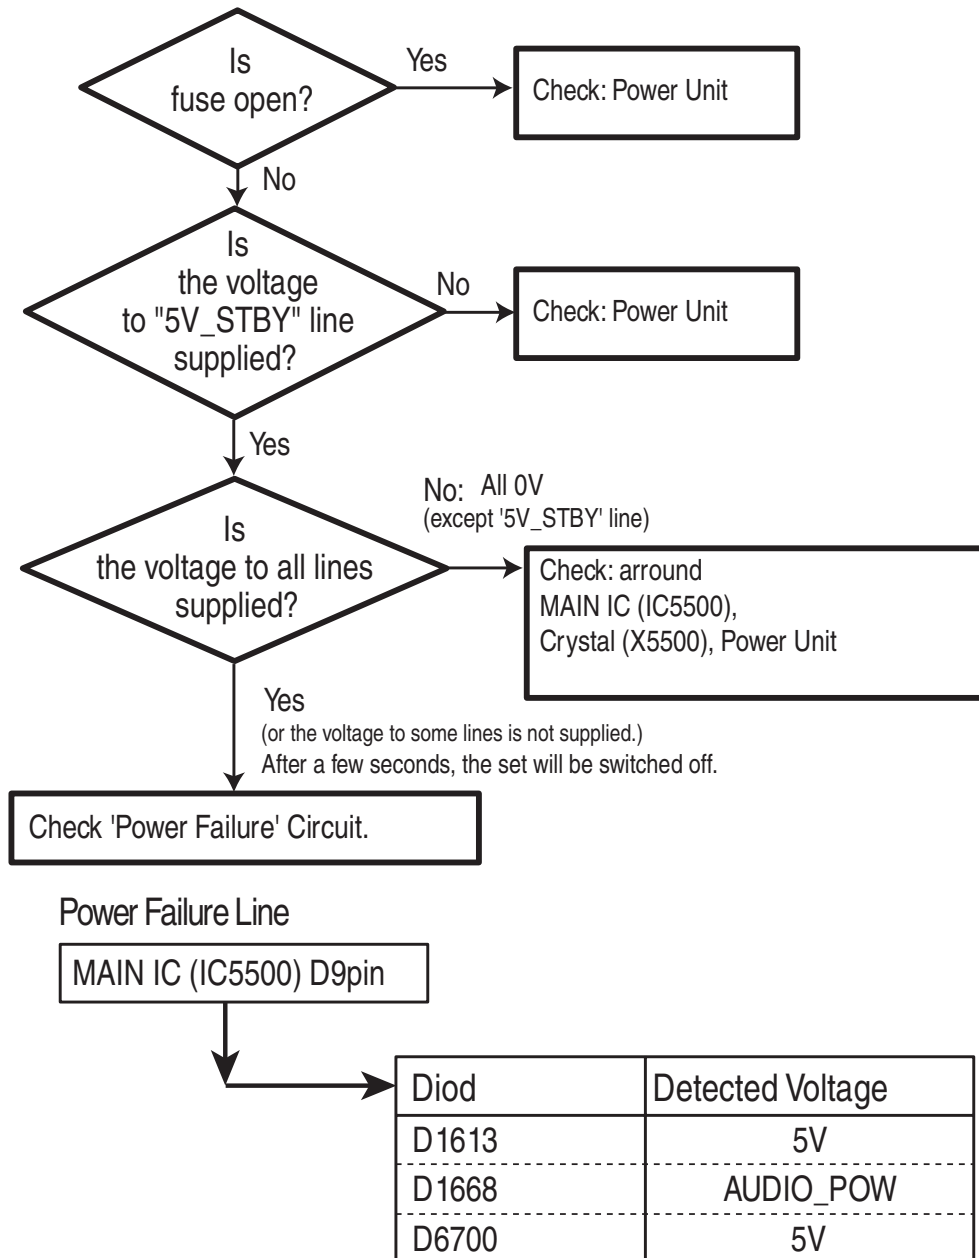

NO VIDEO

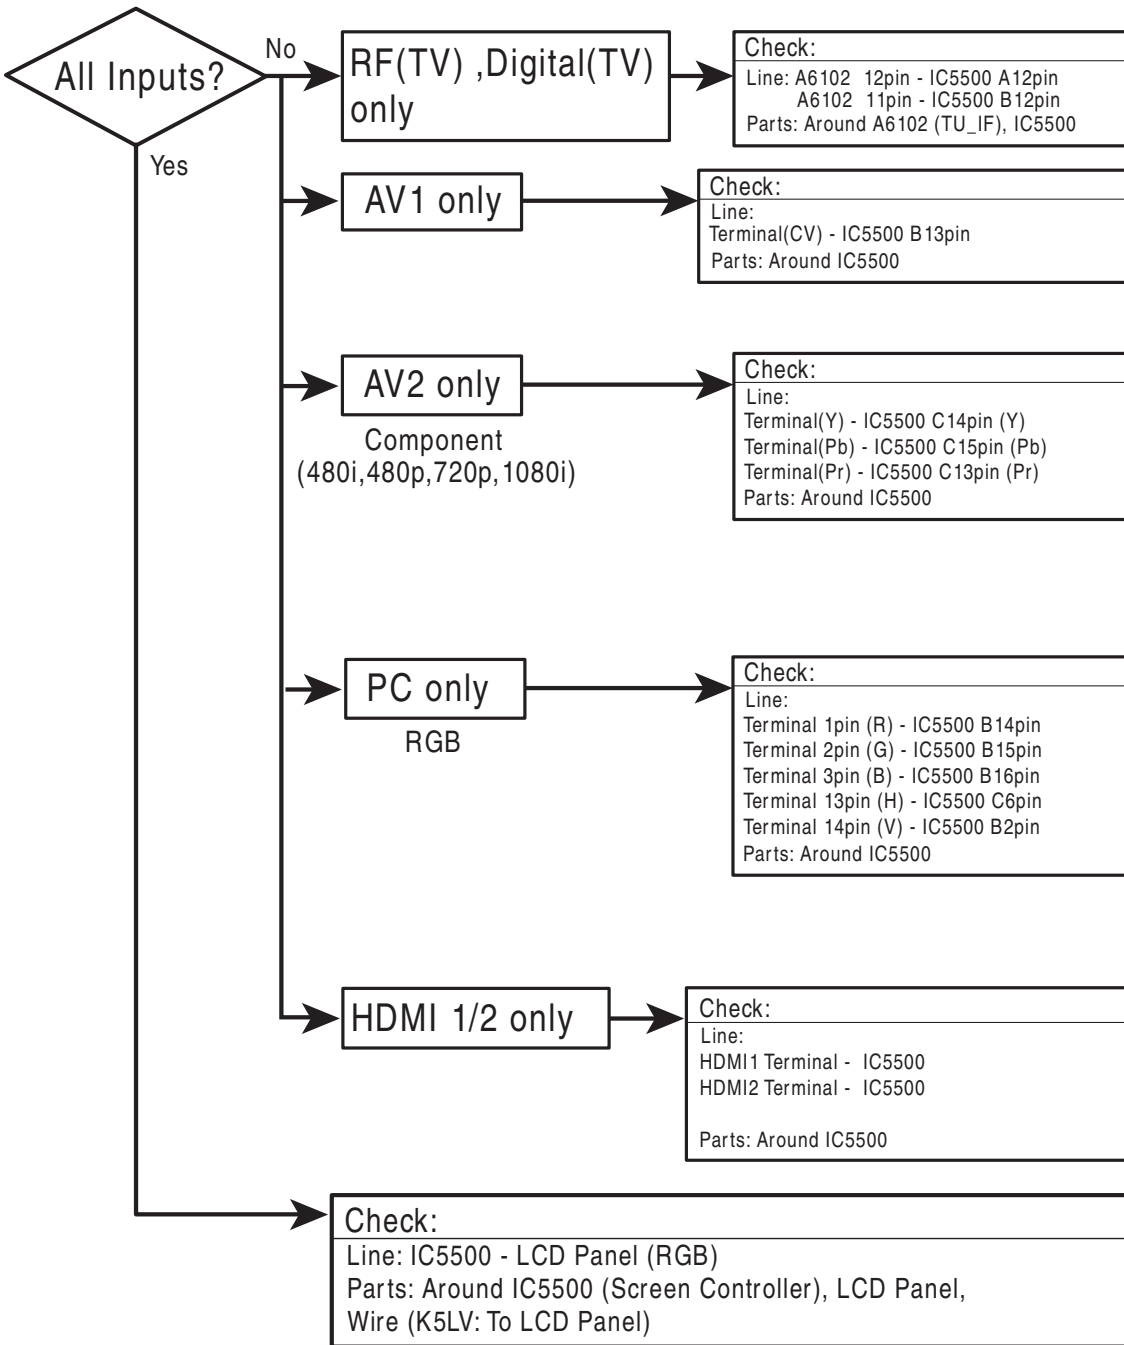



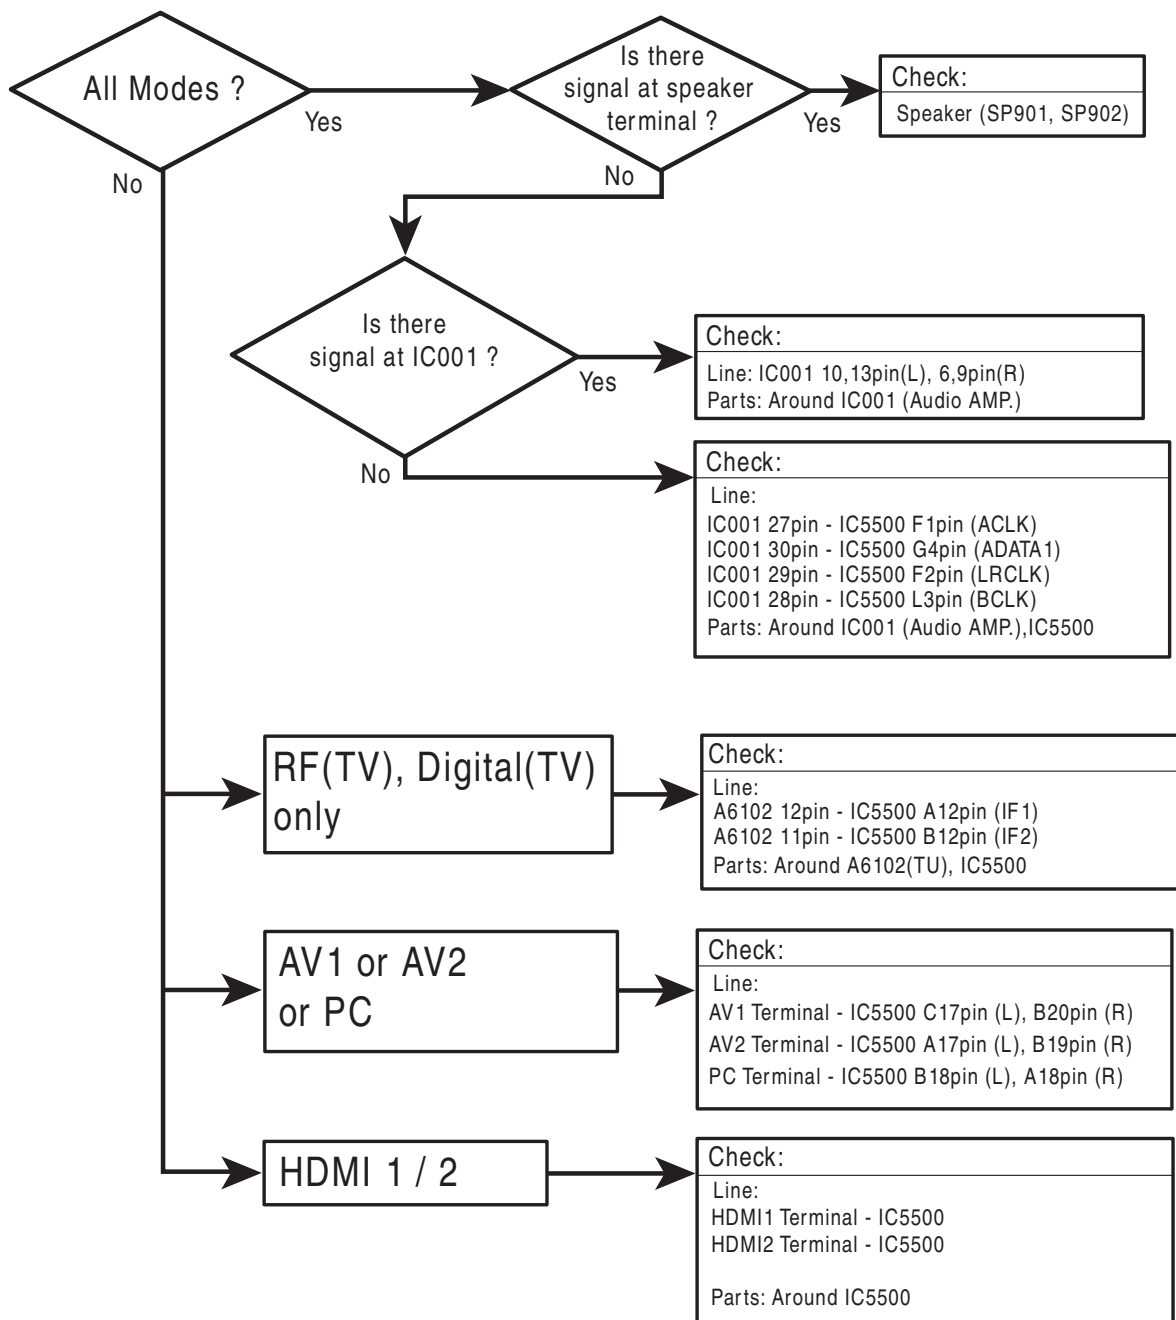

NO AUDIO



SCHEMATIC NOTES

NOTES ON SCHEMATIC DIAGRAMS

1. All resistance values in ohms K=1,000 M=1,000,000.
2. Resistors specified with resistance value are "1/6DJ."
3. Resistors specified with type of resistor, tolerance and resistance value are "1/4."
4. Unless otherwise noted on schematic, all capacitor values less than 1 are expressed in μF (Micro Farad), and the values more than 1 are in pF.
5. All capacitors are 50 WV rating unless otherwise noted.
6. Unless otherwise noted on schematic, voltage reading taken with VOM from point indicated to chassis ground. Voltage reading taken using color-bar signal VHF channel 5, all controls at normal. Line voltage at 120 volts. Some voltages may vary with signal strength.
7. Waveforms were taken with color-bar signal and controls set for normal picture. Waveforms marked with an * may vary with signal strength.
8. The Symbol  indicates a fusible resistor, which protects the circuit from possible short circuits.
9. Parts enclosed with  are related with X-radiation.
10. Isolation border line.  Cold Side  Hot Side
11. Schematic part location numbers may not always match the schematic symbols.
The schematic symbols and part descriptions are correct and should be used.
The part descriptions will be listed under the location number in the parts list.





ELECTROSTATICALLY SENSITIVE DEVICES

Many solid-state devices (especially Integrated Circuits) are Electrostatically Sensitive, and, therefore, require special handling techniques as described under "Servicing Electrostatically Sensitive Devices," on page two in this service literature.

SERVICE NOTES:


1. When replacing parts on circuit boards, clamp the lead wires to terminals before soldering.
2. When replacing high wattage resistors on circuit board, keep the resistor body 10 mm (3/8) from circuit board.
3. Keep wires away from high voltage and high temperature components.

PRODUCT SAFETY NOTICE


THE COMPONENTS DESIGNATED BY A  ON THIS SCHEMATIC DIAGRAM DESIGNATE COMPONENTS WHOSE VALUES ARE OF SPECIAL SIGNIFICANCE TO PRODUCT SAFETY. SHOULD ANY COMPONENT DESIGNATED BY A  NEED TO BE REPLACED, USE ONLY THE PART DESIGNATED IN THE PARTS LIST. DO NOT DEVIATE FROM THE RESISTANCE, WATTAGE AND VOLTAGE RATINGS SHOWN.

IC, DIODE, AND TRANSISTOR PIN LAYOUTS


INTEGRATED CIRCUITS

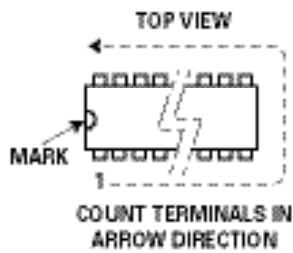

SIDE VIEW

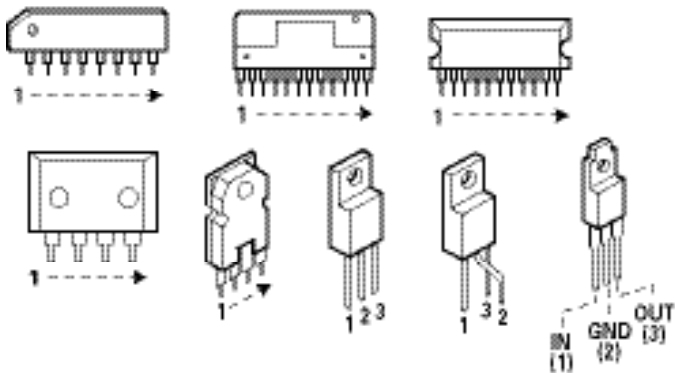


TRANSISTORS

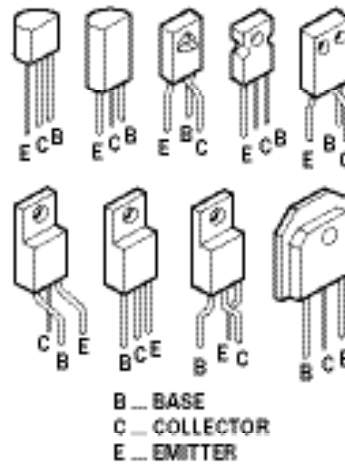


CHIP TRANSISTORS

TOP VIEW

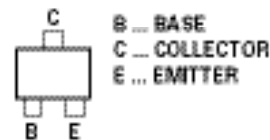


DIODES

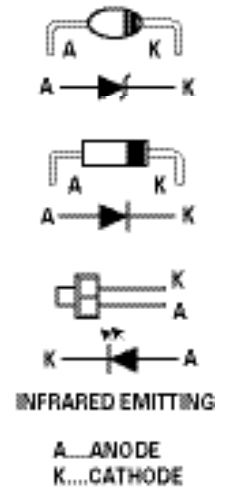

CHIP RESISTORS

TOP VIEW

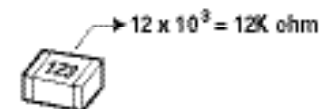





LIST OF REPLACEABLE TRANSISTORS (25A933S TYPE)			
	14TH CODE	25A933S	25A1015
		25A934A	25A1015
AB	71200181	R	Y.G.R
			R
AC	71200182	Q.R	O.Y.G.R
			Q.R
25A1312K CHIP TYPE			
	14TH CODE	25A1719	25A1037
		M6.M7	R.S
AJ	71200221		
(25C174G3 TYPE)			
	14TH CODE	25C174G3	25C1815
AD	71200183	Q.R.S	Q.N.P.A
			Y.G.R
AE	71200202	Q.R.S	R.A.Q.A.P.A
			O.Y.G.R
25C21412K CHIP TYPE			
	14TH CODE	25C21412	25C2412K
		L6.L7	R.S
AH	71200220		

CAPACITOR AND RESISTOR CODE CHART

CAPACITOR (Example)

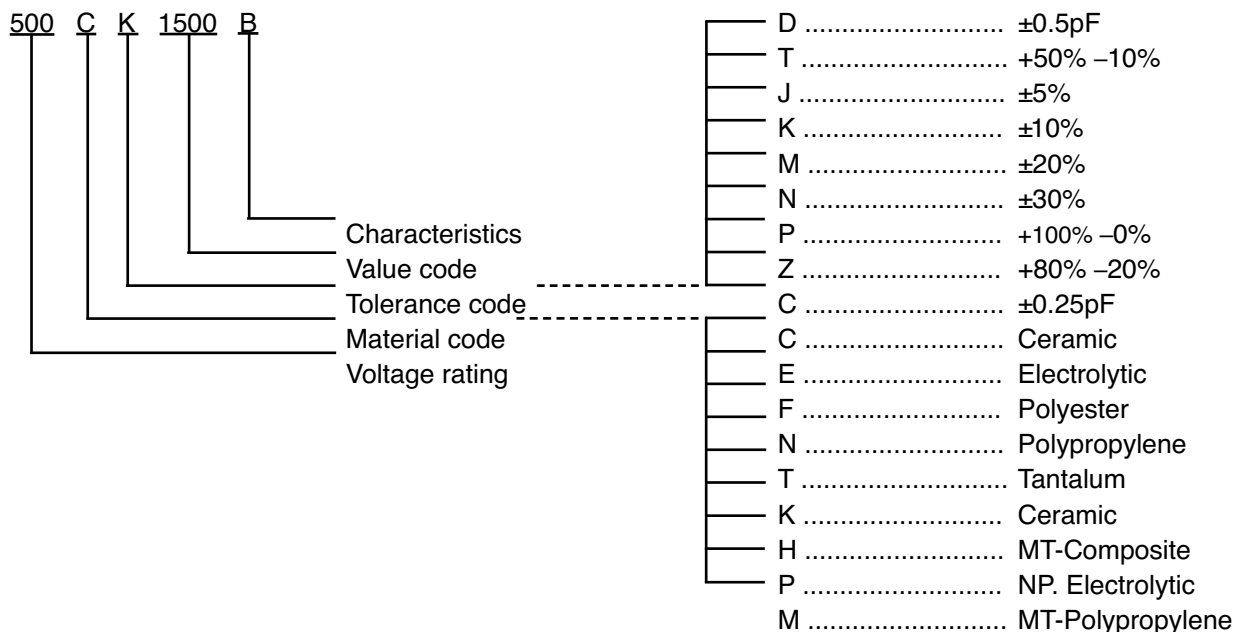


RESISTOR (Example)

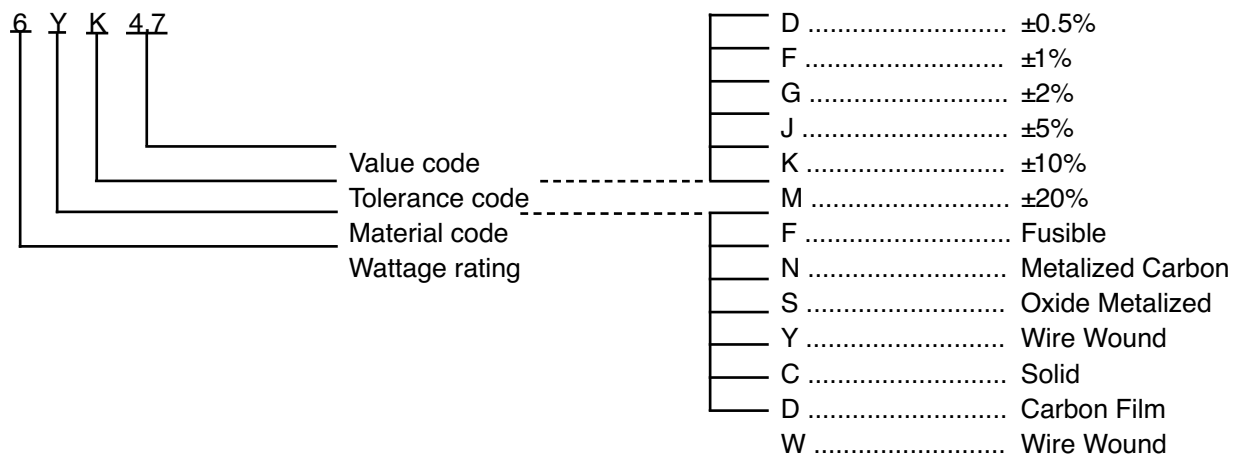


For parts or service contact



Sanyo Manufacturing Corporation
P.O. Box 2000
3333 Sanyo Road
Forrest City, Arkansas 72335-2000

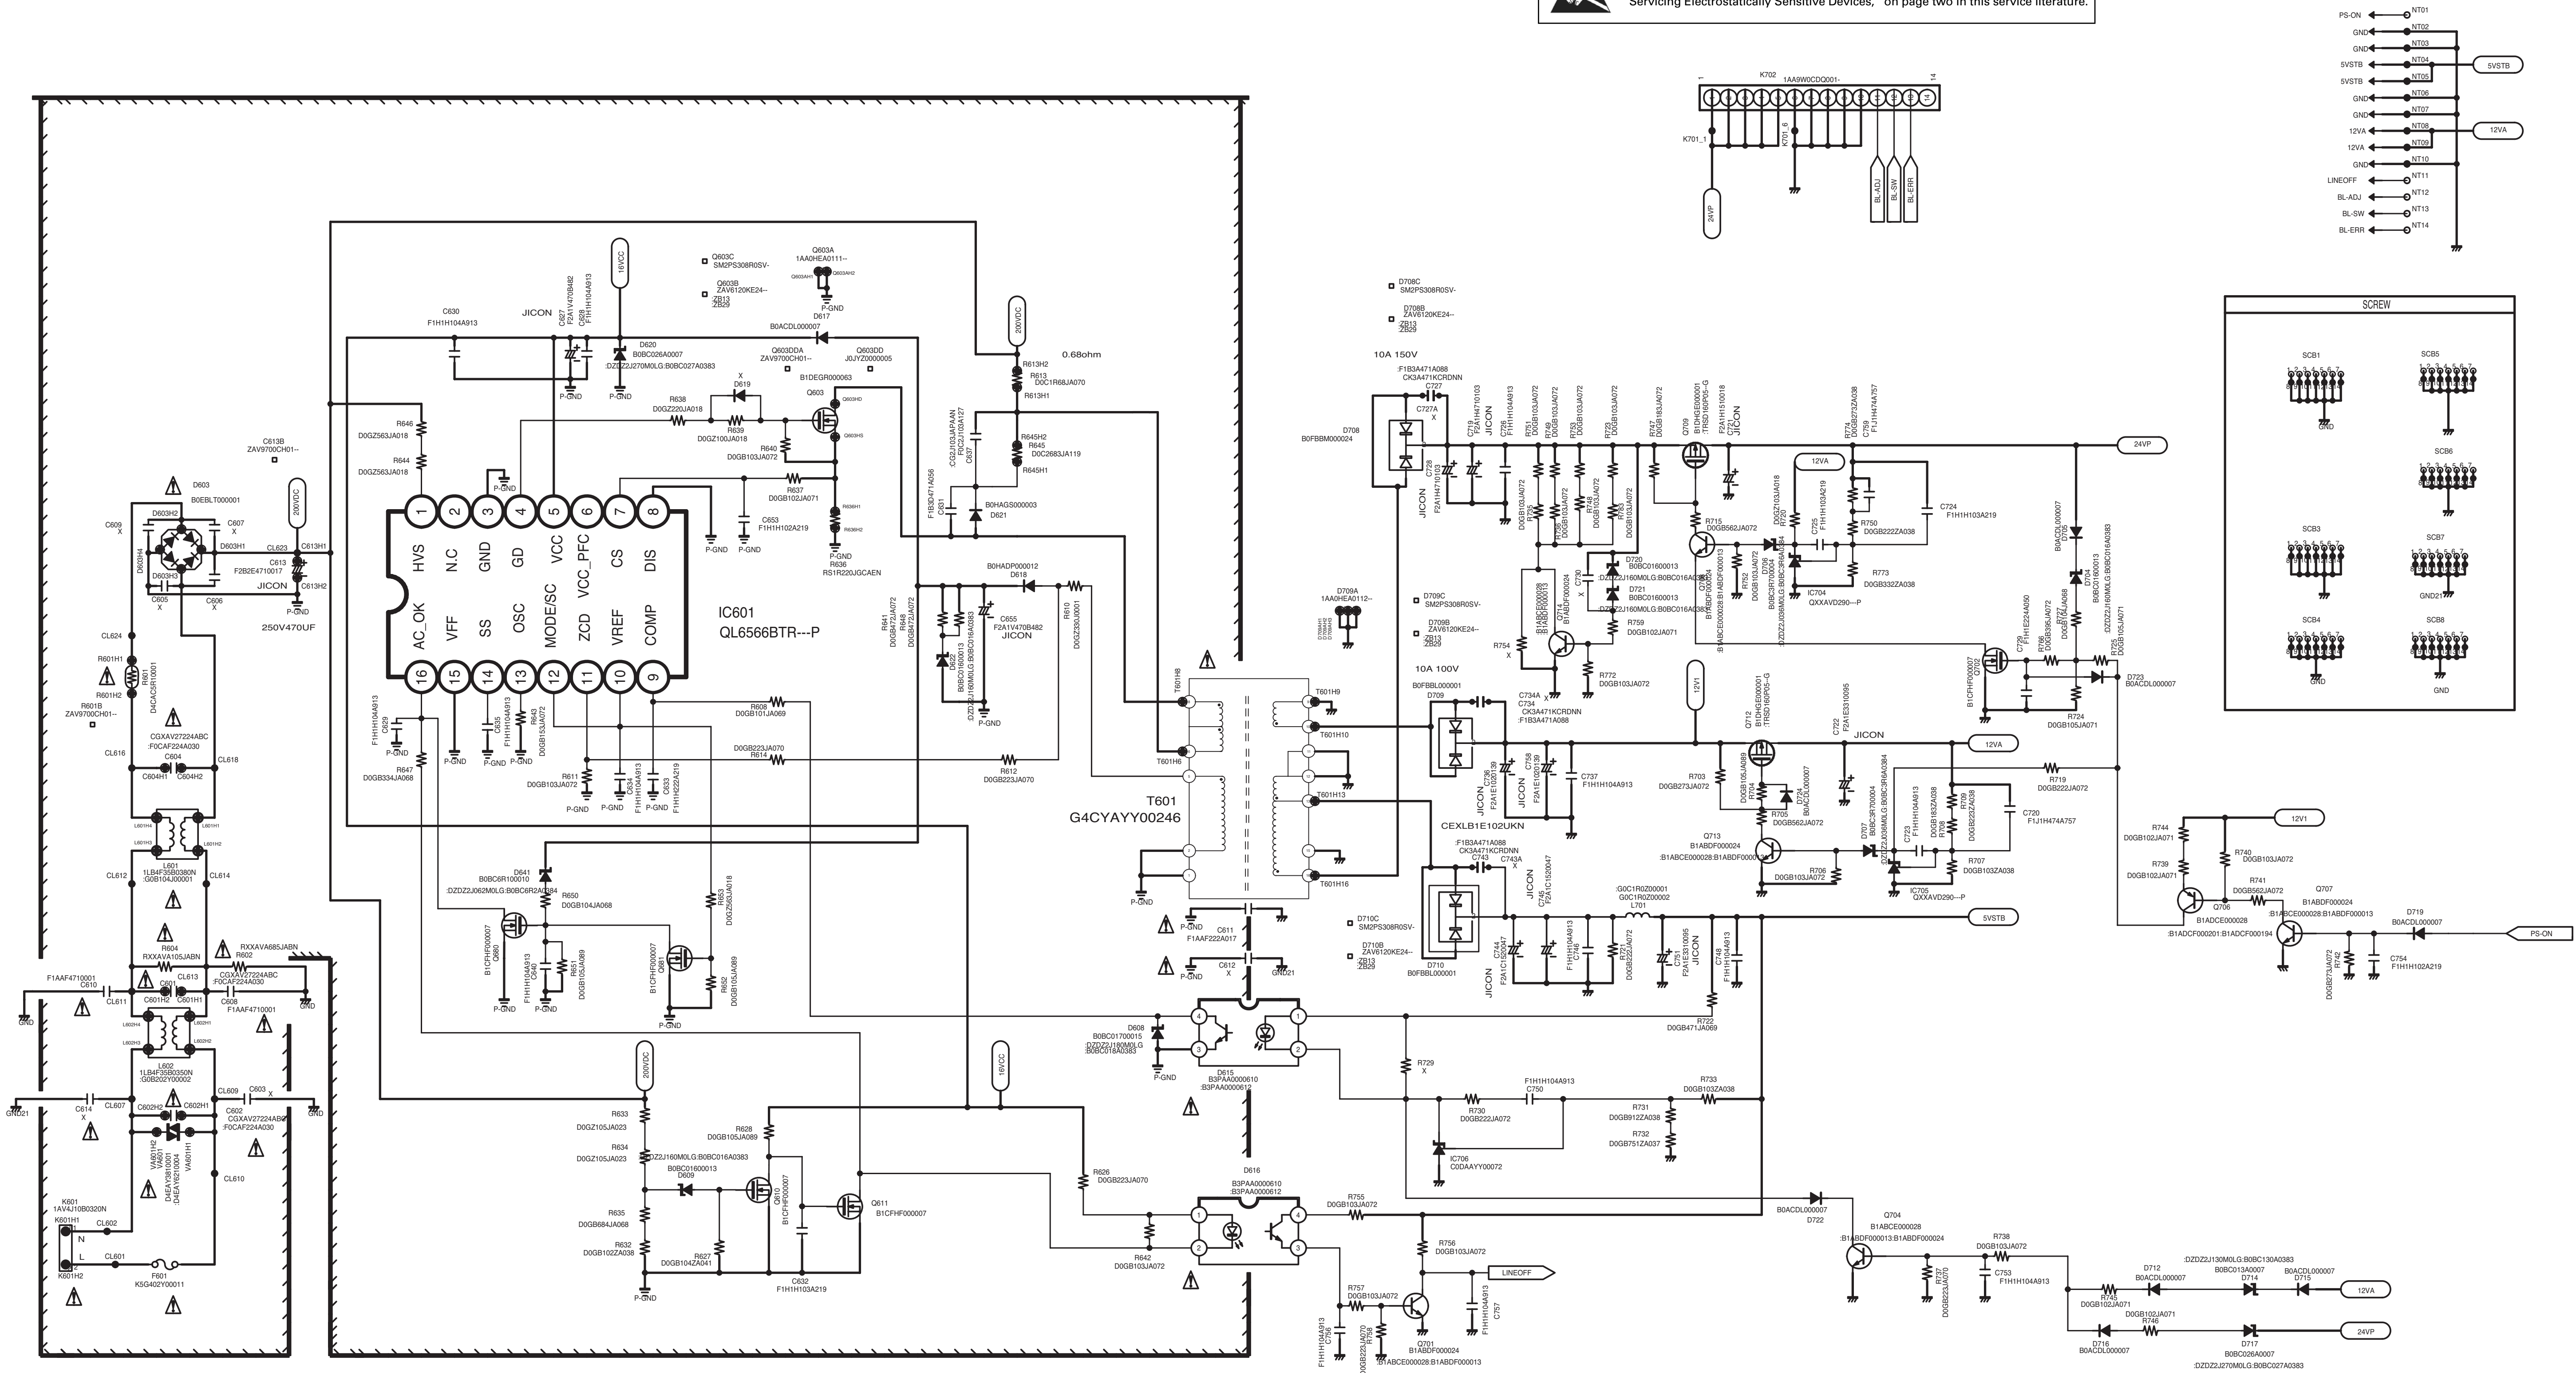







PB1600
☒ 1LG4B10Y087B0
 :1LG4B10Y087BA

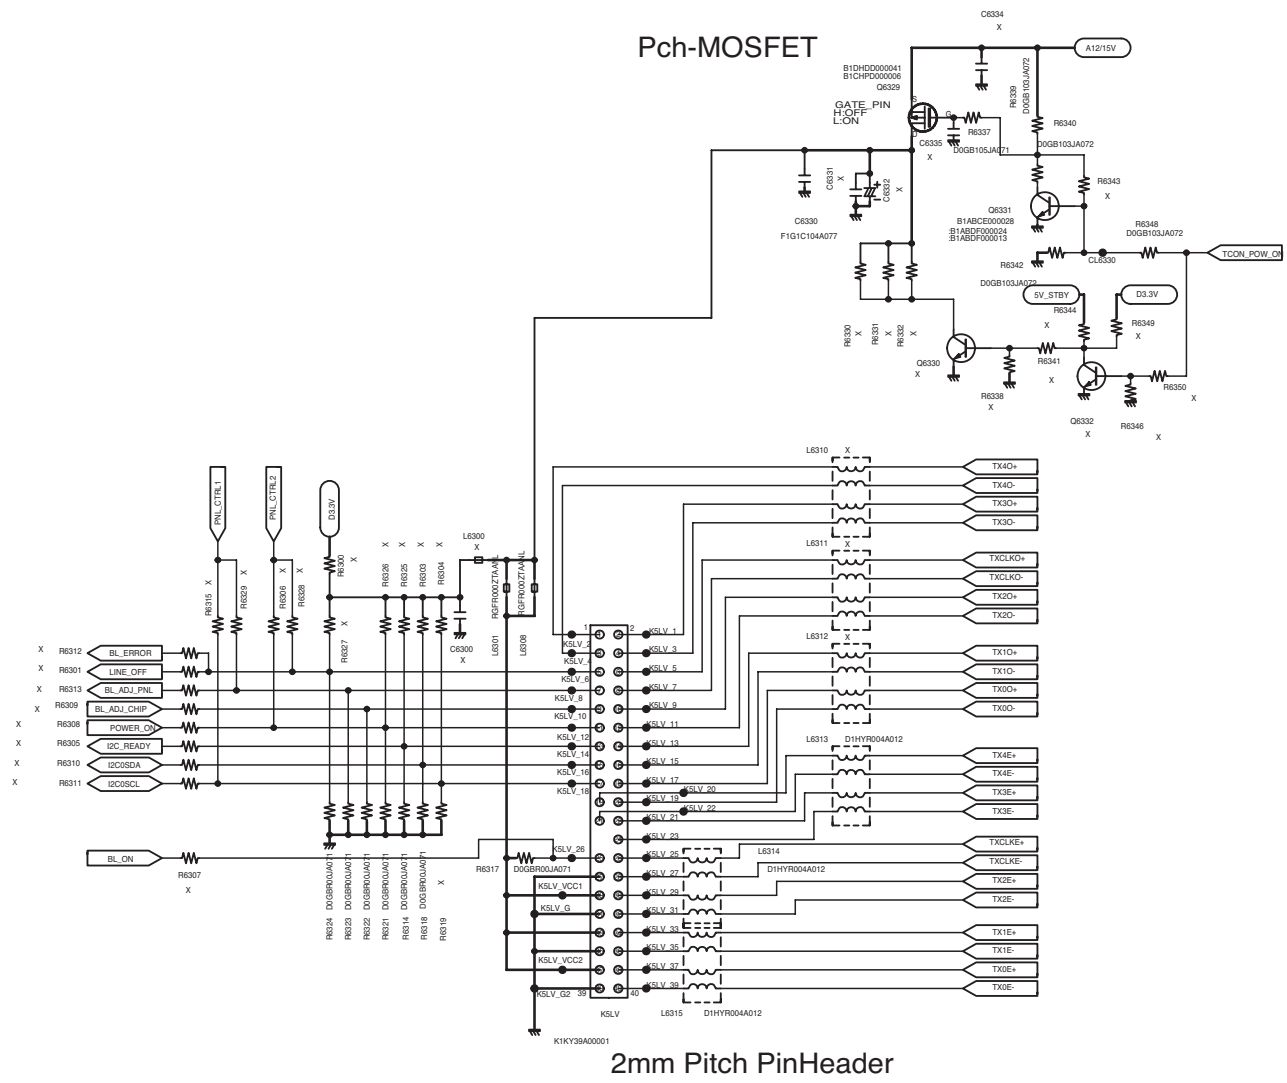


For Debug
2mm Pitch Housing

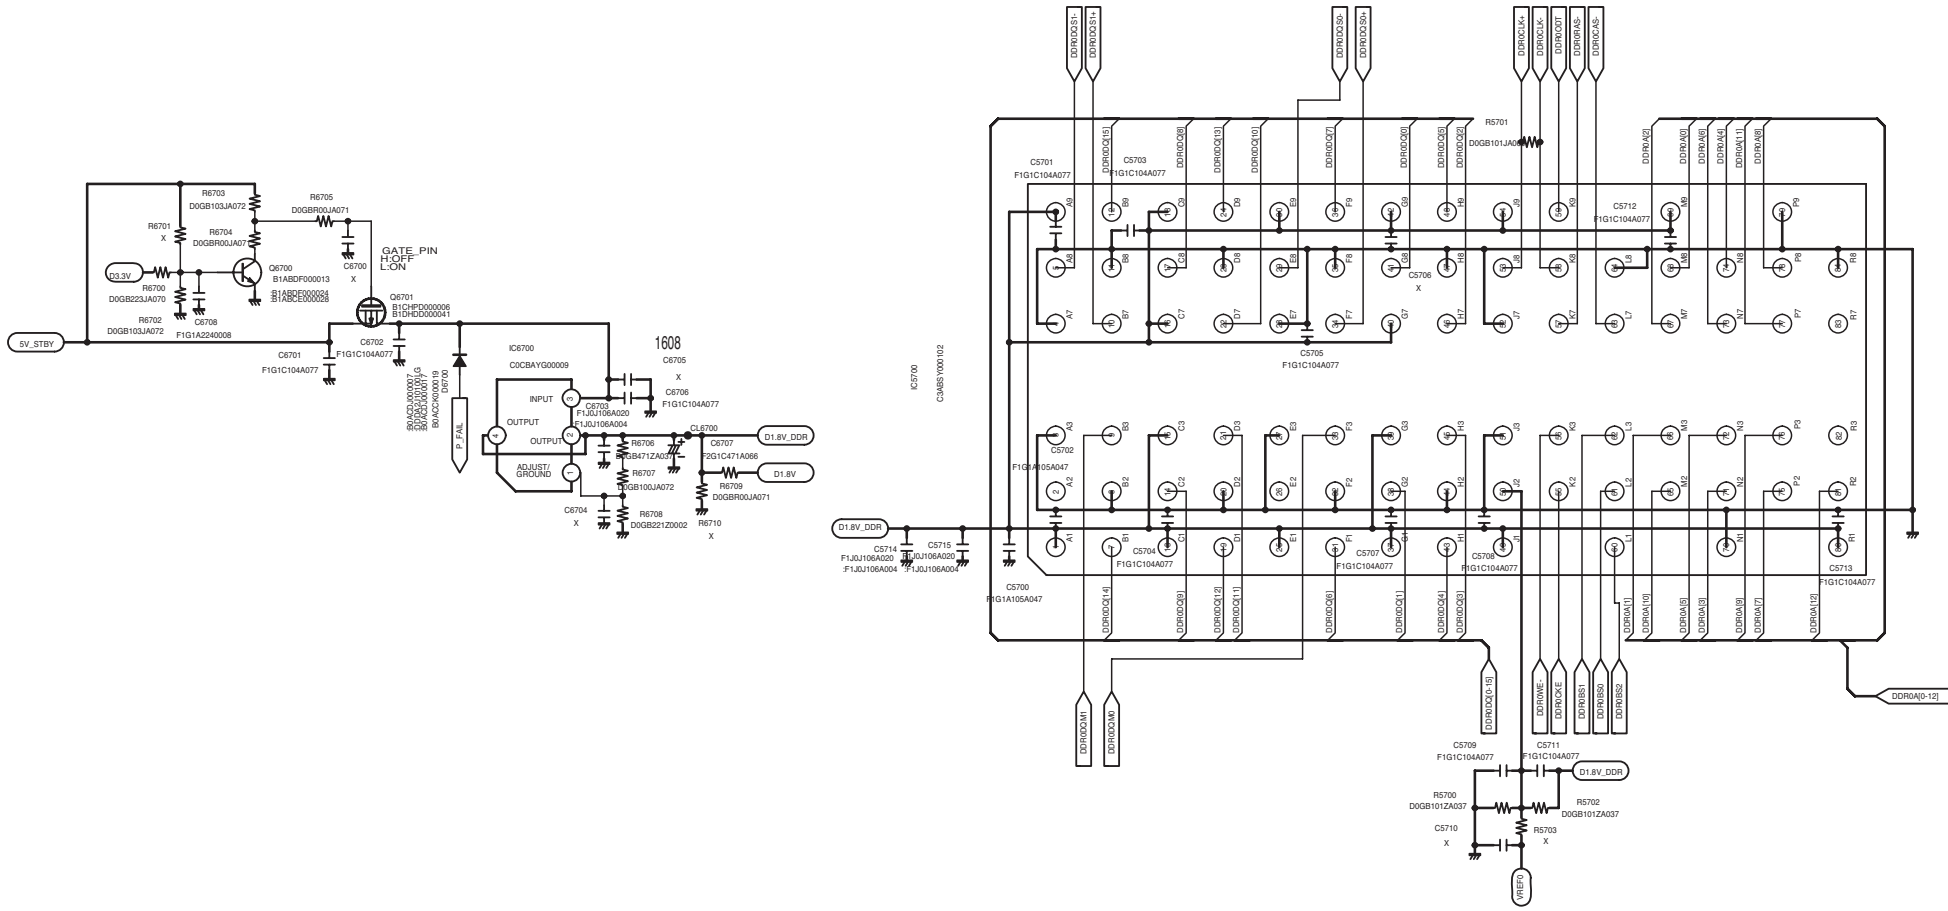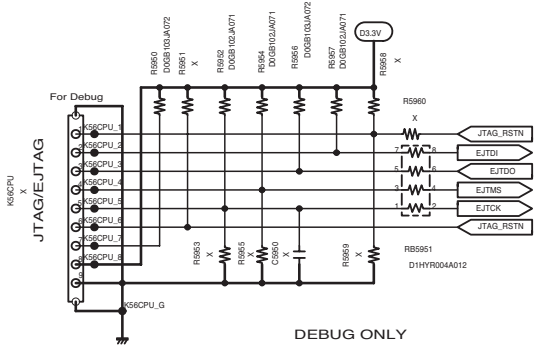


ELECTROSTATICALLY SENSITIVE DEVICES
Many solid-state devices (especially Integrated Circuits) are Electrostatically Sensitive, and, therefore, require special handling techniques as described under "Servicing Electrostatically Sensitive Devices," on page two in this service literature.

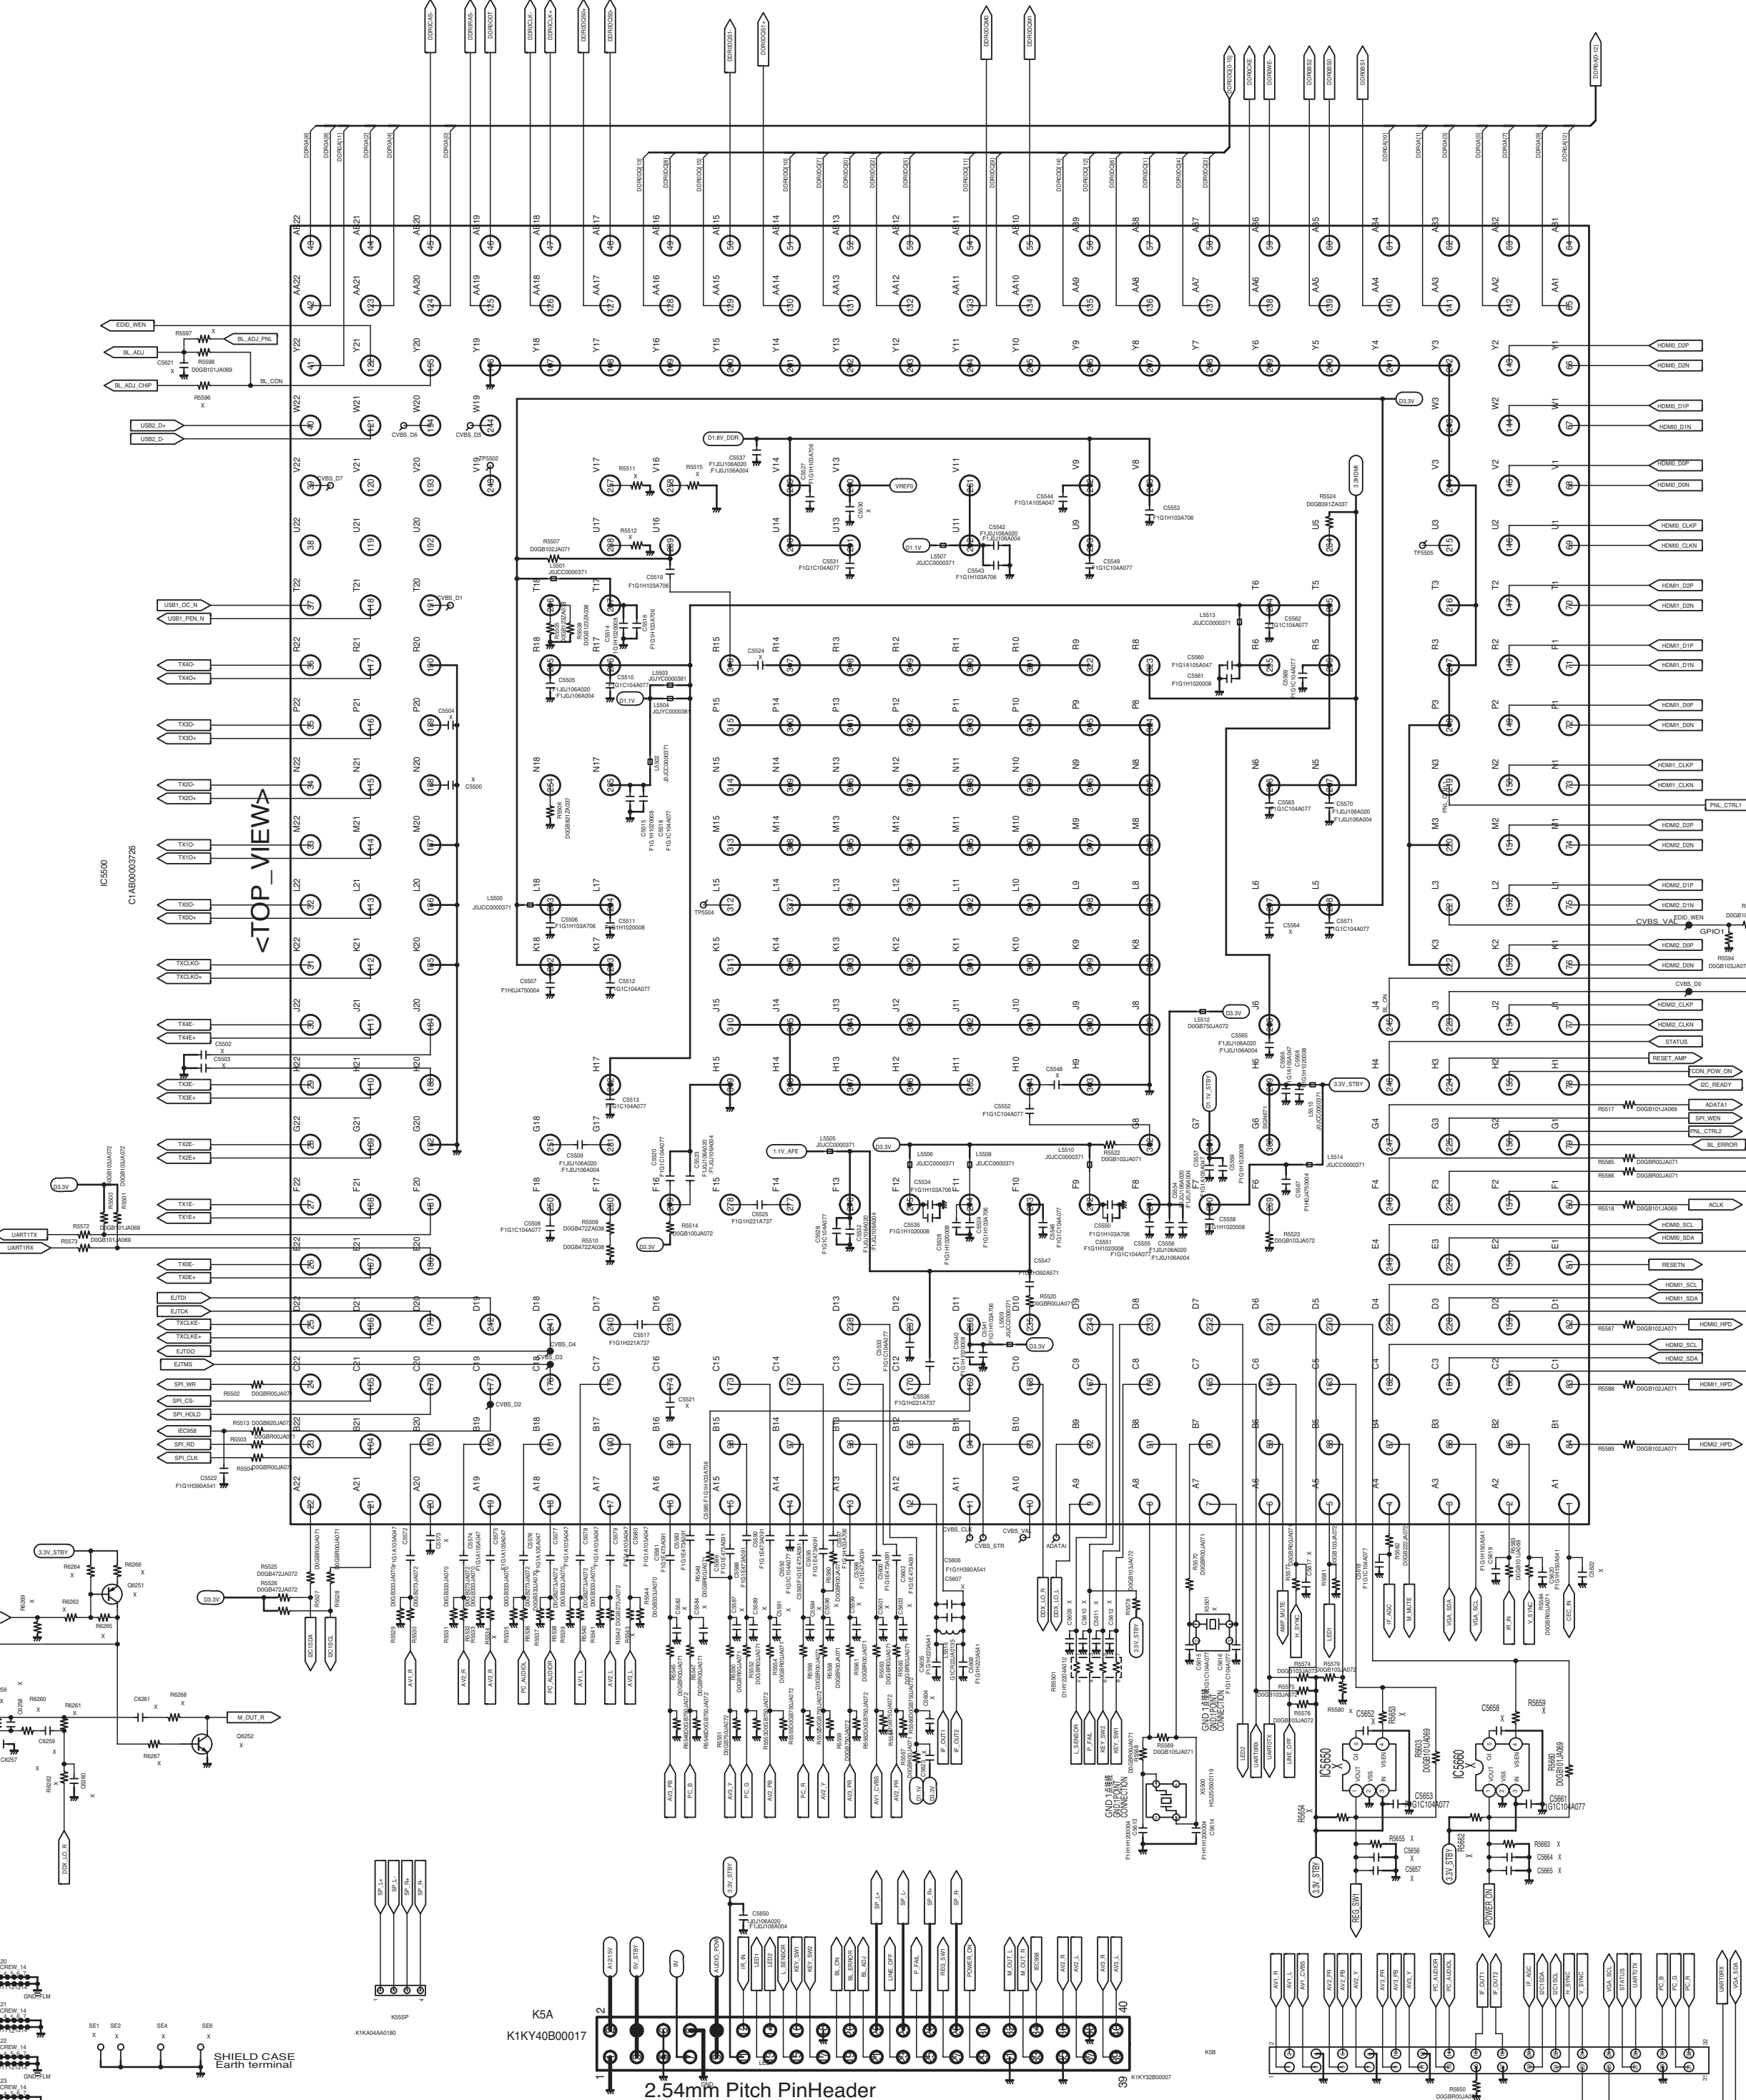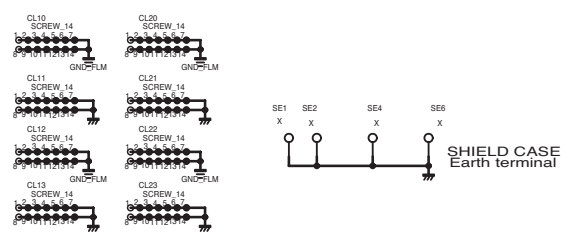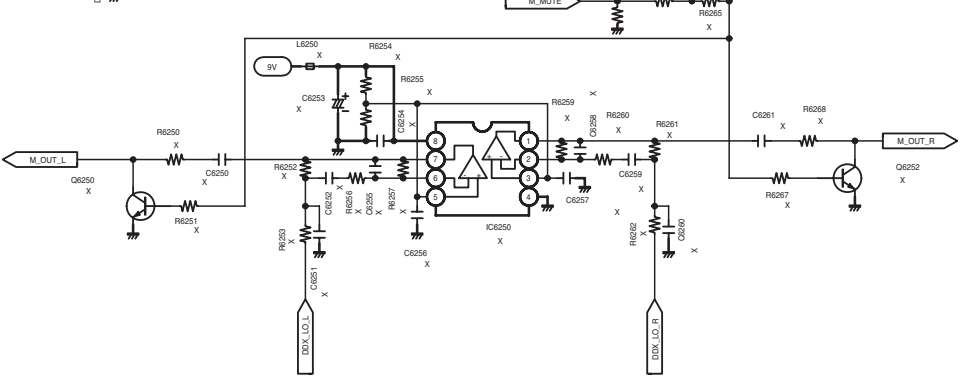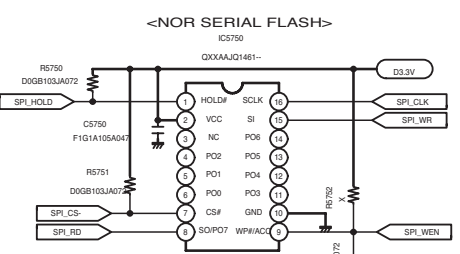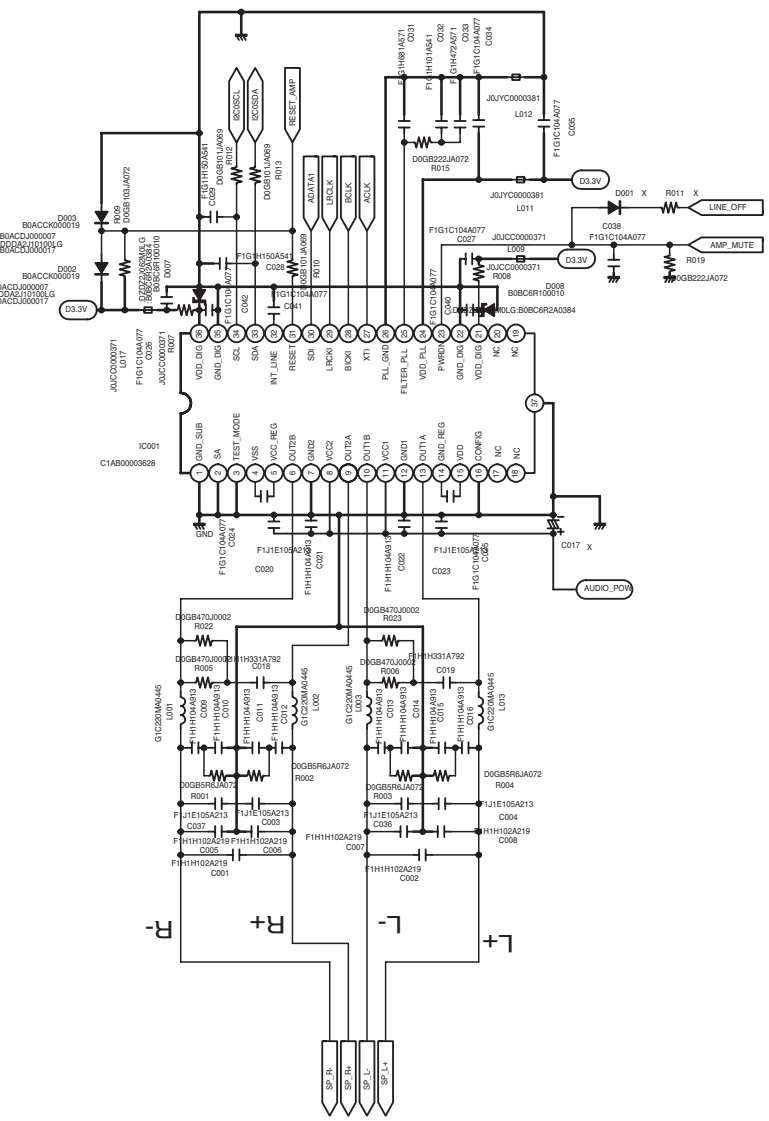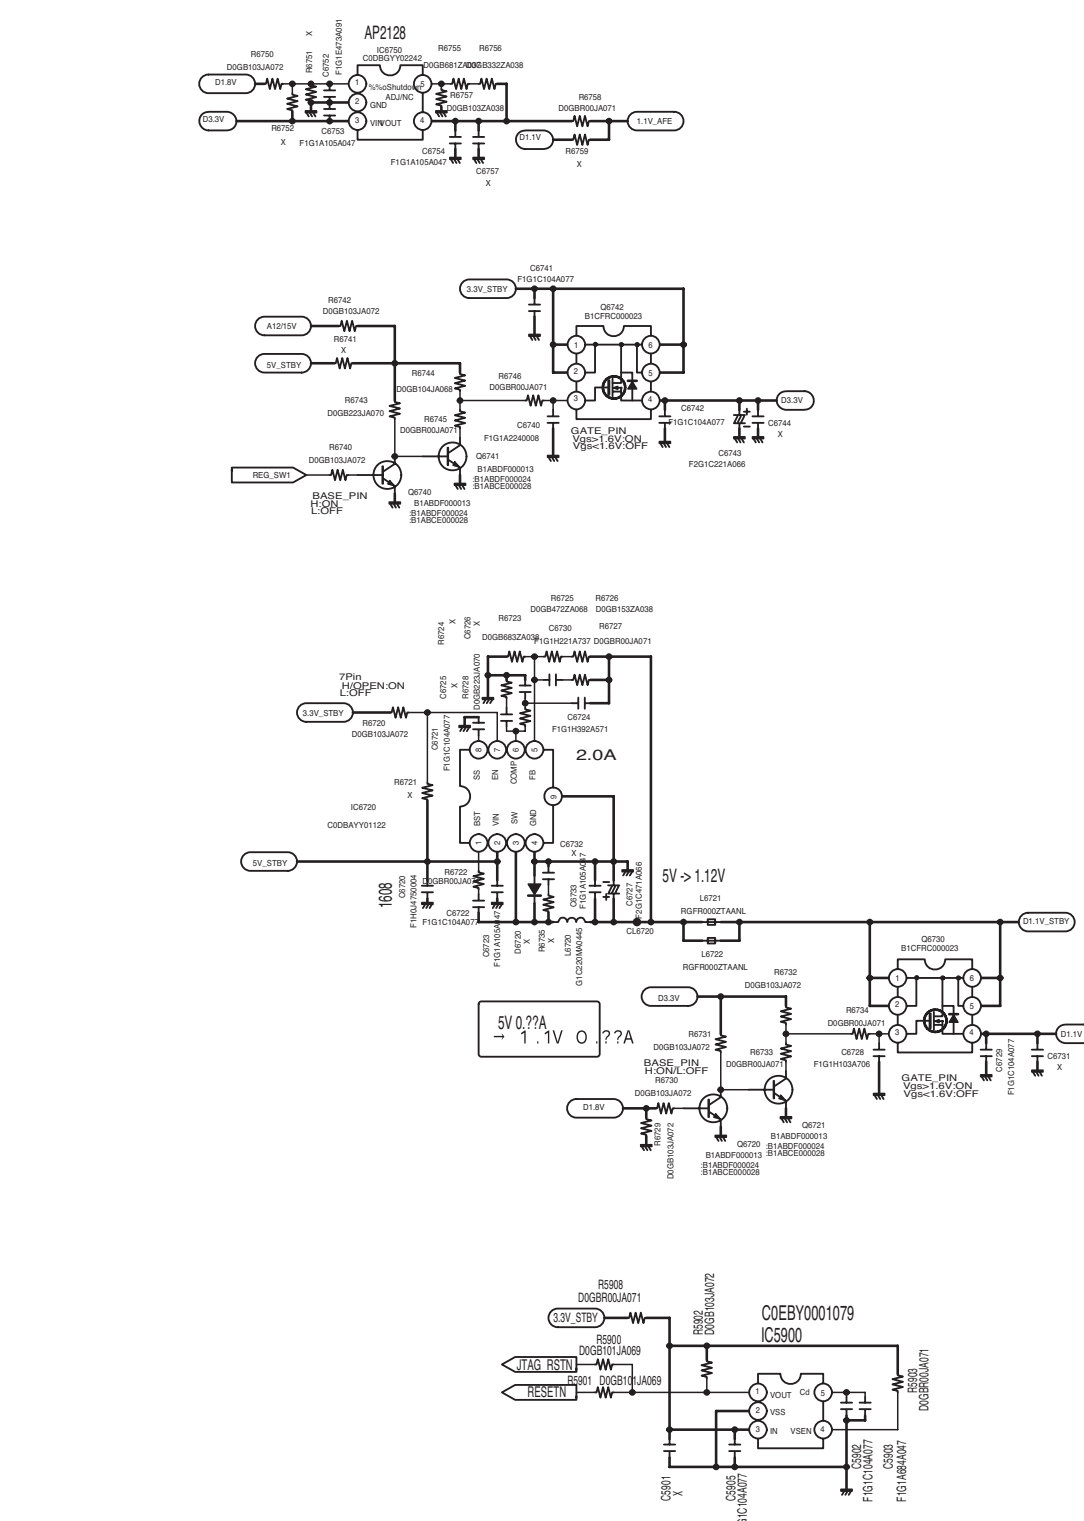


2.54mm Pitch PinHeader

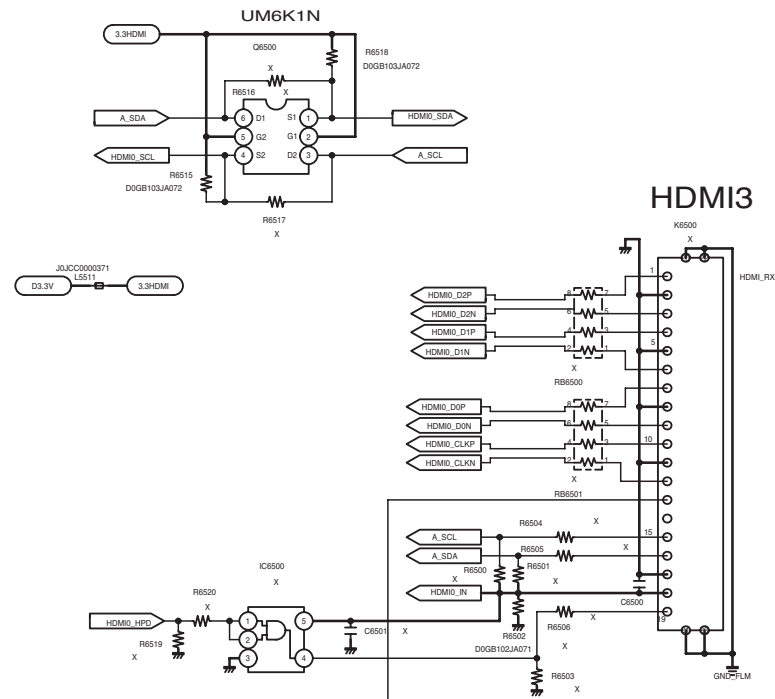



HDMI3

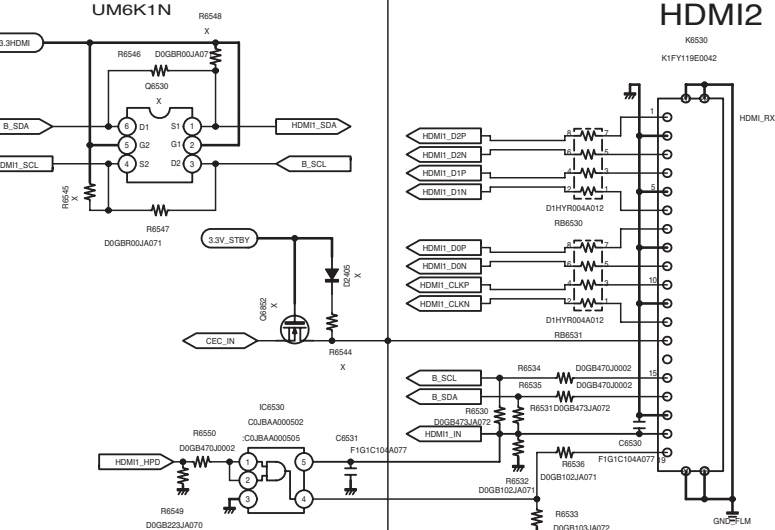

HDMI2

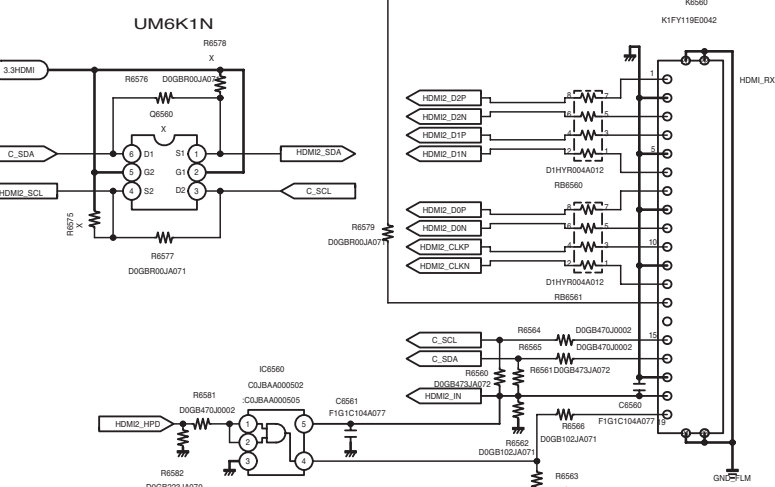


HDMI1

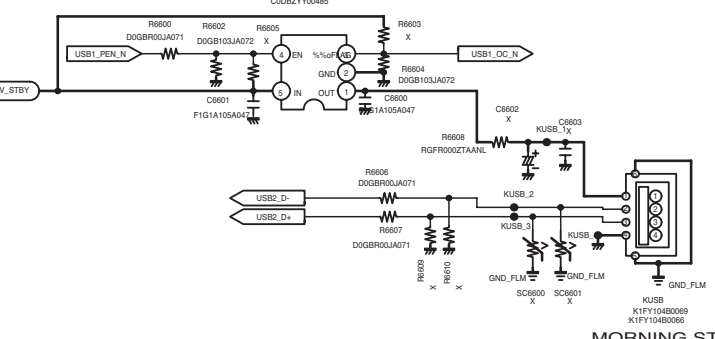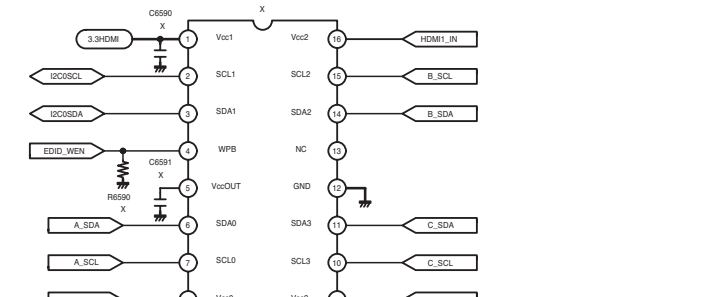


MORNING STAR

NOTE: "J" JUMPER WIRE.
"X" PART NOT USED.



ELECTROSTATICALLY SENSITIVE DEVICES
Many solid-state devices (especially Integrated Circuits) are Electrostatically Sensitive, and, therefore, require special handling techniques as described under "Servicing Electrostatically Sensitive Devices," on page two in this service literature.

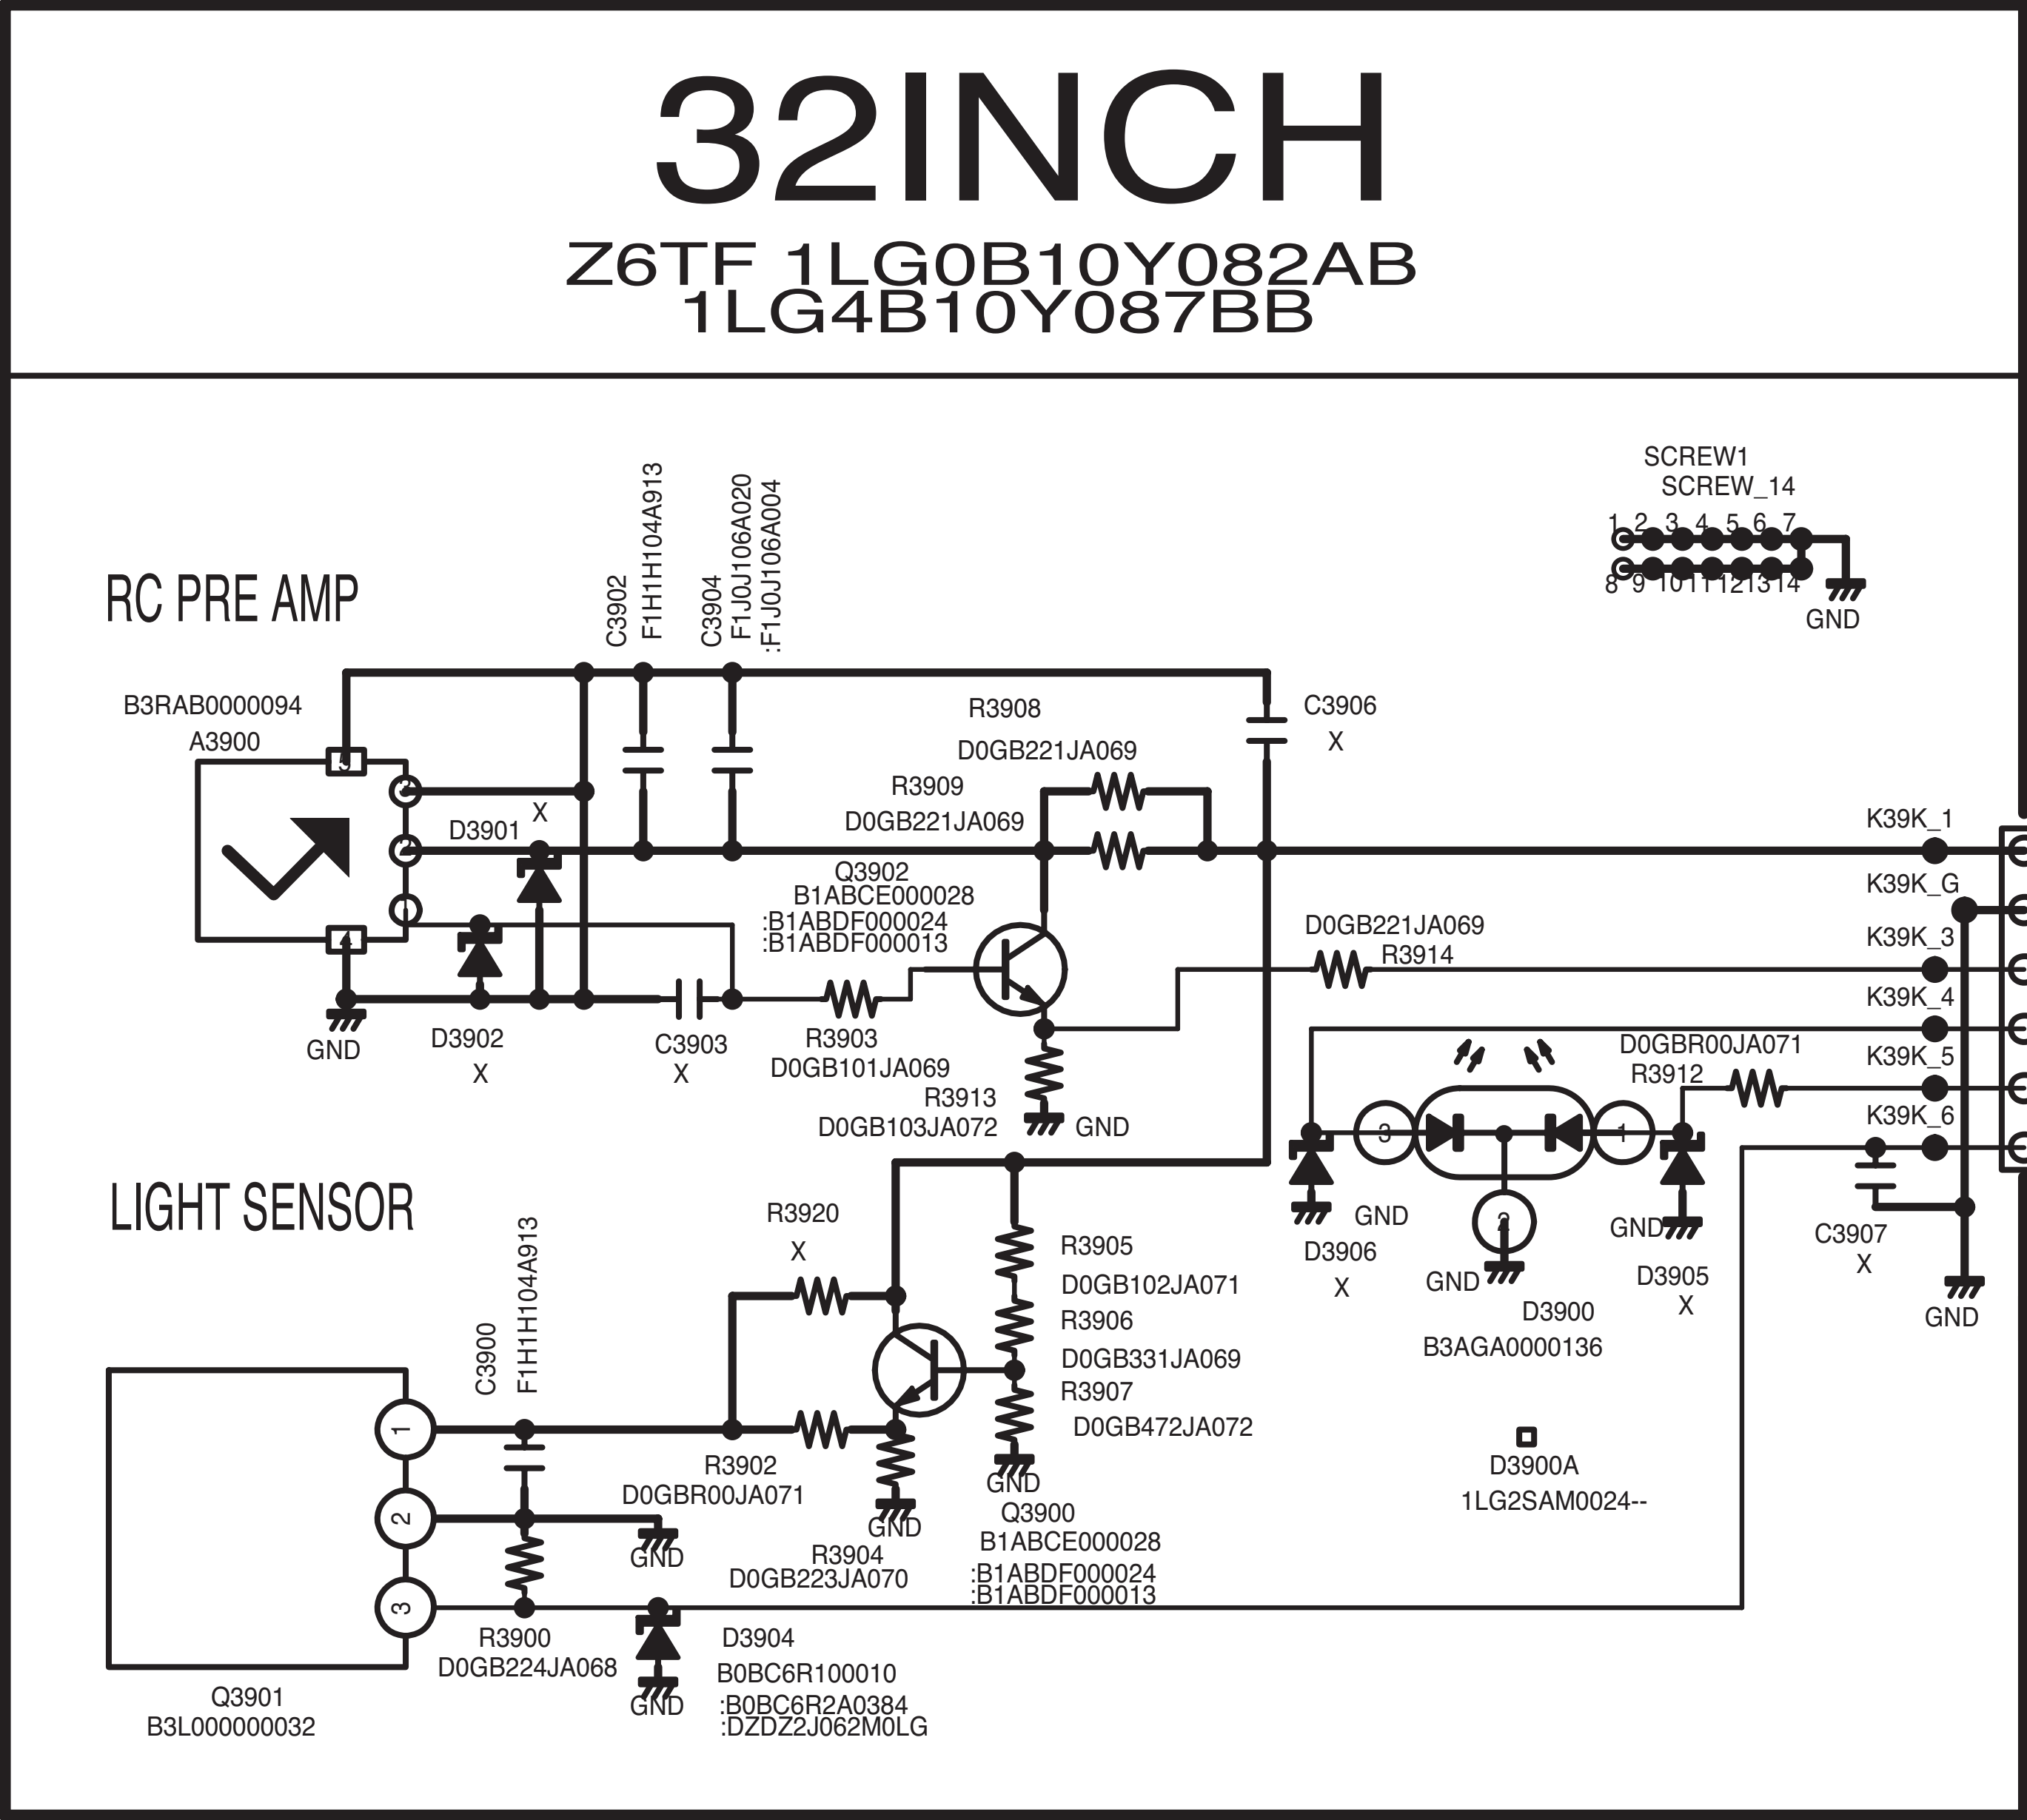

PB3900
1LG4B10Y087B0
:1LG4B10Y087BB